



BSI Standards Publication

Geometrical product specifications (GPS) — Dimensional and geometrical tolerances for moulded parts

Part 4: General tolerances for castings using profile
tolerancing in a general datum system

National foreword

This British Standard is the UK implementation of ISO 8062-4:2017. It partially supersedes BS EN ISO 8062-3:2007, which remains current.

The UK participation in its preparation was entrusted to Technical Committee TDW/4, Technical Product Realization.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2017

Published by BSI Standards Limited 2017

ISBN 978 0 580 78863 5

ICS 17.040.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2017.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL STANDARD

ISO
8062-4

First edition
2017-07

Geometrical product specifications (GPS) — Dimensional and geometrical tolerances for moulded parts —

Part 4: General tolerances for castings using profile tolerancing in a general datum system

*Spécification géométrique des produits (GPS) — Tolérances
dimensionnelles et géométriques pour les pièces moulées —*

*Partie 4: Tolérances générales pour les pièces moulées par
tolérancement de profil dans un système général de références
spécifiées*



Reference number
ISO 8062-4:2017(E)

© ISO 2017



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	3
5 Rules	4
5.1 Rule A: Application of general tolerances for castings	4
5.2 Rule B: General surface profile tolerances	4
5.3 Rule C: General datum system	4
5.4 Rule D: Tolerances overruling the general surface profile tolerances	4
5.5 Rule E: Additional tolerances	5
5.6 Rule F: Machined condition [application case A c)]	5
5.7 Rule G: Required machining allowances (RMAs)	5
5.8 Rule H: Draft angle (taper).....	6
6 General tolerances	7
7 Required machining allowances	9
8 Draft angles (tapers)	10
9 General drawing indication	12
Annex A (informative) Concept of general tolerancing	14
Annex B (informative) Selection of general tolerances	16
Annex C (informative) Selection of required machining allowances (RMAs)	17
Annex D (informative) Example of using general tolerances	18
Annex E (informative) Calculation of the nominal dimension of the moulded condition	21
Annex F (informative) Relation to the GPS matrix model	24
Bibliography	25

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 213, *Dimensional and geometrical product specifications and verification*.

A list of all parts in the ISO 8062 series can be found on the ISO website.

Introduction

This document is a geometrical product specification (GPS) standard and is regarded as a complementary process-specific tolerance standard (see ISO 14638). It influences chain link B of the chain of standards on mouldings.

The ISO GPS matrix model given in ISO 14638 gives an overview of the ISO GPS system, of which this document is a part. The fundamental rules of ISO/GPS given in ISO 8015 apply to this document and the default decision rules given in ISO 14253-1 apply to specifications made in accordance with this document, unless otherwise indicated.

For more detailed information about the relation of this document to other standards and the GPS matrix model; see [Annex F](#).

This document defines a system of tolerance grades, draft angle (taper) grades and machining allowance grades for cast metals and their alloys.

ISO/TS 8062-2 states, in relation to the accumulation method where general dimensional tolerances according to ISO 8062-3 are used, that there is not yet a clearly defined way in the context of the future system of GPS standards to apply the rules for calculating of the final moulded part nominal dimensions from the final machined moulded part nominal dimensions, taking into account the miscellaneous influences.

One of the reasons for this problem is the lack of a proper workpiece datum system.

The general dimensional tolerances apply independently from each other (without a datum system). It is difficult or even impossible to assess what the overall shape of the workpiece can become.

The general dimensional tolerances (\pm tolerances) of ISO 8062-3 apply not only to sizes but also to centre distances and dimensions defining profile contours. This is in contradiction to the GPS rules (e.g. ISO 14405-2).

Furthermore, with 3D CAD, the nominal dimensions are not always visible in the model. As the general dimensional tolerances depend on the nominal dimensions, they cannot be used any more when only the CAD model is available.

For these reasons, the use of ISO 8062-3 from a GPS-point of view cannot be recommended. This document avoids the insufficiencies of ISO 8062-3 described above and is in full compliance with the GPS rules. The general tolerances according to ISO 8062-3 are not comparable with the general tolerances according to this document.

Geometrical product specifications (GPS) — Dimensional and geometrical tolerances for moulded parts —

Part 4: General tolerances for castings using profile tolerancing in a general datum system

1 Scope

This document specifies general geometrical tolerances using surface profile tolerances related to a general datum system that remains on the final part. It also specifies machining allowances and draft angles (tapers) for castings in all cast metals and their alloys produced by various casting manufacturing processes.

NOTE When there is no datum system (target or integral) on surfaces remaining in the final condition, this document cannot be applied.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1101, *Geometrical product specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 1660, *Geometrical product specifications (GPS) — Geometrical tolerancing — Profile tolerancing*

ISO 2692, *Geometrical product specifications (GPS) — Geometrical tolerancing — Maximum material requirement (MMR), least material requirement (LMR) and reciprocity requirement (RPR)*

ISO 5458, *Geometrical Product Specifications (GPS) — Geometrical tolerancing — Positional tolerancing*

ISO 5459, *Geometrical product specifications (GPS) — Geometrical tolerancing — Datums and datum systems*

ISO 8062-1, *Geometrical product specifications (GPS) — Dimensional and geometrical tolerances for moulded parts — Part 1: Vocabulary*

ISO/TS 8062-2, *Geometrical product specifications (GPS) — Dimensional and geometrical tolerances for moulded parts — Part 2: Rules*

ISO 10135, *Geometrical product specifications (GPS) — Drawing indications for moulded parts in technical product documentation (TPD)*

ISO 10579, *Geometrical product specifications (GPS) — Dimensioning and tolerancing — Non-rigid parts*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1101, ISO 1660, ISO 2692, ISO 5458, ISO 5459, ISO 8062-1, ISO/TS 8062-2, ISO 10135, ISO 10579 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 draft angle taper

value of inclination (angle) that is added to a geometrical feature of a pattern or mould to ensure the removal of the pattern or moulded part from the mould

[SOURCE: ISO 8062-1:2007, 2.15, modified]

3.1.1 external draft angle


draft angle (3.1) on a surface that has no opposite surface in the direction outward of the part

Note 1 to entry: See [Figure 1](#).

3.1.2 internal draft angle

draft angle (3.1) on a surface that has an opposite surface in the direction outward of the part

Note 1 to entry: See [Figure 1](#).

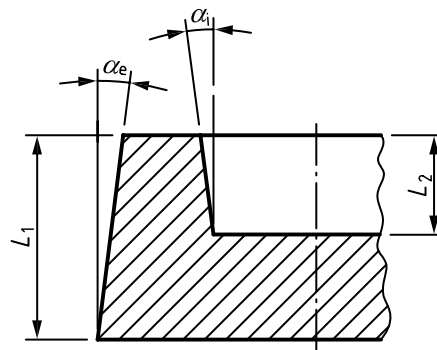

Key

- α_e external draft angle
 α_i internal draft angle

Figure 1 — External and internal draft angles

3.1.3 draft angle increasing the ideal model feature(s)

draft angle (3.1) which is part of the ideal model

Note 1 to entry: See [Figure 3 a](#)).

3.1.4 draft angle increasing the tolerance of feature(s)

draft angle (3.1) which is added to the ideal model and included in the tolerance zone

Note 1 to entry: See [Figure 3 b](#)).

3.2

general datum system RST

datum system according to ISO 5459, using the datum letters R, S, T, locking all degrees of freedom and used for the general tolerance

Note 1 to entry: See [Figure D.2](#).

Note 2 to entry: It is recommended to use a datum target system RST; see [Figure D.1](#).

Note 3 to entry: The datum letters R, S, T, are reserved for the general datum system; see Rule C.

4 Symbols

Symbol	Description		Source
	moulded surface		ISO 1302
	machined surface		
	moulded or machined surface		
	surface profile tolerance		ISO 1101
	positional tolerance		
	theoretically exact dimension		
	datum of datum target		ISO 5459
	datum target, fixed, moveable		
	general tolerance		5.2 , 5.3
	parting surface		ISO 10135
	parting surface	moveable	
		fixed	
	draft angle increasing the ideal model feature(s)		ISO 10135
	draft angle increasing the tolerance of feature(s)		5.8
	moulded condition		ISO/TS 8062-2
	intermediate (pre)machined		
	final machined		
	provided by supplier		

5 Rules

5.1 Rule A: Application of general tolerances for castings

The general tolerances for castings according to this document may be used on drawings showing:

- a) the moulded condition only (see [Figure D.2](#));
- b) the premachined condition and referring to the general tolerances for castings for the features remaining as moulded;
- c) the final machined condition and referring to the general tolerances for the moulded condition (before machining).

Prerequisite is a general datum system RST on surfaces remaining as moulded; see Rule C.

5.2 Rule B: General surface profile tolerances

The general tolerances according to this document are any surface profile tolerances related to a general datum system RST according to ISO 5459; see Rule C. The general tolerance is to be indicated in or near the drawing title block.

The general surface profile tolerance applies to all surfaces with the exception of Rule D.

5.3 Rule C: General datum system

A general datum system RST shall be indicated in the drawing.

When a general datum system RST is used, established by datum targets (preferred method), the general profile tolerances according to [Table 1](#) apply also to the datum features, if not otherwise indicated.


When an integral general datum system RST is used, established by integral features, the general profile tolerances according to [Table 1](#) do not apply to the datum features. In such cases, the datum features shall be tolerated separately by:

- an unrelated profile (form) tolerance for the primary datum;
- a profile tolerance related to the primary datum for the secondary datum;
- a profile tolerance related to the primary and to the secondary datum for the tertiary datum.

NOTE When there is no datum system (target or integral) on surfaces remaining in the final condition, this document cannot be applied.

5.4 Rule D: Tolerances overruling the general surface profile tolerances

Individually indicated surface profile tolerances for location according to ISO 1101 and ISO 1660 and individually indicated positional tolerances according to ISO 5458, each related directly or indirectly to the general datum system RST and locking all degrees of freedom, overrule the general surface profile tolerances. See [Figure 2](#).

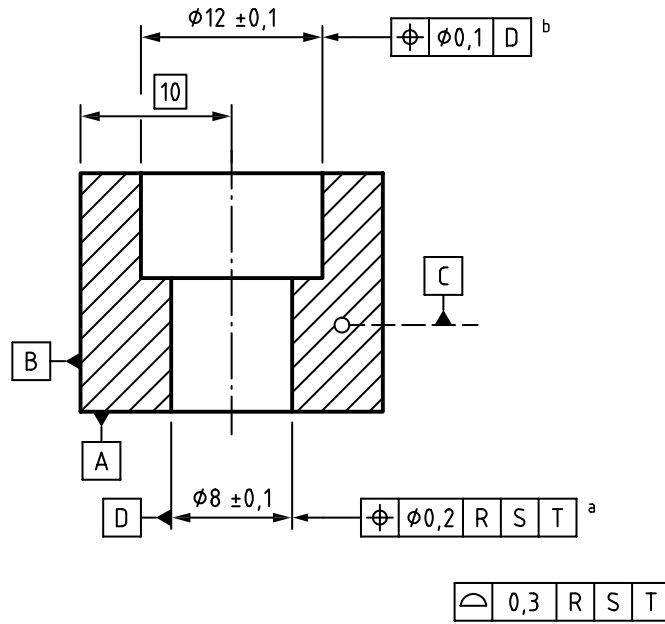

Key

- a Directly related to the general datum system RST.
- b Indirectly related to the general datum system RST.

Figure 2 — Individually indicated locational tolerances overruling the general tolerance

When positional tolerances for sizes are used, the (dimensional) size tolerance shall be specified in addition either by individual indication or by reference to general tolerances.

5.5 Rule E: Additional tolerances

Other tolerances than those described in rules B and D, i.e. not related to the general datum system RST, apply in addition to the general tolerances as further constraints.

5.6 Rule F: Machined condition [application case A c)]

The final machined condition shall be possible to be achieved.

When the tolerances for the machined surfaces are related to a datum or datum system different from the general datum system RST, additional material is needed for the moulded condition.

Due to the inclination and offset of the general datum system RST of the moulded condition relative to the datum system of the machined condition, the amount of additional material shall be calculated from the geometrical tolerance of the datum surfaces of the machined condition relative to the general datum system RST.



5.7 Rule G: Required machining allowances (RMAs)

Surfaces to be machined require a machining allowance RMA. The RMA shall be selected from [Table 3](#) and shall be indicated on the drawing. For information on the selection of RMAs; see [Annex C](#).



The same RMA applies to all surfaces to be machined, unless a different RMA is individually indicated to a specific surface (according to ISO 1302).

[Annex E](#) gives examples for the calculation of the dimension of the moulded condition (raw dimension).

5.8 Rule H: Draft angle (taper)

The parting surface shall be indicated by the symbols  and  in accordance with ISO 10135.

There are three possible ways to indicate a draft angle (taper):

- a) as already included in the ideal model or drawing outlines;
- b) by the symbol ;
- c) by the symbol .

In case a), the general surface profile tolerance zone is located symmetrically to the nominal surface that includes the draft angles (tapers).

In case b), the general surface profile tolerance zone is located symmetrically to the surface when the draft angles (tapers) are added to the nominal model which excludes the draft angles in the tolerance zone; see [Figure 3 a](#)).

In case c), the general surface profile tolerance zone increases steadily as shown in [Figure 3 b](#)).

NOTE The rules for the indication of the symbols are given in ISO 10135.

When the draft angles (tapers) are already included in the nominal model or in the drawing outlines, "Draft angles included" shall be indicated in or near the drawing title block.

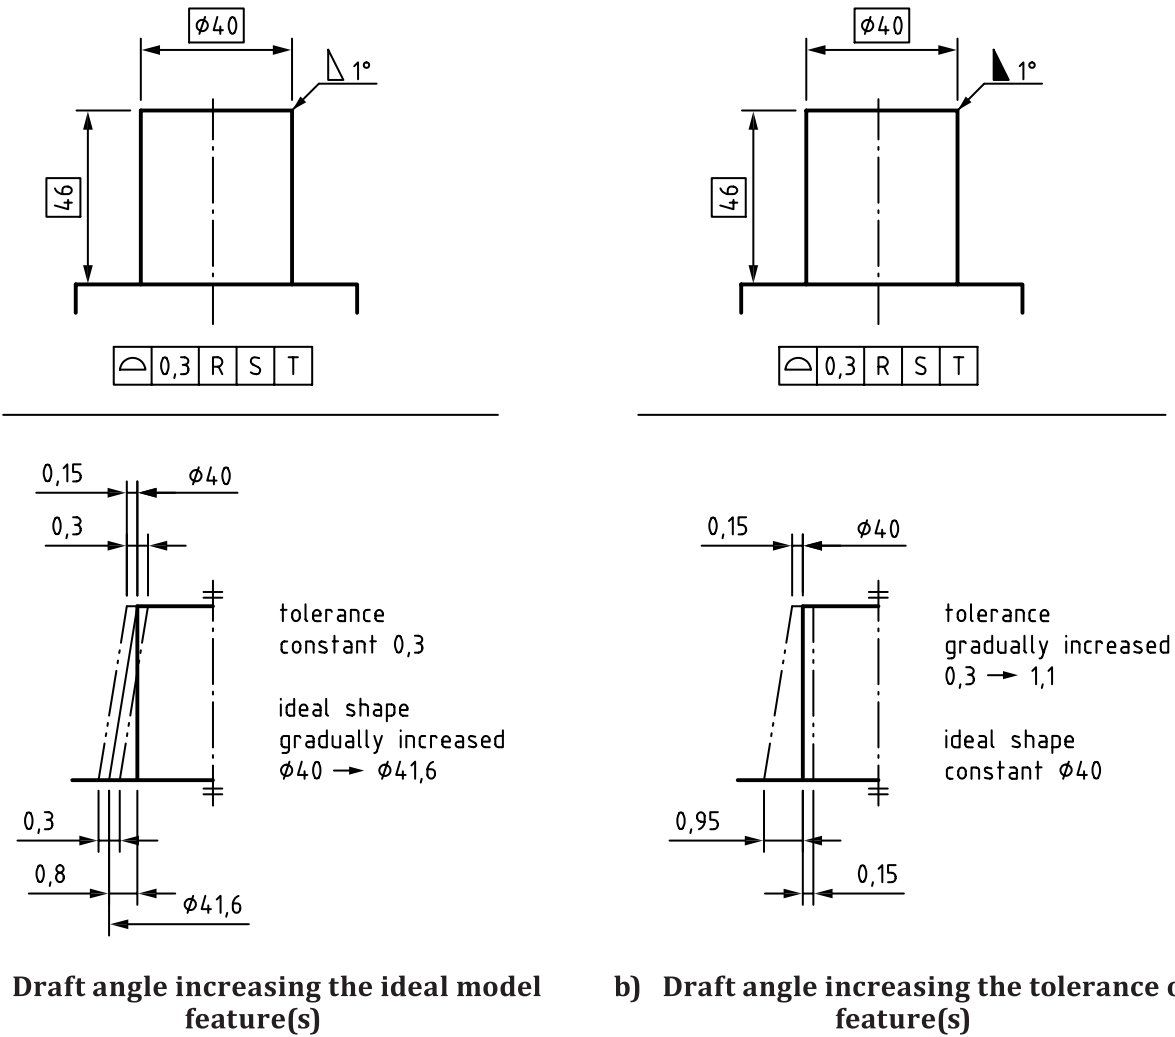


Figure 3 — Draft angles

Unless otherwise indicated, draft angle plus (taper plus) (TP) shall apply. The exception to this rule is for features with the maximum material requirement specified according to ISO 2692, where draft angle minus (taper minus) (TM) shall apply. See ISO 10135.

6 General tolerances

[Table 1](#) gives the general surface profile tolerances for the moulded condition of castings. The tolerances are related to the sizes of the ideal models of the castings (diameter of the smallest enveloping sphere). See [Annex A](#) for more information. The tolerance grades P are related to the material and to the manufacturing method; see [Table B.1](#) and [Table B.2](#).

NOTE This general tolerance is constant throughout the casting.

Table 1 — General surface profile tolerances for the moulded condition of castings

Dimensions in mm

Moulded space diagonal		General surface profile tolerances for tolerance grades P														
above <	up to, including ≤	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
—	10	0,09	0,14	0,19	0,27	0,37	0,53	0,76	1,1	—	—	—	—	—	—	—
10	30	0,12	0,16	0,23	0,31	0,44	0,61	0,86	1,3	—	—	—	—	—	—	—
30	100	0,14	0,19	0,27	0,38	0,53	0,74	1,1	1,5	2,1	3	—	—	—	—	—
100	300	0,15	0,23	0,35	0,5	0,7	0,1	1,4	2	2,8	4	5,6	8	—	—	—
300	1 000	—	—	0,42	0,64	0,8	1,3	1,9	2,7	3,8	5,5	7,5	11	15	19	23
1 000	3 000	—	—	—	—	—	1,6	2,4	3,8	5,4	8	10	15	21	26	33
3 000	6 300	—	—	—	—	—	—	—	—	7	10	13	19	26	33	41
6 300	10 000	—	—	—	—	—	—	—	—	—	11	16	23	32	40	50

The moulded space diagonal is equal to the diameter of the smallest enveloping sphere.

Unless otherwise indicated, surface mismatch is included in the general surface profile tolerance.

For the application of draft angles (tapers); see Rule H.

For sizes (diameters) of complete cylinders, as a further restriction (see Rule E), the values given in [Table 2](#) apply as dimensional tolerances. Unless otherwise specified, ± of half the values of [Table 2](#) apply.

If the values for the general tolerances of [Table 2](#) are not required, the drawing indication for the general tolerance shall only refer to the tolerance grade P.

NOTE 1 The tolerance values for sizes are related to the nominal values of the sizes in the moulded condition.

For wall thicknesses, as a further constraint (see Rule E), the values given in [Table 2](#) apply as dimensional tolerances. Unless otherwise specified, ± of half the values apply. Unless otherwise specified, one grade coarser than for sizes shall apply.

If draft angles are involved, the ± tolerance for the wall thickness shall be large enough to include the draft angles. If necessary, individual ± tolerances shall be indicated.

NOTE 2 The tolerance values for wall thickness are related to the nominal values of the wall thickness in the moulded condition.

Table 2 — General dimensional tolerances for sizes (diameters) of complete cylinders, and for wall thicknesses

Dimensions in mm

Casting size ^a		General dimensional tolerances for tolerance grades S														
above <	up to, including ≤	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
—	10	0,05	0,06	0,1	0,12	0,17	0,25	0,35	0,5	0,7	1	1,4	2	—	—	—
10	30	0,06	0,07	0,12	0,15	0,2	0,3	0,4	0,6	0,8	1,2	1,7	2,5	3	4	5
30	100	0,07	0,1	0,14	0,2	0,25	0,4	0,5	0,8	1	1,5	2	3	4	5	7
100	300	0,08	0,12	0,17	0,25	0,35	0,5	0,7	1	1,4	2	3	4	5	7	9

^a Size or wall thickness of the nominal contour in the moulded condition.

If for functional reasons features of size established by two parallel opposite planes are required, the feature of size tolerances shall be indicated individually.

There are cases where the calculation of the moulded dimension using tolerances according to [Table 1](#) or [Table 2](#) leads to two different results (a larger and a smaller dimensional tolerance). In such cases, the smaller dimensional tolerance applies.

7 Required machining allowances

The RMAs are given in [Table 3](#). The RMA grades are related to the material and to the manufacturing method; see [Table C.1](#).

Table 3 — Required machining allowance grades

Dimensions in mm

Moulded space diagonal		RMA grades									
above <	up to, including ≤	A	B	C	D	E	F	G	H	J	K
—	40	0,1	0,1	0,2	0,3	0,4	0,5	0,5	0,7	1	2
40	63	0,1	0,2	0,3	0,3	0,4	0,5	0,7	1	1,4	3
63	100	0,2	0,3	0,4	0,5	0,7	1	1,4	2	2,8	4
100	160	0,3	0,4	0,5	0,8	1,1	1,5	2,2	3	4	6
160	250	0,3	0,5	0,7	1	1,4	2	2,8	4	5,5	8
250	400	0,4	0,7	0,9	1,3	1,8	2,5	3,5	5	7	10
400	630	0,5	0,8	1,1	1,5	2,2	3	4	6	9	12
630	1 000	0,6	0,9	1,2	1,8	2,5	3,5	5	7	10	14
1 000	1 600	0,7	1	1,4	2	2,8	4	5,5	8	11	16
1 600	3 000	0,8	1,1	1,6	2,2	3,2	4,5	6	9	13	18
3 000	6 300	1	1,4	2	2,8	4	5,5	8	11	16	22
6 300	10 000	1,1	1,5	2,2	3	4,5	6	9	12	17	24

NOTE The number of moulded space diagonal graduations is greater than in [Table 1](#) and [Table 2](#), in order to avoid excess material.

8 Draft angles (tapers)

If indicated in the general drawing indication (see [Clause 9](#)) and if not otherwise individually indicated, the draft angles (tapers) according to [Table 4](#) to [Table 8](#) apply.

The rules for the indication of draft angles (tapers) are given in ISO 10135. The draft angle (taper) applies as continuously increasing the tolerance (not increasing the ideal model); see Rule H c).

In order to identify the draft angled (tapered) surfaces, the parting surface is to be indicated according to ISO 10135.

Table 4 — Draft angles (tapers) for hand moulding casting

Height range of feature for draft angle mm		Grade A (DA) (fine)		Grade B (DB) (coarse)	
above <	up to, including ≤	External	Internal	External	Internal
0	4	6,9° (0,4 mm)	8,3° (0,5 mm)	8,8° (0,6 mm)	10,7° (0,7 mm)
4	6,3	6,5° (0,6 mm)	7,5° (0,7 mm)	5,2° (0,7 mm)	9,3° (0,8 mm)
6,3	10	4,8° (0,7 mm)	5,4° (0,8 mm)	5,7° (0,8 mm)	7,5° (1,0 mm)
10	16	3,2° (0,7 mm)	4,1° (0,9 mm)	4,7° (1,0 mm)	5,7° (1,3 mm)
16	25	2,6° (0,9 mm)	3,0° (1,1 mm)	3,2° (1,1 mm)	4,4° (1,6 mm)
25	40	2,2° (1,1 mm)	2,9° (1,6 mm)	3,0° (1,5 mm)	4,1° (2,2 mm)
40	63	1,9° (1,5 mm)	2,4° (2,1 mm)	2,6° (2,1 mm)	3,3° (2,8 mm)
63	100	1,4° (1,8 mm)	2,0° (2,6 mm)	2,0° (2,4 mm)	2,7° (3,6 mm)
100	160	1,0° (2,2 mm)	1,5° (3,2 mm)	1,4° (3,0 mm)	2,0° (4,3 mm)
160	250	0,8° (2,8 mm)	1,2° (4,0 mm)	1,2° (4,0 mm)	1,6° (5,5 mm)
250	400	0,7° (3,1 mm)	0,9° (5,0 mm)	0,9° (4,5 mm)	1,3° (6,8 mm)
400	630	0,5° (4,7 mm)	0,8° (6,5 mm)	0,7° (6,3 mm)	1,0° (8,7 mm)
630	1 000	0,5° (7,0 mm)	0,7° (9,0 mm)	0,7° (9,5 mm)	0,9° (12,5 mm)
1 000	1 600	0,4° (9,0 mm)	0,5° (11,5 mm)	0,5° (11,5 mm)	0,7° (14,5 mm)

Table 5 — Draft angles (tapers) for machine moulding casting

Height range of feature for draft angle mm		Grade A (DA) (fine)		Grade B (DB) (coarse)	
above <	up to, including ≤	External	Internal	External	Internal
0	4	5,8° (0,4 mm)	6,8° (0,5 mm)	7,4° (0,5 mm)	8,6° (0,6 mm)
4	6,3	5,3° (0,5 mm)	6,0° (0,5 mm)	6,7° (0,6 mm)	7,5° (0,7 mm)
6,3	10	3,9° (0,5 mm)	4,4° (0,6 mm)	4,7° (0,7 mm)	6,0° (0,8 mm)
10	16	2,7° (0,6 mm)	3,2° (0,7 mm)	3,9° (0,9 mm)	4,5° (1,0 mm)
16	25	2,2° (0,8 mm)	2,5° (0,9 mm)	2,8° (1,0 mm)	3,5° (1,2 mm)
25	40	2,0° (1,1 mm)	2,4° (1,3 mm)	2,7° (1,5 mm)	3,3° (1,8 mm)
40	63	1,6° (1,4 mm)	1,9° (1,7 mm)	2,0° (1,8 mm)	2,6° (2,2 mm)
63	100	1,2° (1,7 mm)	1,6° (2,1 mm)	1,6° (2,2 mm)	2,2° (3,0 mm)
100	160	1,0° (2,3 mm)	1,3° (2,8 mm)	1,3° (2,9 mm)	1,8° (3,9 mm)
160	250	0,9° (3,0 mm)	1,1° (3,9 mm)	1,2° (4,1 mm)	1,6° (5,4 mm)
250	400	0,8° (4,3 mm)	1,0° (5,4 mm)	1,1° (5,8 mm)	1,4° (7,4 mm)

Table 5 (continued)

Height range of feature for draft angle mm		Grade A (DA) (fine)		Grade B (DB) (coarse)	
above <	up to, including ≤	External	Internal	External	Internal
400	630	0,7° (6,2 mm)	0,9° (7,7 mm)	0,9° (7,9 mm)	1,1° (9,8 mm)
630	1 000	0,5° (7,0 mm)	0,7° (9,0 mm)	0,7° (9,5 mm)	0,9° (12,5 mm)
1 000	1 600	0,4° (9,0 mm)	0,5° (11,5 mm)	0,5° (11,5 mm)	0,7° (14,5 mm)

Table 6 — Draft angles (tapers) for permanent moulding casting

Height range of feature for draft angle mm		Grade A (DA) (fine)		Grade B (DB) (coarse)	
above <	up to, including ≤	External draft angle	Internal draft angle	External draft angle 2	Internal draft angle 2
—	4	8,5° (0,3 mm)	11,3° (0,4 mm)	11,3° (0,4 mm)	11,3° (0,4 mm)
4	6,3	3,3° (0,3 mm)	5,6° (0,5 mm)	5,6° (0,5 mm)	5,6° (0,5 mm)
6,3	10	3,5° (0,5 mm)	4,9° (0,7 mm)	4,9° (0,7 mm)	5,6° (0,8 mm)
10	16	3,1° (0,7 mm)	1,4° (1,0 mm)	3,5° (0,8 mm)	5,3° (1,2 mm)
16	25	2,8° (1,0 mm)	3,9° (1,4 mm)	3,4° (1,2 mm)	4,5° (1,6 mm)
25	40	2,5° (1,4 mm)	3,5° (2,0 mm)	3,2° (1,8 mm)	4,1° (2,3 mm)
40	63	2,2° (2,0 mm)	2,8° (2,5 mm)	2,8° (2,5 mm)	3,6° (3,2 mm)
63	100	1,8° (2,5 mm)	2,8° (4,0 mm)	2,5° (3,6 mm)	3,2° (4,5 mm)
100	160	1,8° (4,0 mm)	2,2° (5,0 mm)	1,6° (5,0 mm)	2,6° (6,0 mm)
160	250	1,7° (6,0 mm)	1,8° (6,5 mm)	2,0° (7,0 mm)	2,2° (8,0 mm)
250	400	1,4° (8,0 mm)	1,6° (9,0 mm)	1,6° (9,0 mm)	1,8° (10,0 mm)
400	630	1,2° (11,0 mm)	1,3° (12,0 mm)	1,3° (12,0 mm)	1,5° (13,0 mm)

Table 7 — Draft angles (tapers) for pressure die casting

Height range of feature for draft angle mm		Grade A (DA) (fine)		Grade B (DB) (coarse)	
above <	up to, including ≤	External draft angle	Internal draft angle	External draft angle 2	Internal draft angle 2
—	4	5,7° (0,2 mm)	8,5° (0,3 mm)	8,5° (0,3 mm)	11,3° (0,4 mm)
4	6,3	2,2° (0,2 mm)	3,3° (0,3 mm)	3,3° (0,3 mm)	5,6° (0,5 mm)
6,3	10	2,1° (0,3 mm)	2,8° (0,4 mm)	2,8° (0,4 mm)	4,9° (0,7 mm)
10	16	1,3° (0,3 mm)	2,2° (0,5 mm)	2,2° (0,5 mm)	4,0° (0,9 mm)
16	25	2,8° (0,4 mm)	2,0° (0,7 mm)	2,0° (0,7 mm)	3,4° (1,2 mm)
25	40	2,5° (0,7 mm)	2,1° (1,2 mm)	2,1° (1,2 mm)	3,5° (2,0 mm)
40	63	2,2° (1,0 mm)	1,7° (1,5 mm)	1,7° (1,5 mm)	2,8° (2,5 mm)
63	100	0,8° (1,2 mm)	1,4° (2,0 mm)	1,4° (2,0 mm)	2,5° (3,5 mm)
100	160	0,9° (2,0 mm)	1,3° (3,0 mm)	1,3° (3,0 mm)	2,2° (5,0 mm)
160	250	0,7° (2,5 mm)	1,1° (4,0 mm)	1,1° (4,0 mm)	2,0° (7,0 mm)
250	400	0,5° (3,0 mm)	0,9° (5,5 mm)	0,9° (5,5 mm)	1,6° (9,0 mm)
400	630	0,5° (4,0 mm)	0,8° (7,0 mm)	0,8° (7,0 mm)	1,2° (11,0 mm)

Table 8 — Draft angles (tapers) for investment casting

Height range of feature for draft angle mm		Grade A (DA) (fine)		Grade B (DB) (coarse)	
above<	up to, including≤	External draft angle	Internal draft angle	External draft angle 2	Internal draft angle 2
—	4	5,7° (0,2 mm)	5,7° (0,2 mm)	5,7° (0,2 mm)	8,5° (0,3 mm)
4	6,3	2,2° (0,2 mm)	2,2° (0,2 mm)	2,2° (0,2 mm)	3,3° (0,3 mm)
6,3	10	1,4° (0,2 mm)	1,4° (0,2 mm)	1,4° (0,2 mm)	2,8° (0,4 mm)
10	16	0,9° (0,2 mm)	1,3° (0,3 mm)	1,3° (0,3 mm)	1,8° (0,4 mm)
16	25	0,8° (0,3 mm)	1,1° (0,4 mm)	1,1° (0,4 mm)	1,4° (0,5 mm)
25	40	0,5° (0,3 mm)	0,7° (0,4 mm)	0,7° (0,4 mm)	1,1° (0,6 mm)
40	63	0,5° (0,4 mm)	0,6° (0,5 mm)	0,6° (0,5 mm)	0,8° (0,7 mm)
63	100	0,3° (0,4 mm)	0,4° (0,6 mm)	0,4° (0,6 mm)	0,6° (0,8 mm)
100	160	0,2° (0,5 mm)	0,3° (0,7 mm)	0,3° (0,7 mm)	0,4° (0,9 mm)
160	250	0,2° (0,6 mm)	0,2° (0,8 mm)	0,2° (0,8 mm)	0,3° (1,0 mm)
250	400	0,1° (0,7 mm)	0,2° (0,9 mm)	0,2° (0,9 mm)	0,2° (1,2 mm)
400	630	0,1° (0,8 mm)	0,1° (1,0 mm)	0,1° (1,0 mm)	0,2° (1,5 mm)


NOTE The overall dimension rating is finer than that in [Table 4](#) to [Table 8](#), in order to avoid excess material.

9 General drawing indication

In order to apply the general tolerances according to this document, the following items shall be specified in, or near to, the drawing title block:

- the number of this document, i.e. ISO 8062-4;
- the general profile tolerance and the indication of the datum system;
- the general tolerance grade for sizes of cylinders, if required;
- the general tolerance grade for wall thicknesses;
- the RMA value;
- the manufacturing method, together with the draft angle (taper) grade;
- the draft angles included in the ideal model (if draft angles are included in the ideal model);
- the casting size, $S\emptyset$, of the smallest enveloping sphere;
- the part condition identifier(s) (see ISO/TS 8062-2).

For example: ISO 8062-4

 2,7 R S T (P8)

Cylinder diameters S8

Wall thicknesses S9

RMA 2,5

Machine moulding DB

Draft angles included in the nominal model

Casting size SØ 880

Annex A **(informative)**

Concept of general tolerancing

General tolerances according to this document are surface profile tolerances related to a general datum system RST. If a datum target system is used, it is established by six datum targets for rigid workpieces and by a minimum of six datum targets for flexible workpieces. The datum targets are indicated in the drawing.

The general tolerances on surface profile apply in principle to all surfaces of the workpiece, with the exception of datum features when a datum system established by integral features is used.

In special cases, larger or smaller surface profile tolerances related to the general datum system may be individually indicated for particular surfaces. Individually indicated tolerances, directly or indirectly related to the general datum system, override the general tolerances. See [Figure 2](#).

For sizes, general positional tolerances related to the general datum system RST may be specified, overruling the general surface profile tolerances.

Other individually indicated tolerances are complementary, i.e. they apply in addition as a further constraint to the general tolerances.


Dimensional tolerances (\pm tolerances) should only be used when necessary and only for diameters and widths (sizes) together with positional tolerances, and for wall thicknesses.

In order to achieve the full economic success, the general tolerances are to be respected without special effort and with a high probability. The corresponding amount of the general tolerances shall be derived from measurements on workpieces out of the normal production; see [Figure A.1](#).

According to this investigation, the general tolerances are to be selected from the tables.

The use of general tolerances enables drawings to be more easily understood because fewer individual tolerances are required. Additionally, where individual tolerances requiring special attention are indicated, these can easily be identified during the manufacturing and inspection process, thus enabling more economic production.

The foundry should determine by measurements what its customary foundry accuracy is and accept only those drawings which have general tolerances equal to or larger than its customary foundry accuracy.

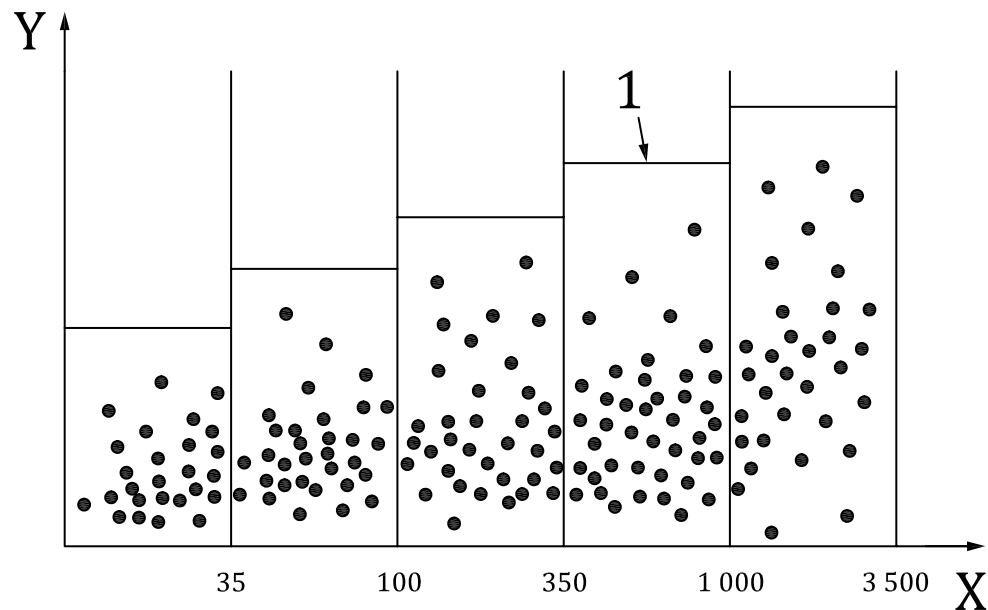

Key

- 1 general profile deviation limit (L)
- X workpiece overall size (smallest enveloping sphere diameter)
- Y max. profile deviation of workpiece (measured)

Figure A.1 — General tolerances derived from measurements

Unless otherwise stated, workpieces exceeding the general tolerances shall not lead to automatic rejection, provided that the ability of the workpiece to function is not impaired.

The design authority should be consulted to agree suitability of the non-conformance.

Annex B (informative)

Selection of general tolerances

See [Table B.1](#) and [Table B.2](#).

Table B.1 — Tolerance grades P and S for general tolerances for long-series or mass production of castings

	Sand cast hand moulding	Sand cast machine mould and shell moulding	Metallic permanent mould	Pressure die casting	Investment casting
Steel	11-14	8-12	—	—	4-9
Grey iron	11-14	8-12	7-9	—	4-9
S. G. iron	11-14	8-12	7-9	—	4-9
Malleable iron	11-14	8-12	7-9	—	4-9
Copper alloys	10-13	8-10	7-9	6-8	4-9
Zinc alloys	10-13	8-10	7-9	3-6	4-9
Light metal alloys	9-12	7-9	6-8	6-9	4-9
Nickel based alloys	11-14	8-12	—	—	4-9
Cobalt based alloys	11-14	8-12	—	—	4-9

Table B.2 — Tolerance grades P and S for general tolerances for short-series or single production of castings

	Sand cast hand moulding	
	Clay-bonded	Chemically bonded
Steel	13-14	12-14
Grey iron	13-15	11-14
S. G. iron	13-15	11-14
Malleable iron	13-15	11-14
Copper alloys	13-15	10-13
Light metal alloys	11-13	10-13
Nickel based alloys	13-15	12-14
Cobalt based alloys	13-15	12-14

Annex C (informative)

Selection of required machining allowances (RMAs)

See [Table C.1](#).

Table C.1 — RMA grades

	Sand cast hand moulding	Sand cast machine mould and shell moulding	Metallic per- manent mould	Pressure die casting	Investment casting
Steel	G to K	F to H	—	—	E
Grey iron	F to H	E to G	D to F	—	E
S. G. iron	F to H	E to G	D to F	—	E
Malleable iron	F to H	E to G	D to F	—	—
Copper alloys	F to H	E to G	D to F	B to D	E
Zinc alloys	F to H	E to G	D to F	A to D	—
Light metal alloys	F to H	E to G	D to F	B to D	E
Nickel based alloys	G to K	F to H	—	—	E
Cobalt based alloys	G to K	F to H	—	—	—

Annex D (informative)

Example of using general tolerances

See [Figure D.1](#) and [Figure D.2](#).



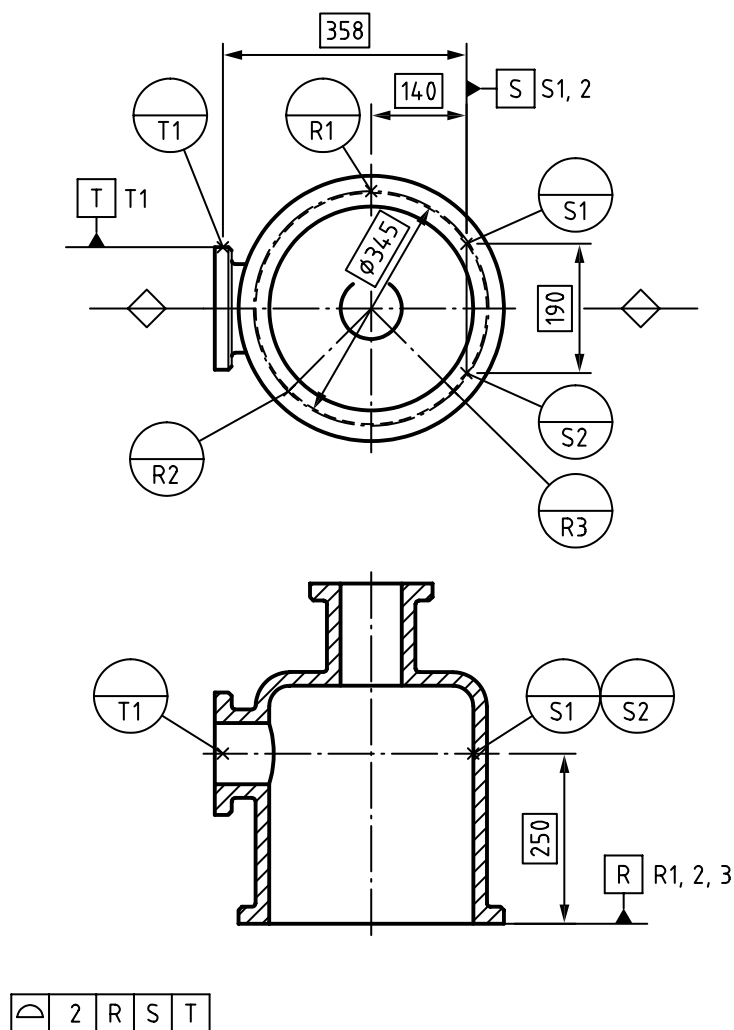


Figure D.1 — Datum target system and parting surface, example

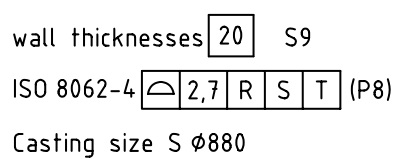

Casting size S $\phi 880$

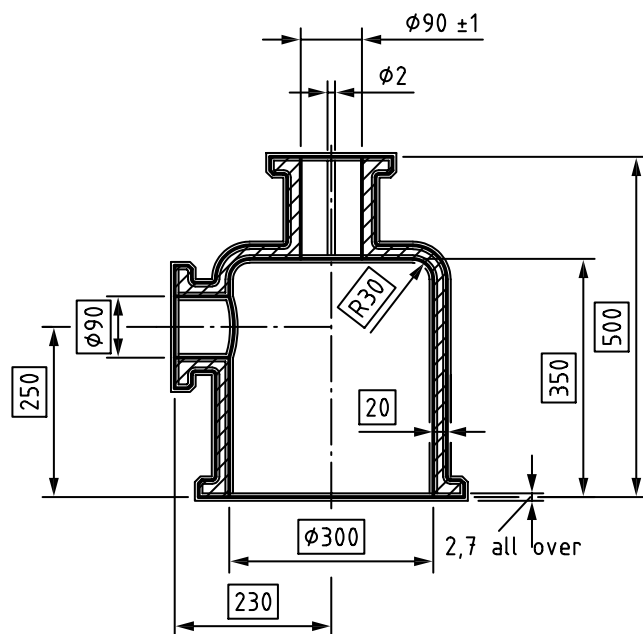

Exceptions from 2,7 all over:

top surface

\bigcap	4	R
-----------	---	---

left surface

\bigcap	1	R	S	T
-----------	---	---	---	---

top hole $\varnothing 90 \pm 1$

\varnothing	$\varnothing 2$	R	S
---------------	-----------------	---	---

Additional restriction:

left hole

\bigcap	1
-----------	---

wall thicknesses $20 \pm 0,4$

b) Interpretation

NOTE See also [Figure D.1](#).

Figure D.2 — Use of general tolerances with exceptions and additional further constraints

General dimensional tolerances for cylindrical sizes are not required. Regarding parting surface and draft angles (tapers), the drawing is not complete; see [Figure D.1](#) instead. As there occurs only one wall thickness in the drawing, the TED has been indicated in general.

Annex E (informative)

Calculation of the nominal dimension of the moulded condition

See [Figures E1](#), [E.2](#) and [E.3](#).

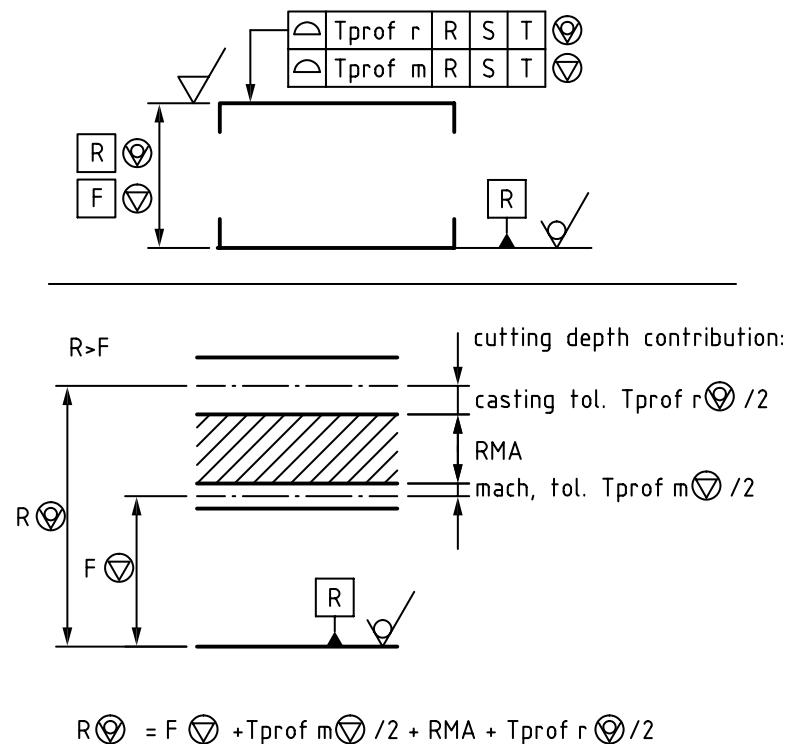


Figure E.1 — Calculation of nominal dimension of moulded condition, plane

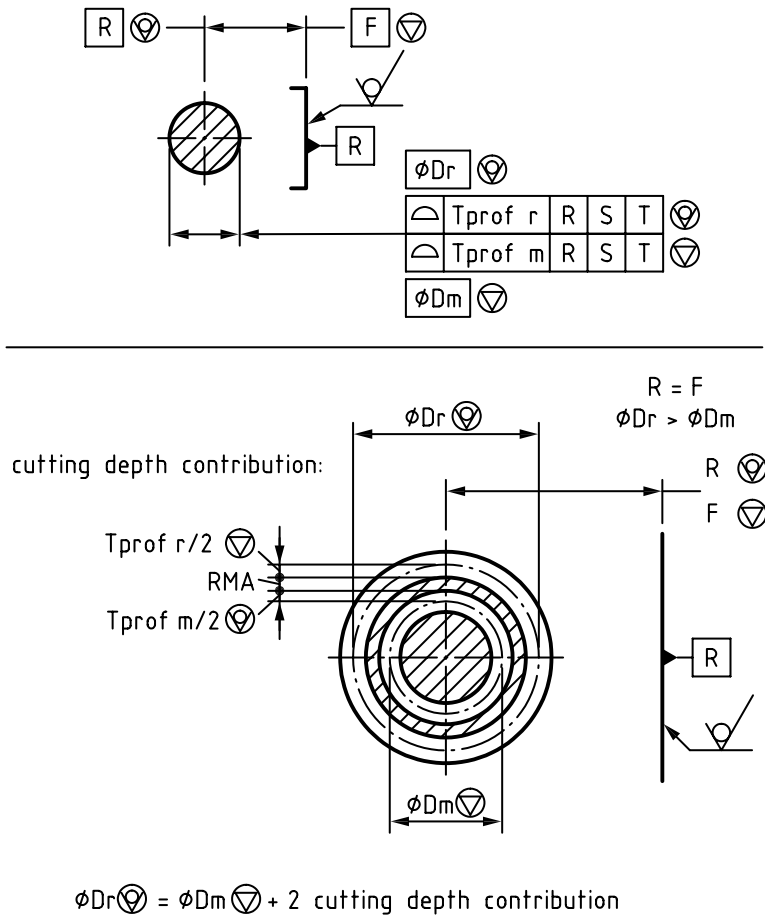


Figure E.2 — Calculation of nominal dimension of moulded condition, shaft, profile tolerance for machined condition

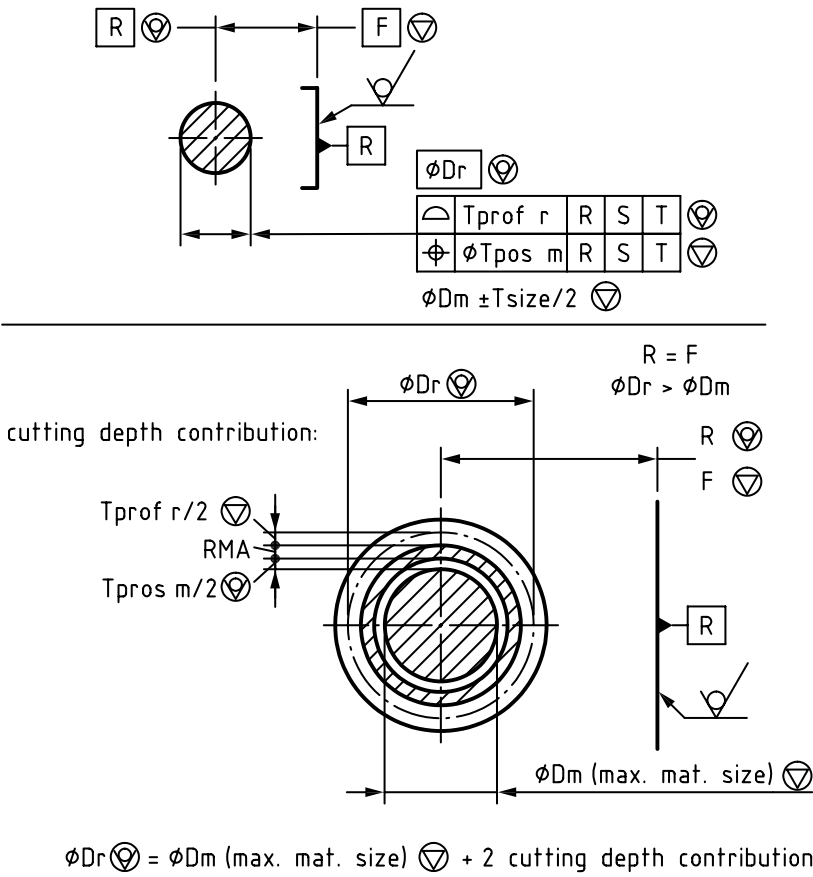


Figure E.3 — Calculation of nominal dimension of moulded condition, shaft, size and positional tolerance for machined condition

Annex F (informative)

Relation to the GPS matrix model

F.1 General

The ISO GPS matrix model given in ISO 14638 gives an overview of the ISO GPS system, of which this document is a part.

F.2 Information about the standard and its use

This document specifies a system of general dimensional (for cylinders and wall thicknesses) and geometrical tolerances, as well as machining allowance grades, for castings as delivered to the purchaser. It is applicable for the tolerancing of dimensions and geometry of castings in all cast metals and their alloys produced by various casting manufacturing processes.

F.3 Position in the GPS matrix model

This document is a geometrical product specification (GPS) standard and shall be regarded as a complementary process specific tolerance GPS standard (see ISO 14638). It influences link B of the chain of standards on castings, as illustrated in [Table F.1](#) which is indicated with a filled dot (●).

Table F.1 — Position in the complementary ISO GPS matrix model

	Chain links						
	A	B	C	D	E	F	G
	Symbols and indications	Feature requirements	Feature properties	Conformance and non-conformance	Measurement	Measurement equipment	Calibrations
Size							
Distance							
Form		●					
Orientation		●					
Location		●					
Run-out							
Profile surface texture							
Areal surface texture							
Surface imperfections							

Bibliography

- [1] ISO 1302, *Geometrical Product Specifications (GPS) — Indication of surface texture in technical product documentation*
- [2] ISO 8015, *Geometrical product specifications (GPS) — Fundamentals — Concepts, principles and rules*
- [3] ISO 8062-3, *Geometrical product specifications (GPS) — Dimensional and geometrical tolerances for moulded parts — Part 3: General dimensional and geometrical tolerances and machining allowances for castings*
- [4] ISO 14253-1, *Geometrical product specifications (GPS) — Inspection by measurement of workpieces and measuring equipment — Part 1: Decision rules for proving conformity or nonconformity with specifications*
- [5] ISO 14405-2, *Geometrical product specifications (GPS) — Dimensional tolerancing — Part 2: Dimensions other than linear sizes*
- [6] ISO 14638, *Geometrical product specifications (GPS) — Matrix model*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK