



HP Pavilion dv7 Notebook PC

Maintenance and Service Guide

© Copyright 2011 Hewlett-Packard
Development Company, L.P.

AMD, the AMD Arrow logo, Athlon, Phenom, Sempron, Turion, and combinations thereof, are trademarks of Advanced Micro Devices, Inc. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. Intel, Celeron, Core, and Pentium are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. SD Logo is a trademark of its proprietor.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

First Edition: January 2011

Document Part Number: 635468-002

Safety warning notice


 **WARNING!** To reduce the possibility of heat-related injuries or of overheating the device, do not place the device directly on your lap or obstruct the device air vents. Use the device only on a hard, flat surface. Do not allow another hard surface, such as an adjoining optional printer, or a soft surface, such as pillows or rugs or clothing, to block airflow. Also, do not allow the AC adapter to contact the skin or a soft surface, such as pillows or rugs or clothing, during operation. The device and the AC adapter comply with the user-accessible surface temperature limits defined by the International Standard for Safety of Information Technology Equipment (IEC 60950).

Table of contents

1 Product description	1
2 External component identification	9
Top	10
Buttons	10
Keys	11
Lights	13
TouchPad	14
Display	15
Front	16
Left side	17
Right side	18
Bottom	19
3 Illustrated parts catalog	20
Service tag	21
Computer major components	22
Display assembly subcomponents	29
Mass storage devices	30
Miscellaneous parts	31
Sequential part number listing	32
4 Removal and replacement procedures	39
Preliminary replacement requirements	39
Tools required	39
Service considerations	39
Plastic parts	39
Cables and connectors	39
Drive handling	40
Grounding guidelines	40
Electrostatic discharge damage	40

Packaging and transporting guidelines	42
Component replacement procedures	44
Service tag	44
Computer feet	45
Battery	45
Optical drive	46
Hard drive	49
RTC battery	52
Memory module	53
WLAN module	54
Keyboard	56
Top cover	60
Fingerprint reader board	64
Power button board	66
Display lid switch board	68
SD Card reader board	70
Bluetooth module	72
USB board	74
Front speakers	76
Power connector cable	78
System board	79
Fan/heat sink assembly	82
Processor	86
Optical drive cable	90
Rear speakers	91
Subwoofer	93
Display assembly	94
5 Setup Utility (BIOS) and System Diagnostics	102
Using Setup Utility	102
Starting Setup Utility	102
Changing the language of Setup Utility	102
Navigating and selecting in Setup Utility	103
Displaying system information	103
Restoring factory settings in Setup Utility	104
Exiting Setup Utility	104
Updating the BIOS	104
Determining the BIOS version	105
Downloading a BIOS update	105
Using System Diagnostics	106

6 Specifications	107
Device specifications	107
17.3-inch display specifications	108
Hard drive specifications	109
7 Backup and recovery	110
Restore	110
Creating restore media	111
Performing a system restore	112
Restoring using the dedicated recovery partition (select models only)	112
Restoring using the restore media	113
Changing the computer boot order	113
Backing up and recovering your information	114
Using Windows Backup and Restore	115
Using Windows system restore points	115
When to create restore points	115
Create a system restore point	116
Restore to a previous date and time	116
8 Power cord set requirements	117
Requirements for all countries	117
Requirements for specific countries and regions	118
9 Recycling	119
Battery	119
Display	119
Index	125

1 Product description

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
Product Name	HP Pavilion dv7 Notebook PC	√	√
Processors	AMD Athlon II N370 2.50-GHz processor (1.0-MB L2 cache, 1066-MHz FSB, 3.2-GT/second, Dual Core, 35W)	√	
	AMD Athlon II P340 2.20-GHz processor (1.0-MB L2 cache, 1066-MHz FSB, 3.2-GT/second, Dual Core, 25W)	√	
	AMD Athlon II P360 2.30-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 25W)	√	
	AMD Phenom II N850 2.20-GHz processor (1.5-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Triple Core, 35W)	√	
	AMD Phenom II P960 1.80-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Quad Core, 25W)	√	
	AMD Phenom II P860 2.00-GHz processor (1.5-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Triple Core, 25W)	√	
	AMD Phenom II P650 2.60-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Dual Core, 25W)	√	
	AMD Phenom II N660 3.00-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Dual Core 35W)	√	
	AMD Phenom II N870 2.30-GHz processor (1.5-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Triple Core, 35W)	√	
	AMD Phenom II N970 2.20-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Quad Core, 35W)	√	

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
	AMD Turion II N570 2.70-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 35W)	√	
	AMD Turion II N560 2.50-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 35W)	√	
	Intel Quad Core i7-2820QM 2.30-GHz (turbo up to 3.10-GHz) processor (1600-MHz FSB, 8-MB L3 cache, 45W)		√
	Intel Quad Core i7-2720QM 2.20-GHz (turbo up to 3.00-GHz) processor (1600-MHz FSB, 6-MB L3 cache, 45W)		√
	Intel Quad Core i7-2630QM 2.00-GHz (turbo up to 2.90-GHz) processor (1600-MHz FSB, 6-MB L3 cache, 45W)		√
	Intel Dual Core i7-2620M 2.70-GHz (turbo up to 3.40-GHz) processor (1333-MHz FSB, 4-MB L3 cache, 35W)		√
	Intel Dual Core i5-2540M 2.60-GHz (turbo up to 3.30-GHz) processor (1333-MHz FSB, 3-MB L3 cache, 35W)		√
	Intel Dual Core i5-2520M 2.50-GHz (turbo up to 3.20-GHz) processor (1333-MHz FSB, 3-MB L3 cache, 35W)		√
	Intel Dual Core i5-2410M 2.30-GHz (turbo up to 2.90-GHz) processor (3-MB L3 cache, 35W)		√
	Intel Dual Core i3-2310M 2.10-GHz processor (3-MB L3 cache, 35W)		√
Chipset	ATI RS880M - AMD M880G with ATI Mobility Radeon HD 4250	√	
	Northbridge: AMD RS880MD		
	Southbridge: AMD SB820M		
	Intel® HM65 Express chipset		√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
Graphics	Internal graphics: ATI Mobility Radeon™ HD 4250 graphics with 128-MB sideport memory (64-MB×16 DDR3 800 @ 900 MHz)	√	
	Switchable discrete graphics: <ul style="list-style-type: none"> AMD Pro (AMD Radeon HD 6650M) with 1024-MB of discrete video memory (64-MB×16 DDR3 800 @ 900 MHz × 8 PCs); 128-bit M2 package muxless switchable ATi XT with 512-MB of discrete video memory (64-MB×16 DDR3 800 @ 900 MHz × 4 PCs); 64-bit M2 package muxless switchable 		
	Internal graphics: Intel HD graphics		√
	Switchable discrete graphics: <ul style="list-style-type: none"> ATI XT Radeon HD 6770M M2 package with 1024-MB of discrete video memory (32-MB × 32 GDDR5 × 8 PCs, 5 Gbps); muxless, reserve space for 2 GB VRAM ATI XT Radeon HD 6490M M2 package with 1024-MB of discrete video memory (64-MB × 32 GDDR5 × 4 PCs, 5Gbps); maximum 1 GB VRAM, muxless 		
	Support HD decode, DX11, and HDMI		√
Panel	17.3-in, high-definition+ (HD+), light-emitting diode (LED), SVA BrightView (1600×900) display; typical brightness: 200 nits All display assemblies include 2 wireless local area network (WLAN) antenna cables Supports 16:9 ultra wide aspect ratio Supports low-voltage differential signalling (LVDS) Lighted logo on top bezel	√	√
Memory	2 customer-accessible/upgradable memory module slots	√	√
	Supports dual-channel memory	√	√
	Supports up to 8192 GB of system RAM	√	√
	DDR3/1333-MHz	√	√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
	Supports the following configurations: <ul style="list-style-type: none"> 8192-MB total system memory (4096×2) 6144-MB total system memory (4096×1 + 2048×1) 4096-MB total system memory (4096×1 or 2048×2) 3072-MB total system memory (2048×1 + 1024×1) 2048-MB total system memory (2048×1 or 1024×2) 	√	√
Hard drives	Supports 6.35-cm (2.5-in) hard drives in 12.7-mm (.50-in), 9.5-mm (.37-in), and 7.0-mm (.28-in) thicknesses	√	√
	Customer-accessible	√	√
	Accelerometer hard drive protection support	√	√
	Supports up to 2 hard drives	√	√
	Supports 160-GB solid-state drive (solid-state drive)		√
	Serial ATA	√	√
	Supports 500 GB, 7200 rpm, 9.5 mm hard drive + 160 GB solid-state drive combination		√
	Supports the following double hard drive configurations: <ul style="list-style-type: none"> 2 TB (1 TB, 5400 rpm, 12.7 mm × 2) 1500 GB (750 GB, 7200 rpm, 9.5 mm × 2) 1500 GB (750 GB, 5400 rpm, 9.5 mm × 2) 		
	Supports the following double hard drive configurations: <ul style="list-style-type: none"> 1 TB, 5400 rpm, 12.7 mm 750 GB, 7200 and 5400 rpm, 9.5 mm 640 GB, 7200 and 5400 rpm, 9.5 mm 500 GB, 7200 and 5400 rpm, 9.5 mm 320 GB, 7200 and 5400 rpm, 9.5 and 7.0 mm 250 GB, 7200 rpm, 9.5 and 7.0 mm 	√	√
Optical drive	Fixed	√	√
	Serial ATA	√	√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
	12.7-mm tray load	√	√
	Supports Blu-ray Disc ROM with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe		√
	Supports Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	√	√
	Supports DVD±RW Double-Layer LightScribe SuperMulti Drive	√	√
	Supports zero-power optical drive		√
Audio and video	Dual array digital microphones with appropriate beam-forming, echo-cancellation, noise-suppression software	√	√
	HD audio	√	√
	Quad speakers	√	√
	HP Beats audio	√	√
	HP triple bass reflex subwoofer	√	√
	HP TrueVision low-light HD VGA webcam (fixed, no tilt with activity LED, 640×480 by 24 frames per second	√	√
Ethernet	Integrated 10/100/1000 network interface card (NIC)	√	√
Wireless	Integrated wireless local area network (WLAN) options by way of wireless module	√	√
	Two WLAN antennas built into display assembly	√	√
	Support for the following WLAN formats:	√	√
	<ul style="list-style-type: none"> Broadcom 4313 802.11B/G/N 1×1 WiFi Adapter Broadcom 4313 802.11B/G/N 1×1 WiFi and 2070 Bluetooth 2.1+EDR Combo adapter (BT3.0HS ready) Ralink RT3090BC4 802.11B/G/N 1×1 WiFi and Bluetooth 2.1+EDR Combo adapter (BT3.0HS ready) Ralink 5390GN 802.11B/G/N 1×1 WiFi Adapter 		

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
	Support for the following WLAN formats: <ul style="list-style-type: none"> Atheros AR9002WB-1NGB 802.11B/G/N 1×1 WiFi and Bluetooth 2.1EDR+ Combo Adapter (BT3.0+HS ready) Atheros 9285G 802.11B/G/N 1×1 WiFi Adapter Realtek 8188BC8 802.11A/B/G/N 2×2 WiFi and Bluetooth 3.0+HS Combo Adapter Realtek 8188GN 802.11B/G/N 1×1 WiFi Adapter 	√	
	Support for the following WLAN formats: <ul style="list-style-type: none"> Intel Centrino Advanced-N 6230 Intel Centrino Wireless-N 1000 WLAN module Intel Centrino Wireless-N + WiMAX 6150 		√
External media card	Digital Media Slot supports the following digital card formats: <ul style="list-style-type: none"> MultiMediaCard Secure Digital (SD) Memory Card Secure Digital High Capacity Memory card Secure Digital Extended Capacity Memory Card 	√	√
	HP Multi-Format digital Media Reader support SD/SDHC/SDXC with UHS104 support, MMC push-push insertion and removal	√	√
Ports	<ul style="list-style-type: none"> 3-pin AC power Audio-in (mono microphone) Audio-out (stereo headphone) HDMI version 1.4 supporting up to 1080p, 1920×1200 @ 60Hz and 1920×1200 @ 60Hz in DVI mode RJ-45 (Ethernet, includes link and activity lights) USB 2.0 (3 ports) VGA (Dsub 15 pin) supporting 2048×1536 external resolution @ 85 and 75 Hz, 1920×1200 external resolution @ 60Hz, hot plug and unplug and auto-detection for correct output to wide-aspect vs. standard aspect video 	√	√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
Keyboard/ pointing devices	Full-size, Dura-coat, island-style keyboard with full numeric keypad	√	√
	TouchPad with multi-touch gestures, 2-finger scrolling, and pinch-zoom enabled	√	√
	Taps enabled by default	√	√
Power requirements	90W slim travel AC adapter with localized cable plug support (3-wire plug with ground pin, supports 3-pin DC connector)	√	√
	65W slim travel AC adapter with localized cable plug support (3-wire plug with ground pin, supports 3-pin DC connector)		
	120W slim travel AC adapter with localized cable plug support (3-wire plug with ground pin, supports 3-pin DC connector)		√
	Support for the following batteries: <ul style="list-style-type: none"> 9-cell, 3.00-Ah (100-Wh) Li-ion battery 6-cell, 2.80-Ah (62-Wh) Li-ion battery 6-cell, 2.55-Ah (55-Wh) Li-ion battery Supports fast charge	√	√
Security	Security cable slot	√	√
	Fingerprint reader with Digital Persona software support		
	Supports Intel AT-p Ready		√

Category	Description	Computer models equipped with an AMD processor	Computer models equipped with an Intel processor
Operating system	Preinstalled:	√	√
	• Windows 7 Home Basic		
	• Windows 7 Home Premium		
	• Windows 7 Professional		
	• RedFlag		
	• FreeDOS		
Serviceability	End-user replaceable parts:	√	√
	• AC adapter		
	• Battery		
	• Hard drives (2)		
	• Memory modules (2)		
	• Optical drive		
	• WLAN module		

2 External component identification

Top


Buttons



Item	Component	Description
(1)	Power button	<ul style="list-style-type: none">• When the computer is off, press the button to turn on the computer.• When the computer is on, press the button briefly to initiate Sleep.• When the computer is in the Sleep state, press the button briefly to exit Sleep.• When the computer is in Hibernation, press the button briefly to exit Hibernation. <p>If the computer has stopped responding and Windows shutdown procedures are ineffective, press and hold the power button for at least 5 seconds to turn off the computer.</p> <p>To learn more about your power settings, select Start > Control Panel > System and Security > Power Options, or refer to the <i>HP Notebook Reference Guide</i>.</p>

Item	Component	Description
(2)	Web browser	Opens a Web browser. NOTE: Until you set up your Internet or network services, this button opens the Internet Connection Wizard.
(3)	Fingerprint reader (select models only)	Allows a fingerprint logon to Windows instead of a password logon.


Keys

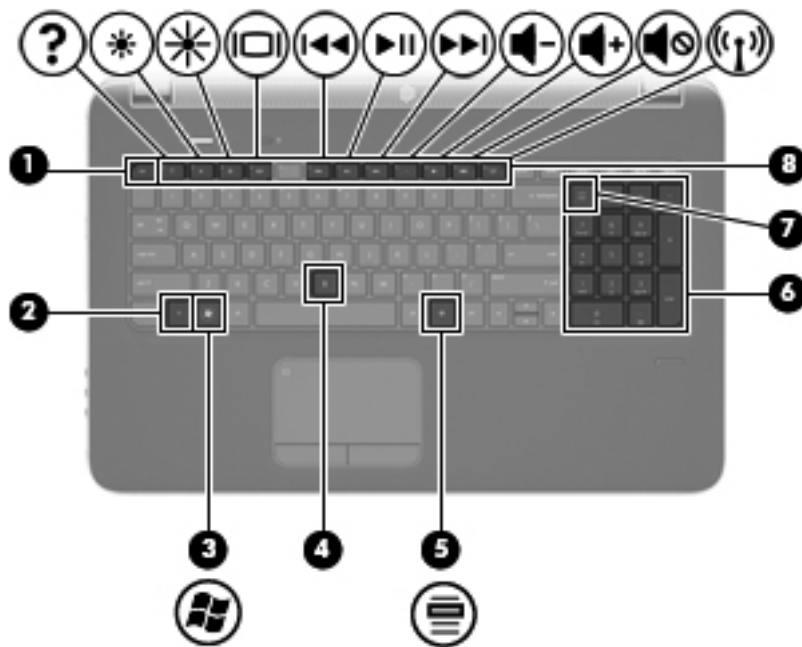

Item	Component	Description
(1)	esc key	Displays system information when pressed in combination with the fn key.
(2)	fn key	Executes frequently used system functions when pressed in combination with the b key, the esc key, or the num lk key.
(3)	Windows logo key	Displays the Windows Start menu.


Item	Component	Description
(4)	b key	<p>Increases or decreases the Beats Audio bass settings.</p> <p>Beats Audio is an enhanced audio profile that provides a deep, controlled bass while maintaining a clear sound. Beats Audio is enabled by default.</p> <p>You can also view and control the bass settings through the Windows operating system. To view and control the bass properties:</p> <ul style="list-style-type: none"> Select Start > Programs > Beats Audio Control Panel > Listening Experience. – or – Select Start > Control Panel > Hardware and Sound > Beats Audio Control Panel > Listening Experience.
(5)	Windows applications key	Displays a shortcut menu for items beneath the pointer.
(6)	Integrated numeric keypad	When the keypad has been enabled, the keys can be used like an external numeric keypad.
(7)	num lk key	Enables/disables the integrated numeric keypad when pressed in combination with the fn key.
(8)	Action keys	Execute frequently used system functions.

Lights

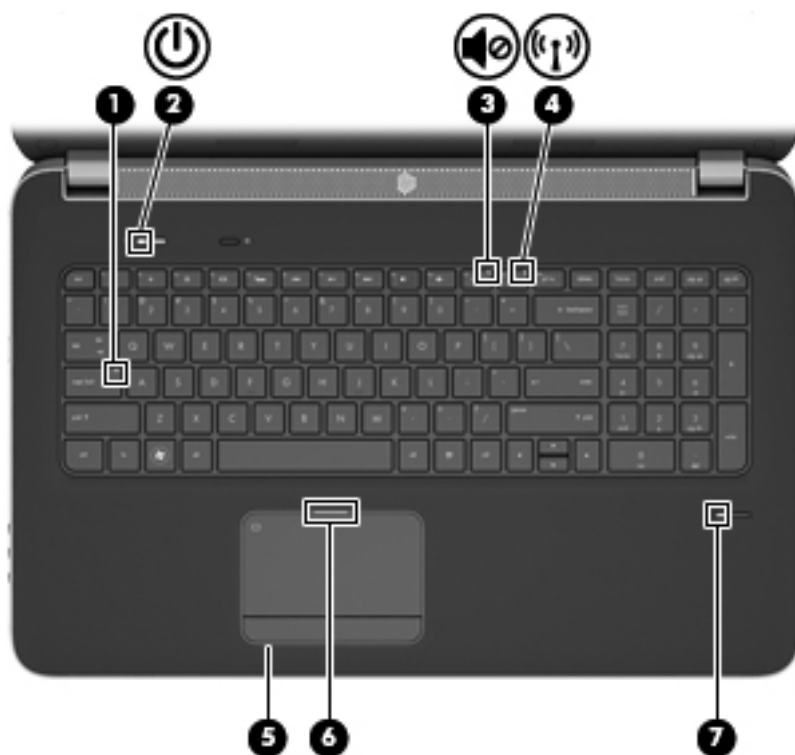

Item	Component	Description
(1)	Caps lock light	<ul style="list-style-type: none"> White: Caps lock is on. Off: Caps lock is off.
(2)	Power light	<ul style="list-style-type: none"> White: The computer is on. Blinking white: The computer is in the Sleep state. Off: The computer is off or in Hibernation.
(3)	Mute light	<ul style="list-style-type: none"> White: Computer sound is on. Amber: Computer sound is off.
(4)	Wireless light	<ul style="list-style-type: none"> White: An integrated wireless device, such as a wireless local area network (WLAN) device and/or a Bluetooth device, is on. Amber: All wireless devices are off.
(5)	TouchPad on light	<ul style="list-style-type: none"> On: The TouchPad is on. Off: The TouchPad is off.
(6)	TouchPad off light	<ul style="list-style-type: none"> Off: The TouchPad is on. On: The TouchPad is off.
(7)	Fingerprint reader light (select models only)	<ul style="list-style-type: none"> White: The fingerprint was read. Amber: The fingerprint was not read.

TouchPad

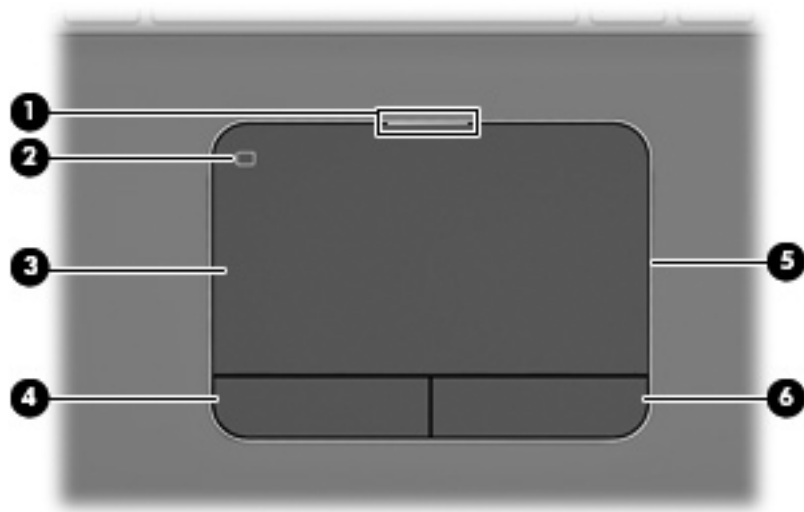

Item	Component	Description
(1)	TouchPad off light	<ul style="list-style-type: none">Off: The TouchPad is on.On: The TouchPad is off.
(2)	TouchPad icon	Turns the TouchPad on and off. Quickly double-tap the TouchPad icon to turn the TouchPad on and off.
(3)	TouchPad zone	Moves the pointer and selects or activates items on the screen.
(4)	Left TouchPad button	Functions like the left button on an external mouse.
(5)	TouchPad on light	<ul style="list-style-type: none">On: The TouchPad is on.Off: The TouchPad is off.
(6)	Right TouchPad button	Functions like the right button on an external mouse.

Display



Item	Component	Description
(1)	WLAN antennas (2)*	Send and receive wireless signals to communicate with wireless local area networks (WLAN).
(2)	Internal microphones (2)	Record sound.
(3)	Webcam light	On: The webcam is in use.
(4)	Webcam	Records video and captures still photographs. To use the webcam, select Start > All Programs > CyberLink YouCam > CyberLink YouCam .


*The antennas are not visible from the outside of the computer. For optimal transmission, keep the areas immediately around the antennas free from obstructions. To see wireless regulatory notices, refer to the section of the *Regulatory, Safety, and Environmental Notices* that applies to your country or region. These notices are located in Help and Support.

Front




Item	Component	Description
(1)	Speakers (2)	Produce sound.
(2)	Digital Media Slot	Supports the following digital card formats: <ul style="list-style-type: none">• MultiMediaCard• Secure Digital (SD) Card

Left side

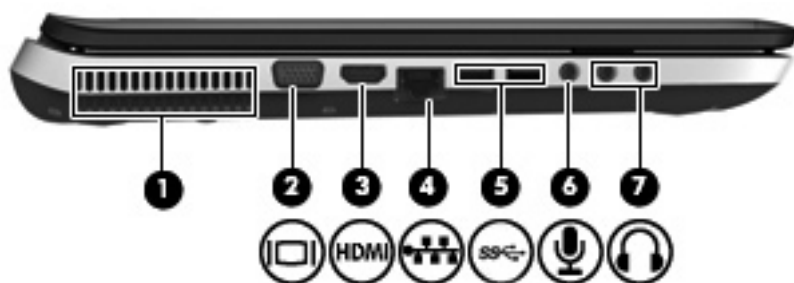


Item	Component	Description
(1)	Vent	Enables airflow to cool internal components. NOTE: The computer fan starts up automatically to cool internal components and prevent overheating. It is normal for the internal fan to cycle on and off during routine operation.
(2)	External monitor port	Connects an external VGA monitor or projector.
(3)	HDMI port	Connects an optional video or audio device, such as a high-definition television, or any compatible digital or audio component.
(4)	RJ-45 (network) jack	Connects a network cable.
(5)	SuperSpeed USB ports (2)	Connect optional USB 3.0 devices and provide enhanced USB power performance. NOTE: The SuperSpeed USB ports are also compatible with USB 1.0 and 2.0 devices.
(6)	Audio-in (microphone) jack	Connects an optional computer headset microphone, stereo array microphone, or monaural microphone.
(7)	Audio-out (headphone) jacks (2)	Produce sound when connected to optional powered stereo speakers, headphones, ear buds, a headset, or television audio. WARNING! To reduce the risk of personal injury, adjust the volume before putting on headphones, earbuds, or a headset. For additional safety information, refer to the Regulatory, Safety, and Environmental Notices. NOTE: When a device is connected to a jack, the computer speakers are disabled.

Right side

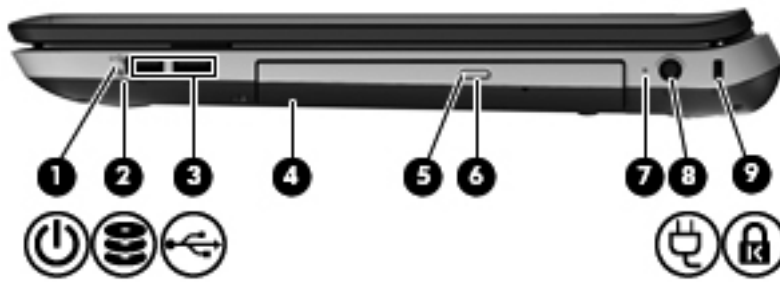

Item	Component	Description
(1)	Power light	<ul style="list-style-type: none"> White: The computer is on. Blinking white: The computer is in the Sleep state. Off: The computer is off or in Hibernation.
(2)	Drive light	<ul style="list-style-type: none"> Blinking white: The hard drive is being accessed. Amber: HP ProtectSmart Hard Drive Protection has temporarily parked the hard drive. <p>NOTE: For information on HP ProtectSmart Hard Drive Protection, refer to the <i>HP Notebook Reference Guide</i>.</p>
(3)	USB ports (2)	Connect optional USB devices.
(4)	Optical drive	Reads and writes to an optical disc.
(5)	Optical drive light	<ul style="list-style-type: none"> White: The optical drive is being accessed. Amber: The optical drive is off.
(6)	Optical drive eject button	Ejects the optical disc.
(7)	AC adapter light	<ul style="list-style-type: none"> White: The computer is connected to external power and the battery is fully charged. Amber: The battery is charging. Off: The computer is not connected to external power.
(8)	Power connector	Connects an AC adapter.
(9)	Security cable slot	<p>Attaches an optional security cable to the computer.</p> <p>NOTE: The security cable is designed to act as a deterrent, but it may not prevent the computer from being mishandled or stolen.</p>

Bottom

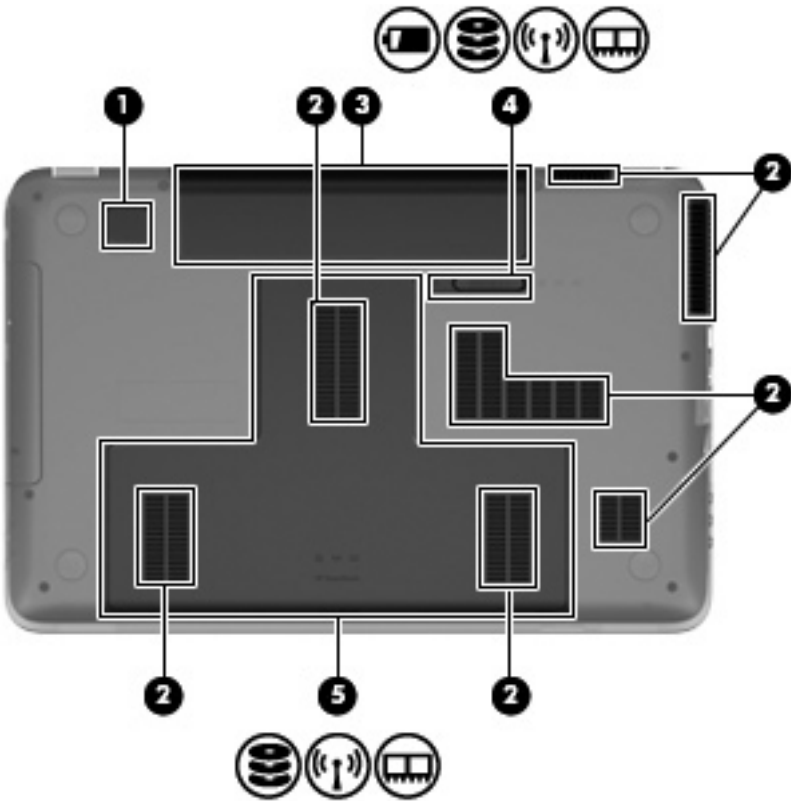


Item	Component	Description
(1)	Integrated subwoofer	Provides superior bass sound.
(2)	Vents (7)	Enable airflow to cool internal components. NOTE: The computer fan starts up automatically to cool internal components and prevent overheating. It is normal for the internal fan to cycle on and off during routine operation.
(3)	Battery bay	Holds the battery.
(4)	Battery release latch	Releases the battery from the battery bay, and releases the hard drive/memory module compartment cover.
(5)	Hard drive bay	Holds the hard drive and wireless LAN (WLAN) device, and contains the memory module slots. CAUTION: To prevent an unresponsive system, replace the wireless module only with a wireless module authorized for use in the computer by the governmental agency that regulates wireless devices in your country or region. If you replace the module and then receive a warning message, remove the module to restore computer functionality, and then contact technical support through Help and Support.

3 Illustrated parts catalog


Service tag

When ordering parts or requesting information, provide the computer serial number and model description provided on the service tag. [When ordering parts or requesting information, provide the computer serial number and model description provided on the service tag.]

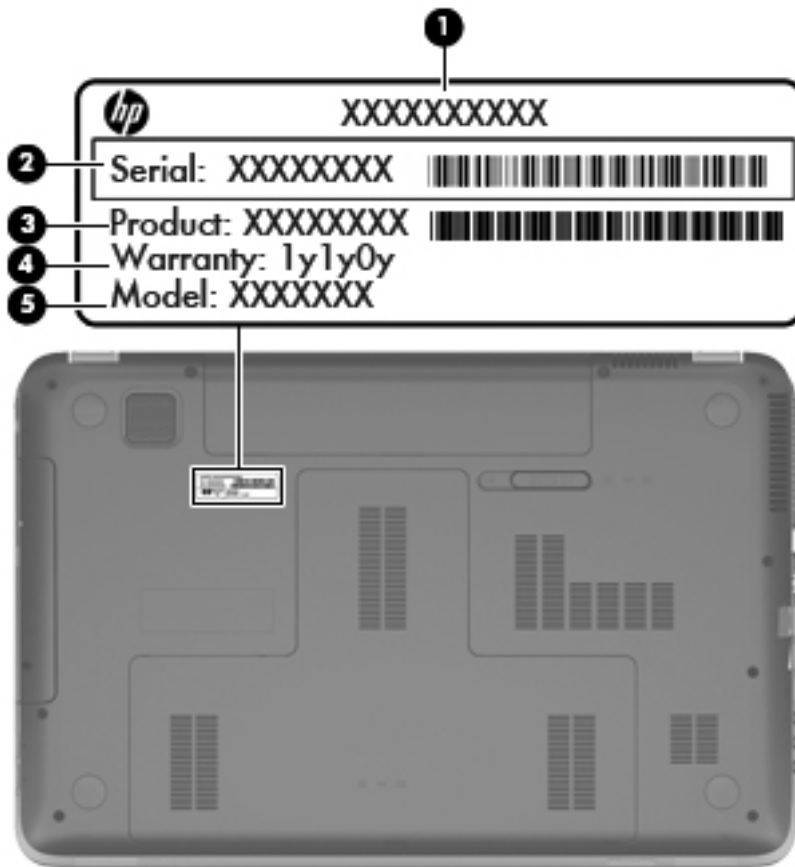

Item	Description	Function
(1)	Product name:	This is the product name affixed to the front of the computer.
(2)	Serial number (s/n):	This is an alphanumeric identifier that is unique to each product.
(3)	Part number/Product number (p/n):	This number provides specific information about the product's hardware components. The part number helps a service technician to determine what components and parts are needed.
(4)	Warranty period:	This number describes the duration of the warranty period for the computer.
(5)	Model description:	This is the alphanumeric identifier needed to locate documents, drivers, and support for the computer.

Computer major components

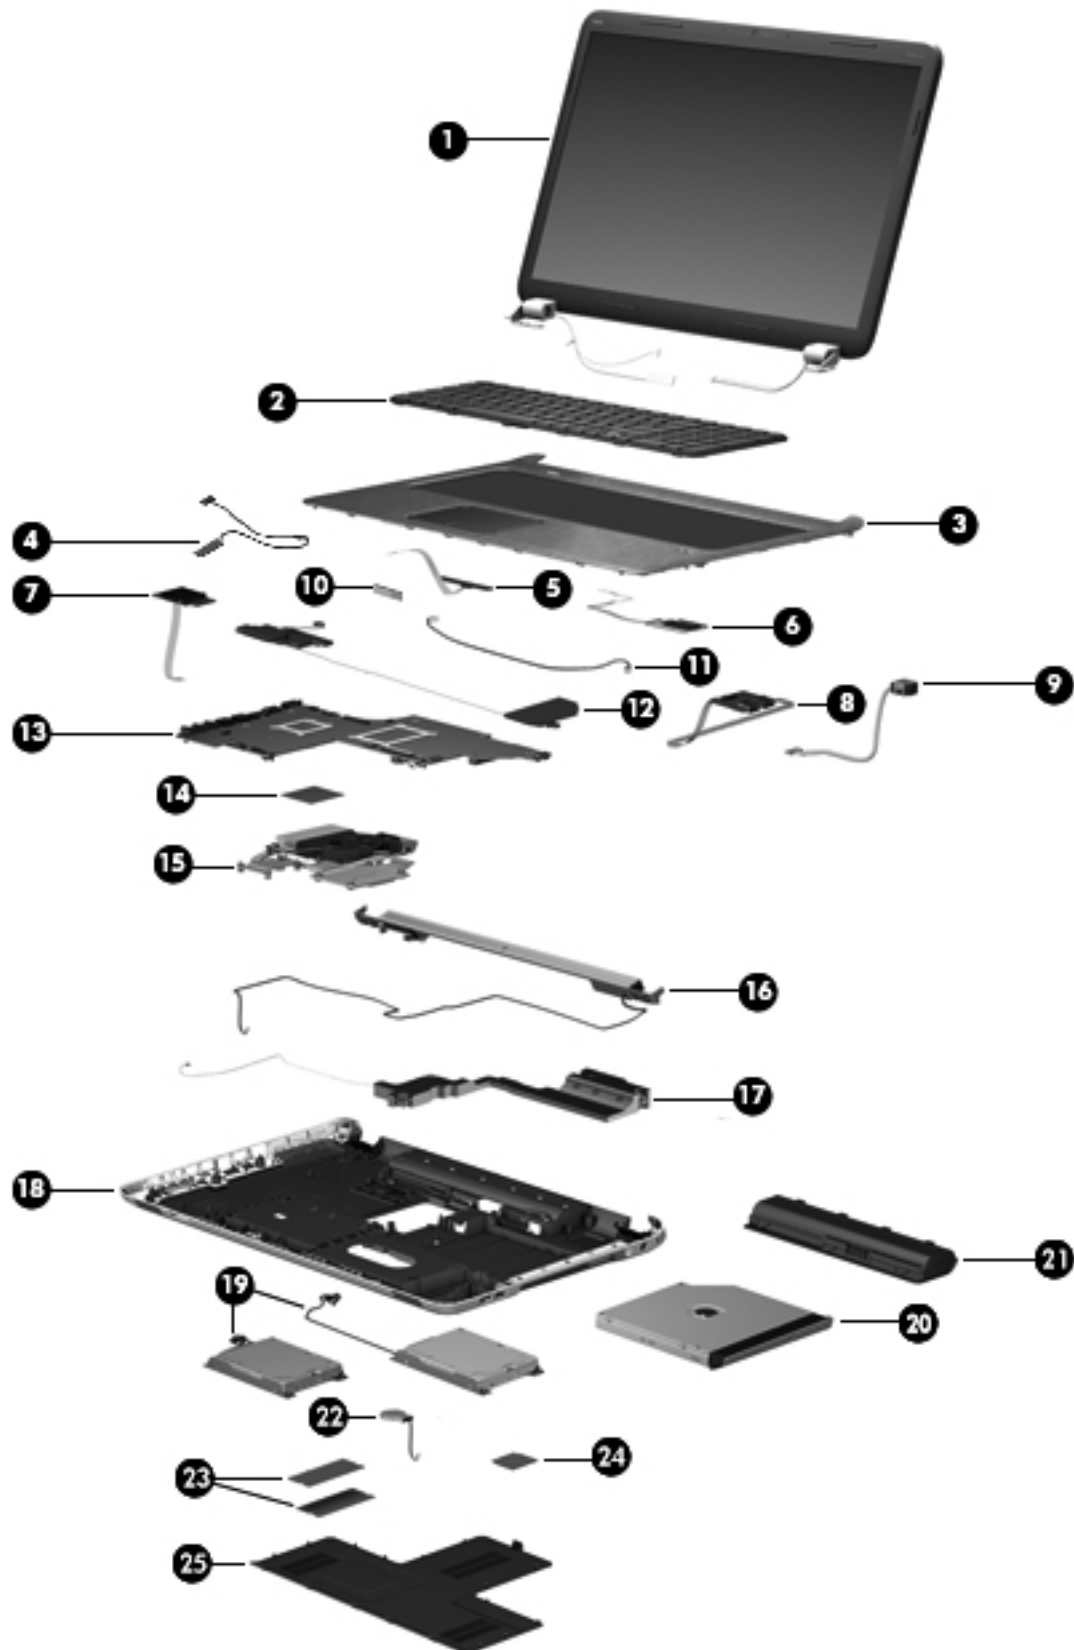

Item	Component	Spare part number
(1)	17.3-in, BrightView, high definition+ (HD+), light-emitting diode (LED), low-voltage differential signaling (LVDS) display assembly (includes webcam, two microphones, and wireless antenna transceivers and cables)	639397-001
	NOTE: For more display assembly spare part information, see Display assembly subcomponents on page 29 .	
(2)	Keyboard (includes keyboard cable):	
	For use with all computer models:	
	For use in Belgium	639396-A41
	For use in Canada	639396-121
	For use in the Czech Republic	639396-221
	For use in Denmark, Finland, and Norway	639396-DH1
	For use in France	639396-051
	For use in Germany	639396-041
	For use in Greece	639396-DJ1
	For use in Hungary	639396-211
	For use in Italy	639396-061
	For use in the Netherlands	639396-B31
	For use in Portugal	639396-131
	For use in Russia	639396-251
	For use in Slovenia	639396-BA1
	For use in Spain	639396-071
	For use in Switzerland	639396-BG1
	For use in the United Kingdom and Singapore	639396-031
	For use in the United States	639396-001
	For use only with computer models equipped with an Intel processor:	
	For use in Israel	639396-BB1
	For use in Japan	639396-291
	For use in Saudi Arabia	639396-171
	For use in South Korea	639396-AD1
	For use in Taiwan	639396-AB1
	For use in Thailand	639396-281
	For use in Turkey	639396-141
(3)	Top cover (includes TouchPad and TouchPad cable and TouchPad button board and TouchPad button board cable)	639388-001

Item	Component	Spare part number
(4)	Display lid switch board (includes cable)	647270-001
(5)	Power button board (does not include cable)	640898-001
(6)	Fingerprint reader board (includes bracket, but does not include cable)	640427-001
(7)	SD Card reader board (does not include cable)	640899-001
(8)	USB board (does not include cable)	646434-001
	Cable Kit , includes:	639402-001
(9)	Power connector cable	
	Not illustrated:	
	Fingerprint reader board cable	
	Power button board cable	
	SD Card reader board cable	
	TouchPad cable	
	TouchPad button board cables	
	USB board cable	
(10)	Bluetooth module (for use only with computer models equipped with an Intel processor, does not include cable)	537921-001
(11)	Bluetooth module cable (for use only with computer models equipped with an Intel processor)	647271-001
(12)	Front speakers (includes front left and right speakers and cables)	639394-001
(13)	System board (includes replacement thermal material):	
	For use only with computer models equipped with an AMD processor:	
	System board for use only with computer models equipped with the 6750 chipset and a graphics subsystem with discrete memory (includes 1024-MB of discrete graphics subsystem memory)	645386-001
	System board for use only with computer models equipped with the 6650 chipset and a graphics subsystem with discrete memory (includes 1024-MB of discrete graphics subsystem memory)	641576-001
	System board for use only with computer models equipped with the 6490 chipset and a graphics subsystem with discrete memory (includes 512-MB of discrete graphics subsystem memory)	645385-001
	System board for use only with computer models equipped with the 6470 chipset and a graphics subsystem with discrete memory (includes 512-MB of discrete graphics subsystem memory)	641575-001
	System board for use only with computer models equipped with the HM65 chipset and a graphics subsystem with UMA memory (includes replacement thermal material)	641577-001
	System board for use only with computer models equipped with a graphics subsystem with UMA memory (includes replacement thermal material)	645384-001


Item	Component	Spare part number
	For use only with computer models equipped with an Intel processor:	
	For use only with computer models equipped with the 6770 chipset and an Intel Quad Core processor (includes 1024-MB of discrete graphics subsystem memory)	639391-001
	For use only with computer models equipped with the 6770 chipset and an Intel Dual Core processor (includes 1024-MB of discrete graphics subsystem memory)	639392-001
	For use only with computer models equipped with the 6490 chipset and an Intel Quad Core processor (includes 1024-MB of discrete graphics subsystem memory)	639389-001
	For use only with computer models equipped with the 6490 chipset and an Intel Dual Core processor (includes 1024-MB of discrete graphics subsystem memory)	639390-001
	Thermal Material Kit (includes replacement thermal pads and paste):	
	For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	640457-001
	For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	640456-001
	For use only with computer models equipped with an Intel processor	641493-001
(14)	Processor (includes replacement thermal material)	
	AMD Athlon II N370 2.50-GHz processor (1.0-MB L2 cache, 1066-MHz FSB, 3.2-GT/second, Dual Core, 35W)	634686-001
	AMD Athlon II P340 2.20-GHz processor (1.0-MB L2 cache, 1066-MHz FSB, 3.2-GT/second, Dual Core, 25W)	616343-001
	AMD Athlon II P360 2.30-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 25W)	636635-001
	AMD Phenom II N850 2.20-GHz processor (1.5-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Triple Core, 35W)	616345-001
	AMD Phenom II P960 1.80-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Quad Core, 25W)	634689-001
	AMD Phenom II P860 2.00-GHz processor (1.5-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Triple Core, 25W)	634688-001
	AMD Phenom II P650 2.60-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Dual Core, 25W)	634687-001
	AMD Phenom II N660 3.00-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Dual Core 35W)	635494-001
	AMD Phenom II N870 2.30-GHz processor (1.5-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Triple Core, 35W)	635495-001
	AMD Phenom II N970 2.20-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Quad Core, 35W)	635496-001
	AMD Turion II N570 2.70-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 35W)	634690-001
	AMD Turion II N560 2.50-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 35W)	634691-001

Item	Component	Spare part number
	Intel Quad Core i7-2820QM 2.30-GHz (turbo up to 3.10-GHz) processor (1600-MHz FSB, 8-MB L3 cache, 45W)	634694-001
	Intel Quad Core i7-2720QM 2.20-GHz (turbo up to 3.00-GHz) processor (1600-MHz FSB, 6-MB L3 cache, 45W)	631254-001
	Intel Quad Core i7-2630QM 2.00-GHz (turbo up to 2.90-GHz) processor (1600-MHz FSB, 6-MB L3 cache, 45W)	635501-001
	Intel Dual Core i7-2620M 2.70-GHz (turbo up to 3.40-GHz) processor (1333-MHz FSB, 4-MB L3 cache, 35W)	631252-00
	Intel Dual Core i5-2540M 2.60-GHz (turbo up to 3.30-GHz) processor (1333-MHz FSB, 3-MB L3 cache, 35W)	631255-001
	Intel Dual Core i5-2520M 2.50-GHz (turbo up to 3.20-GHz) processor (1333-MHz FSB, 3-MB L3 cache, 35W)	631253-001
	Intel Dual Core i5-2410M 2.30-GHz (turbo up to 2.90-GHz) processor (3-MB L3 cache, 35W)	638039-00
	Intel Dual Core i3-2310M 2.10-GHz processor (3-MB L3 cache, 35W)	638037-001
	Thermal Material Kit (includes replacement thermal pads and paste):	
	For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	640457-001
	For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	640456-001
	For use only with computer models equipped with an Intel processor	641493-001
(15)	Fan/heat sink assembly (includes replacement thermal material):	
	For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	641578-001
	For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	639404-001
	For use only with computer models equipped with an Intel processor	640903-001
	Thermal Material Kit (includes replacement thermal pads and paste):	
	For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	640457-001
	For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	640456-001
	For use only with computer models equipped with an Intel processor	641493-001
(16)	Rear speakers (includes rear left and right speakers, grill, and cable)	641304-001
(17)	Subwoofer (includes isolators and cable)	639393-001
(18)	Base enclosure (includes battery release latch and 4 rubber feet)	639399-001
(19)	Hard drive (2, 2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws):	
	1-TB, 5400-rpm	638974-001

Item	Component	Spare part number
	750-GB, 7200-rpm	633252-001
	750-GB, 5400-rpm	634250-001
	640-GB, 7200-rpm	621046-001
	640-GB, 5400-rpm	603785-001
	500-GB, 7200-rpm for use only with computer models equipped with an AMD processor	634919-001
	500-GB, 7200-rpm for use only with computer models equipped with an Intel processor	608218-001
	320-GB, 7200-rpm	634862-001 and 641672-001
	320-GB, 5400-rpm	622643-001 and 645193-001
	250-GB, 7200-rpm	634861-001 and 635225-001
	Hard Drive Hardware Kit (not illustrated, includes bracket, connector cable, Mylar shield, and screws)	641306-001
	160-GB solid-state drive for use only with computer models equipped with an Intel processor (not illustrated, does not include bracket, connector cable, Mylar shield, or screws)	639405-001
(20)	Optical drive (includes bezel and bracket):	
	For use only with computer models equipped with an AMD processor:	
	Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641850-001
	DVD±RW Double-Layer LightScribe SuperMulti Drive	641851-001
	For use only with computer models equipped with an Intel processor:	
	Blu-ray Disc ROM with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641302-001
	Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641303-001
	DVD±RW Double-Layer LightScribe SuperMulti Drive	641301-001
	Optical Drive Hardware Kit (not illustrated, includes bracket, optical drive cable, bezels (2), and screws)	641549-001
(21)	Battery	
	9-cell, 100-WHr, 3.00-AHr, LI	636631-001
	6-cell, 62-WHr, 2.80-AHr, LI	593562-001
	6-cell, 55-WHr, 2.55-AHr, LI	593554-001
(22)	RTC battery (includes cable and double-sided tape)	640902-001
(23)	Memory modules (2, DDR3, 10600, 1333-MHz)	
	4 GB	621569-001
	2 GB	621565-001


Item	Component	Spare part number
	1 GB	639736-001
(24)	WLAN module:	
	For use with all computer models:	
	Broadcom 4313 802.11B/G/N 1×1 WiFi Adapter	593836-001
	Broadcom 4313 802.11B/G/N 1×1 WiFi and 2070 Bluetooth 2.1+EDR Combo adapter (BT3.0HS ready)	600370-001
	Ralink RT3090BC4 802.11B/G/N 1×1 WiFi and Bluetooth 2.1+EDR Combo adapter (BT3.0HS ready)	630705-001
	Ralink 5390GN 802.11B/G/N 1×1 WiFi Adapter	630703-001
	For use only with computer models equipped with an AMD processor:	
	Atheros 9285G 802.11B/G/N 1×1 WiFi Adapter	518436-001
	Atheros AR9002WB-1NGB 802.11B/G/N 1×1 WiFi and Bluetooth 2.1EDR+ Combo Adapter (BT3.0+HS ready)	593127-001
	Realtek 8188BC8 802.11a/b/g/n 2×2 WiFi and Bluetooth 3.0+HS Combo Adapter	602993-001
	Realtek 8188GN 802.11b/g/n 1×1 WiFi Adapter	640926-001
	For use only with computer models equipped with an Intel processor:	
	Intel Centrino Advanced-N 6230	631956-001
	Intel Centrino Wireless-N 1000	572520-001
	Intel Centrino Wireless-N + WiMAX 6150	633817-001
(25)	Service cover — available in the Plastics Kit, spare part number 641305-001)	

Display assembly subcomponents

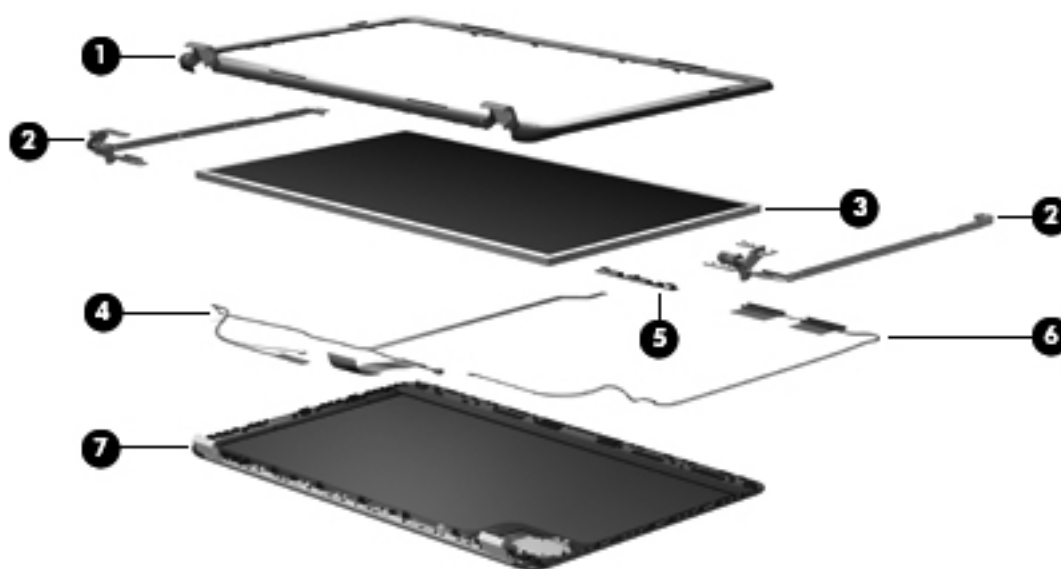

Item	Component	Spare part number
(1)	Display bezel	639398-001
(2)	Display Hinge Kit (includes left and right display hinges and brackets)	639403-001
(3)	17.3-in, BrightView, HD+, LED, LVDS display panel	641629-001
(4)	Display Cable Kit (includes display panel cable and webcam/microphone module cable)	640900-001
(5)	Webcam/microphone module	639387-001
(6)	Antenna Kit (includes left and right wireless antenna cables and transceivers)	639401-001
(7)	Display enclosure	639400-001
	Display Rubber Kit (not illustrated, include Mylar screw covers)	640901-001
	Display Screw Kit (not illustrated)	641582-001

Mass storage devices

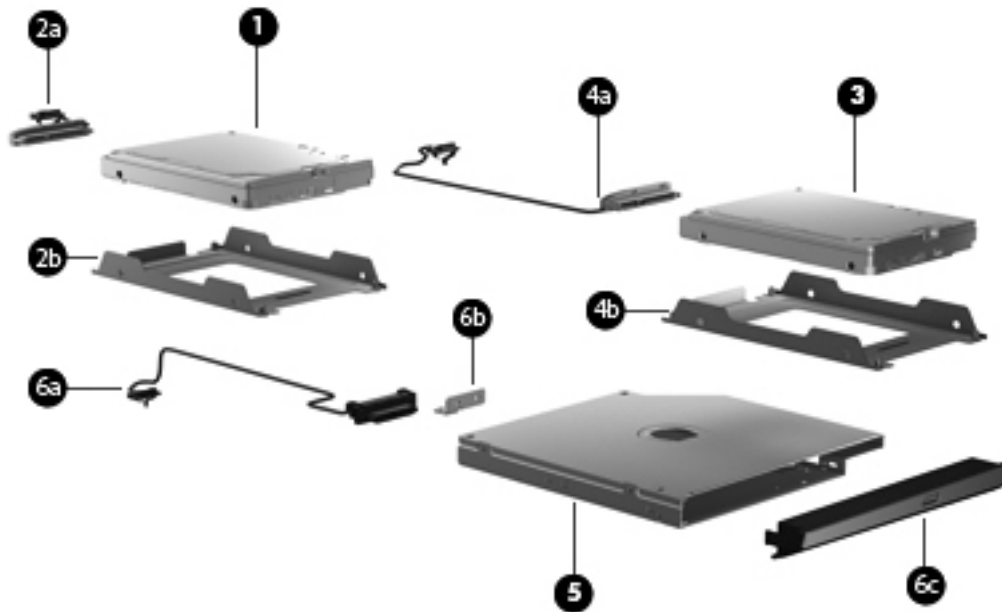

Item	Component	Spare part number
(1)	Hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws):	
	1-TB, 5400-rpm	638974-001
	750-GB, 7200-rpm	633252-001
	750-GB, 5400-rpm	634250-001
	640-GB, 7200-rpm	621046-001
	640-GB, 5400-rpm	603785-001
	500-GB, 7200-rpm for use only with computer models equipped with an AMD processor	634919-001
	500-GB, 7200-rpm for use only with computer models equipped with an Intel processor	608218-001
	320-GB, 7200-rpm	634862-001 and 641672-001
	320-GB, 5400-rpm	622643-001 and 645193-001
	250-GB, 7200-rpm	634861-001 and 635225-001
	Hard Drive Hardware Kit , includes:	641306-001
(2a)	Primary hard drive connector cable	
(2b)	Primary hard drive bracket	
(4a)	Secondary hard drive connector cable	
(4b)	Secondary hard drive bracket	

Item	Component	Spare part number
	Screws (not illustrated)	
(3)	160-GB solid-state drive (does not include bracket, connector cable, Mylar shield, or screws)	639405-001
(5)	Optical drive (includes bezel and bracket):	
	For use only with computer models equipped with an AMD processor:	
	Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641850-001
	DVD±RW Double-Layer LightScribe SuperMulti Drive	641851-001
	For use only with computer models equipped with an Intel processor:	
	Blu-ray Disc ROM with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641302-001
	Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641303-001
	DVD±RW Double-Layer LightScribe SuperMulti Drive	641301-001
	Optical Drive Hardware Kit , includes:	641549-001
(6a)	Optical drive cable	
(6b)	Optical drive bracket	
(6c)	Optical drive bezel	
	Screws (not illustrated)	

Miscellaneous parts

Component	Spare part number
HP Smart AC adapter	
90-W, PFC, RC, V HP Smart AC adapter for use with all computer models	609940-001
65-W RC, V HP Smart AC adapter for use only with computer models equipped with an AMD processor	609939-001
120-W, PFC, RC, V HP Smart AC adapter for use only with computer models equipped with an Intel processor	609941-001
90-W, PFC, RC, V, EM HP Smart AC adapter for use only with computer models equipped with an Intel processor	609947-001
Power cord (3-pin, black, 1.83-meter):	
For use with all computer models:	
For use in Denmark	490371-081
For use in Europe	490371-021
For use in Italy	490371-061
For use in North America	490371-001

Component	Spare part number
For use in the Netherlands	490371-B31
For use in Switzerland	490371-111
For use in the United Kingdom and Singapore	490371-031
For use only with computer models equipped with an Intel processor:	
For use in Australia	490371-011
For use in Brazil	490371-201
For use in India	490371-D61
For use in Israel	490371-BB1
For use in Japan	490371-291
For use in South Korea	490371-AD1
For use in Taiwan	490371-AB1
Remote control (full-function with teletext)	465541-004
Screw Kit	639395-001
USB DVB-T dipole antenna	581223-001
USB DVB-T TV tuner	581222-001

Sequential part number listing

Spare part number	Description
465541-004	Remote control (full-function with teletext)
490371-001	Power cord for use with all computer models in North America (3-pin, black, 1.83-meter)
490371-011	Power cord for use only with computer models equipped with an Intel processor in Australia (3-pin, black, 1.83-meter)
490371-021	Power cord for use with all computer models in Europe (3-pin, black, 1.83-meter)
490371-031	Power cord for use with all computer models in the United Kingdom and Singapore (3-pin, black, 1.83-meter)
490371-061	Power cord for use with all computer models in Italy (3-pin, black, 1.83-meter)
490371-081	Power cord for use with all computer models in Denmark (3-pin, black, 1.83-meter)
490371-111	Power cord for use with all computer models in Switzerland (3-pin, black, 1.83-meter)
490371-201	Power cord for use only with computer models equipped with an Intel processor in Brazil (3-pin, black, 1.83-meter)
490371-291	Power cord for use only with computer models equipped with an Intel processor in Japan (3-pin, black, 1.83-meter)

Spare part number	Description
490371-AB1	Power cord for use only with computer models equipped with an Intel processor in Taiwan (3-pin, black, 1.83-meter)
490371-AD1	Power cord for use only with computer models equipped with an Intel processor in South Korea (3-pin, black, 1.83-meter)
490371-AR1	Power cord for use with all computer models in South Africa (3-pin, black, 1.83-meter)
490371-BB1	Power cord for use only with computer models equipped with an Intel processor in Israel (3-pin, black, 1.83-meter)
490371-D61	Power cord for use only with computer models equipped with an Intel processor in India (3-pin, black, 1.83-meter)
518436-001	Atheros 9285G 802.11B/G/N 1x1 WiFi Adapter for use only with computer models equipped with an AMD processor
537921-001	Bluetooth module (for use only with computer models equipped with an Intel processor, does not include cable)
572520-001	Intel Centrino Wireless-N 1000 WLAN module for use only with computer models equipped with an Intel processor
581222-001	USB DVB-T TV tuner
581223-001	USB DVB-T dipole antenna
593127-001	Atheros AR9002WB-1NGB 802.11B/G/N 1x1 WiFi and Bluetooth 2.1EDR+ Combo Adapter (BT3.0+HS ready) for use only with computer models equipped with an AMD processor
593554-001	6-cell, 55-WHr, 2.55-AHr, Li battery
593562-001	6-cell, 62-WHr, 2.80-AHr, Li battery
593836-001	Broadcom 4313 802.11B/G/N 1x1 WiFi Adapter for use with all computer models
600370-001	Broadcom 4313 802.11B/G/N 1x1 WiFi and 2070 Bluetooth 2.1+EDR Combo adapter (BT3.0HS ready) for use with all computer models
602993-001	Realtek 8188BC8 802.11a/b/g/n 2x2 WiFi and Bluetooth 3.0+HS Combo Adapter for use only with computer models equipped with an AMD processor
603785-001	640-GB, 5400-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
608218-001	500-GB, 7200-rpm hard drive for use only with computer models equipped with an Intel processor (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
609939-001	65-W RC, V HP Smart AC adapter for use only with computer models equipped with an AMD processor
609940-001	90-W, PFC, RC, V HP Smart AC adapter
609941-001	120-W, PFC, RC, V HP Smart AC adapter for use only with computer models equipped with an Intel processor
609947-001	90-W, PFC, RC, V, EM HP Smart AC adapter for use only with computer models equipped with an Intel processor
616343-001	AMD Athlon II P340 2.20-GHz processor (1.0-MB L2 cache, 1066-MHz FSB, 3.2-GT/second, Dual Core, 25W)

Spare part number	Description
616345-001	AMD Phenom II N850 2.20-GHz processor (1.5-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Triple Core, 35W)
621046-001	640-GB, 7200-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
621565-001	2-GB memory module (DDR3, 10600, 1333-MHz)
621569-001	4-GB memory module (DDR3, 10600, 1333-MHz)
622643-001	320-GB, 5400-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
630703-001	Ralink 5390GN 802.11B/G/N 1×1 WiFi Adapter for use with all computer models
630705-001	Ralink RT3090BC4 802.11B/G/N 1×1 WiFi and Bluetooth 2.1+EDR Combo adapter (BT3.0HS ready) for use with all computer models
631252-001	Intel Dual Core i7-2620M 2.70-GHz (turbo up to 3.40-GHz) processor (1333-MHz FSB, 4-MB L3 cache, 35W, includes replacement thermal material)
631253-001	Intel Dual Core i5-2520M 2.50-GHz (turbo up to 3.20-GHz) processor (1333-MHz FSB, 3-MB L3 cache, 35W, includes replacement thermal material)
631254-001	Intel Quad Core i7-2720QM 2.20-GHz (turbo up to 3.00-GHz) processor (1600-MHz FSB, 6-MB L3 cache, 45W, includes replacement thermal material)
631255-001	Intel Dual Core i5-2540M 2.60-GHz (turbo up to 3.30-GHz) processor (1333-MHz FSB, 3-MB L3 cache, 35W, includes replacement thermal material)
631956-001	Intel Centrino Advanced-N 6230 for use only with computer models equipped with an Intel processor
633252-001	750-GB, 7200-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
633817-001	Intel Centrino Wireless-N + WiMAX 6150 for use only with computer models equipped with an Intel processor
634250-001	750-GB, 5400-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
634686-001	AMD Athlon II N370 2.50-GHz processor (1.0-MB L2 cache, 1066-MHz FSB, 3.2-GT/second, Dual Core, 35W)
634687-001	AMD Phenom II P650 2.60-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Dual Core, 25W)
634688-001	AMD Phenom II P860 2.00-GHz processor (1.5-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Triple Core, 25W)
634689-001	AMD Phenom II P960 1.80-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Quad Core, 25W)
634690-001	AMD Turion II N570 2.70-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 35W)
634691-001	AMD Turion II N560 2.50-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 35W)
634694-001	Intel Quad Core i7-2820QM 2.30-GHz (turbo up to 3.10-GHz) processor (1600-MHz FSB, 8-MB L3 cache, 45W, includes replacement thermal material)

Spare part number	Description
634861-001	250-GB, 7200-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
634862-001	320-GB, 7200-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
634919-001	500-GB, 7200-rpm hard drive for use only with computer models equipped with an AMD processor (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
635225-001	250-GB, 7200-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
635494-001	AMD Phenom II N660 3.00-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Dual Core 35W)
635495-001	AMD Phenom II N870 2.30-GHz processor (1.5-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Triple Core, 35W)
635496-001	AMD Phenom II N970 2.20-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Quad Core, 35W)
635501-001	Intel Quad Core i7-2630QM 2.00-GHz (turbo up to 2.90-GHz) processor (1600-MHz FSB, 6-MB L3 cache, 45W, includes replacement thermal material)
636631-001	9-cell, 100-WHr, 3.00-AHr, Li battery
636635-001	AMD Athlon II P360 2.30-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 25W)
638037-001	Intel Dual Core i3-2310M 2.10-GHz processor (3-MB L3 cache, 35W, includes replacement thermal material)
638039-001	Intel Dual Core i5-2410M 2.30-GHz (turbo up to 2.90-GHz) processor (3-MB L3 cache, 35W, includes replacement thermal material)
638974-001	1-TB, 5400-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
639387-001	Webcam/microphone module
639388-001	Top cover (includes TouchPad and TouchPad cable and TouchPad button board and TouchPad button board cable)
639389-001	System board for use only with computer models equipped with an Intel Quad Core processor and the 6490 chipset (includes 1024-MB of discrete graphics subsystem memory and replacement thermal material)
639390-001	System board for use only with computer models equipped with an Intel Dual Core processor and the 6490 chipset (includes 1024-MB of discrete graphics subsystem memory and replacement thermal material)
639391-001	System board for use only with computer models equipped with an Intel Quad Core processor and the 6770 chipset (includes 1024-MB of discrete graphics subsystem memory and replacement thermal material)
639392-001	System board for use only with computer models equipped with an Intel Dual Core processor and the 6770 chipset (includes 1024-MB of discrete graphics subsystem memory and replacement thermal material)
639393-001	Subwoofer (includes isolators and cable)

Spare part number	Description
639394-001	Front speakers (include front left and right speakers and cables)
639395-001	Screw Kit
639396-001	Keyboard for use with all computer models in the United States (includes keyboard cable)
639396-031	Keyboard for use with all computer models in the United Kingdom and Singapore (includes keyboard cable)
639396-041	Keyboard for use with all computer models in Germany (includes keyboard cable)
639396-051	Keyboard for use with all computer models in France (includes keyboard cable)
639396-061	Keyboard for use with all computer models in Italy (includes keyboard cable)
639396-071	Keyboard for use with all computer models in Spain (includes keyboard cable)
639396-121	Keyboard for use with all computer models in Canada (includes keyboard cable)
639396-131	Keyboard for use with all computer models in Portugal (includes keyboard cable)
639396-141	Keyboard for use only with computer models equipped with an Intel processor in Turkey (includes keyboard cable)
639396-171	Keyboard for use only with computer models equipped with an Intel processor in Saudi Arabia (includes keyboard cable)
639396-211	Keyboard for use with all computer models in Hungary (includes keyboard cable)
639396-221	Keyboard for use with all computer models in the Czech Republic (includes keyboard cable)
639396-251	Keyboard for use with all computer models in Russia (includes keyboard cable)
639396-281	Keyboard for use only with computer models equipped with an Intel processor in Thailand (includes keyboard cable)
639396-291	Keyboard for use only with computer models equipped with an Intel processor in Japan (includes keyboard cable)
639396-A41	Keyboard for use with all computer models in Belgium (includes keyboard cable)
639396-AB1	Keyboard for use only with computer models equipped with an Intel processor in Taiwan (includes keyboard cable)
639396-AD1	Keyboard for use only with computer models equipped with an Intel processor South Korea (includes keyboard cable)
639396-B31	Keyboard for use with all computer models in the Netherlands (includes keyboard cable)
639396-BA1	Keyboard for use with all computer models in Slovenia (includes keyboard cable)
639396-BB1	Keyboard for use only with computer models equipped with an Intel processor in Israel (includes keyboard cable)
639396-BG1	Keyboard for use with all computer models in Switzerland (includes keyboard cable)
639396-DH1	Keyboard for use with all computer models in Denmark, Finland, and Norway (includes keyboard cable)
639396-DJ1	Keyboard for use with all computer models in Greece (includes keyboard cable)

Spare part number	Description
639397-001	17.3-in, BrightView, high definition+ (HD+), light-emitting diode (LED), low-voltage differential signaling (LVDS) display assembly (includes webcam, two microphones, and wireless antenna transceivers and cables)
639398-001	Display bezel
639399-001	Base enclosure (includes battery release latch and 4 rubber feet)
639400-001	Display enclosure
639401-001	Antenna Kit (includes left and right wireless antenna cables and transceivers)
639402-001	Cable Kit
639403-001	Display Hinge Kit (includes left and right display hinges and brackets)
639404-001	Fan/heat sink assembly for use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory (includes replacement thermal material)
639405-001	160-GB solid-state drive for use only with computer models equipped with an Intel processor (does not include bracket, connector cable, Mylar shield, or screws)
639736-001	1-GB memory module (DDR3, 10600, 1333-MHz)
640427-001	Fingerprint reader board (includes bracket, but does not include cable)
640456-001	Thermal Material Kit for use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory (includes replacement thermal pads and paste)
640457-001	Thermal Material Kit for use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory (includes replacement thermal pads and paste)
640898-001	Power button board (does not include cable)
640899-001	SD Card reader board (does not include cable)
640900-001	Display Cable Kit (includes display panel cable and webcam/microphone module cable)
640901-001	Display Rubber Kit (include Mylar screw covers)
640902-001	RTC battery (includes cable and double-sided tape)
640903-001	Fan/heat sink assembly for use only with computer models equipped with an Intel processor (includes replacement thermal material)
640926-001	Realtek 8188GN 802.11b/g/n 1x1 WiFi Adapter for use only with computer models equipped with an AMD processor
641301-001	DVD±RW Double-Layer LightScribe SuperMulti Drive for use only with computer models equipped with an Intel processor
641302-001	Blu-ray Disc ROM with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe for use only with computer models equipped with an Intel processor
641303-001	Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe for use only with computer models equipped with an Intel processor
641304-001	Rear speakers (include rear left and right speakers, grill, and cable)
641305-001	Plastics Kit (includes service cover)

Spare part number	Description
641306-001	Hard Drive Hardware Kit (includes bracket, connector cable, Mylar shield, and screws)
641493-001	Thermal Material Kit for use only with computer models equipped with an Intel processor (includes replacement thermal pads and paste)
641549-001	Optical Drive Hardware Kit (includes 2 bezels, bracket, optical drive cable, and screws)
641575-001	System board for use only with computer models equipped with an AMD processor, the 6470 chipset, and a graphics subsystem with discrete memory (includes 512-MB of discrete graphics subsystem memory and replacement thermal material)
641576-001	System board for use only with computer models equipped with an AMD processor, the 6650 chipset, and a graphics subsystem with discrete memory (includes 1024-MB of discrete graphics subsystem memory and replacement thermal material)
641577-001	System board for use only with computer models equipped with an AMD processor, the HM65 chipset, and a graphics subsystem with UMA memory (includes replacement thermal material)
641578-001	Thermal Material Kit for use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory (includes replacement thermal pads and paste)
641580-001	Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe for use only with computer models equipped with an AMD processor
641581-001	Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe for use only with computer models equipped with an AMD processor
641582-001	Display Screw Kit
641629-001	17.3-in, BrightView, HD+, LED, LVDS display panel
641672-001	320-GB, 7200-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
645193-001	320-GB, 5400-rpm hard drive (2.5-in, SATA, does not include bracket, connector cable, Mylar shield, or screws)
645384-001	System board for use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory (includes replacement thermal material)
645385-001	System board for use only with computer models equipped with an AMD processor, the 6490 chipset, and a graphics subsystem with discrete memory (includes 512-MB of discrete graphics subsystem memory and replacement thermal material)
645386-001	System board for use only with computer models equipped with an AMD processor, the 6750 chipset, and a graphics subsystem with discrete memory (includes 1024-MB of discrete graphics subsystem memory and replacement thermal material)
646434-001	USB board (does not include cable)
647270-001	Display lid switch board (includes cable)
647271-001	Bluetooth module cable (for use only with computer models equipped with an Intel processor)

4 Removal and replacement procedures

Preliminary replacement requirements


Tools required

You will need the following tools to complete the removal and replacement procedures:


- Flat-bladed screwdriver
- Magnetic screwdriver
- Phillips P0 and P1 screwdrivers

Service considerations


The following sections include some of the considerations that you must keep in mind during disassembly and assembly procedures.

 **NOTE:** As you remove each subassembly from the computer, place the subassembly (and all accompanying screws) away from the work area to prevent damage.

Plastic parts

 **CAUTION:** Using excessive force during disassembly and reassembly can damage plastic parts. Use care when handling the plastic parts. Apply pressure only at the points designated in the maintenance instructions.

Cables and connectors

 **CAUTION:** When servicing the computer, be sure that cables are placed in their proper locations during the reassembly process. Improper cable placement can damage the computer.

Cables must be handled with extreme care to avoid damage. Apply only the tension required to unseat or seat the cables during removal and insertion. Handle cables by the connector whenever possible. In all cases, avoid bending, twisting, or tearing cables. Be sure that cables are routed in such a way that they cannot be caught or snagged by parts being removed or replaced. Handle flex cables with extreme care; these cables tear easily.

Drive handling

⚠ CAUTION: Drives are fragile components that must be handled with care. To prevent damage to the computer, damage to a drive, or loss of information, observe these precautions:

Before removing or inserting a hard drive, shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.

Before handling a drive, be sure that you are discharged of static electricity. While handling a drive, avoid touching the connector.

Before removing a diskette drive or optical drive, be sure that a diskette or disc is not in the drive and be sure that the optical drive tray is closed.

Handle drives on surfaces covered with at least one inch of shock-proof foam.

Avoid dropping drives from any height onto any surface.

After removing a hard drive, an optical drive, or a diskette drive, place it in a static-proof bag.

Avoid exposing an internal hard drive to products that have magnetic fields, such as monitors or speakers.

Avoid exposing a drive to temperature extremes or liquids.

If a drive must be mailed, place the drive in a bubble pack mailer or other suitable form of protective packaging and label the package "FRAGILE."

Grounding guidelines

Electrostatic discharge damage

Electronic components are sensitive to electrostatic discharge (ESD). Circuitry design and structure determine the degree of sensitivity. Networks built into many integrated circuits provide some protection, but in many cases, ESD contains enough power to alter device parameters or melt silicon junctions.

A discharge of static electricity from a finger or other conductor can destroy static-sensitive devices or microcircuitry. Even if the spark is neither felt nor heard, damage may have occurred.

An electronic device exposed to ESD may not be affected at all and can work perfectly throughout a normal cycle. Or the device may function normally for a while, then degrade in the internal layers, reducing its life expectancy.

⚠ CAUTION: To prevent damage to the computer when you are removing or installing internal components, observe these precautions:

Keep components in their electrostatic-safe containers until you are ready to install them.

Before touching an electronic component, discharge static electricity by using the guidelines described in this section.

Avoid touching pins, leads, and circuitry. Handle electronic components as little as possible.

If you remove a component, place it in an electrostatic-safe container.

The following table shows how humidity affects the electrostatic voltage levels generated by different activities.

⚠ CAUTION: A product can be degraded by as little as 700 V.

Typical electrostatic voltage levels			
Event	Relative humidity		
	10%	40%	55%
Walking across carpet	35,000 V	15,000 V	7,500 V
Walking across vinyl floor	12,000 V	5,000 V	3,000 V
Motions of bench worker	6,000 V	800 V	400 V
Removing DIPS from plastic tube	2,000 V	700 V	400 V
Removing DIPS from vinyl tray	11,500 V	4,000 V	2,000 V
Removing DIPS from Styrofoam	14,500 V	5,000 V	3,500 V
Removing bubble pack from PCB	26,500 V	20,000 V	7,000 V
Packing PCBs in foam-lined box	21,000 V	11,000 V	5,000 V

Packaging and transporting guidelines

Follow these grounding guidelines when packaging and transporting equipment:

- To avoid hand contact, transport products in static-safe tubes, bags, or boxes.
- Protect ESD-sensitive parts and assemblies with conductive or approved containers or packaging.
- Keep ESD-sensitive parts in their containers until the parts arrive at static-free workstations.
- Place items on a grounded surface before removing items from their containers.
- Always be properly grounded when touching a component or assembly.
- Store reusable ESD-sensitive parts from assemblies in protective packaging or nonconductive foam.
- Use transporters and conveyors made of antistatic belts and roller bushings. Be sure that mechanized equipment used for moving materials is wired to ground and that proper materials are selected to avoid static charging. When grounding is not possible, use an ionizer to dissipate electric charges.

Workstation guidelines

Follow these grounding workstation guidelines:

- Cover the workstation with approved static-shielding material.
- Use a wrist strap connected to a properly grounded work surface and use properly grounded tools and equipment.
- Use conductive field service tools, such as cutters, screwdrivers, and vacuums.
- When fixtures must directly contact dissipative surfaces, use fixtures made only of static-safe materials.
- Keep the work area free of nonconductive materials, such as ordinary plastic assembly aids and Styrofoam.
- Handle ESD-sensitive components, parts, and assemblies by the case or PCM laminate. Handle these items only at static-free workstations.
- Avoid contact with pins, leads, or circuitry.
- Turn off power and input signals before inserting or removing connectors or test equipment.

Equipment guidelines

Grounding equipment must include either a wrist strap or a foot strap at a grounded workstation.

- When seated, wear a wrist strap connected to a grounded system. Wrist straps are flexible straps with a minimum of one megohm $\pm 10\%$ resistance in the ground cords. To provide proper ground, wear a strap snugly against the skin at all times. On grounded mats with banana-plug connectors, use alligator clips to connect a wrist strap.
- When standing, use foot straps and a grounded floor mat. Foot straps (heel, toe, or boot straps) can be used at standing workstations and are compatible with most types of shoes or boots. On conductive floors or dissipative floor mats, use foot straps on both feet with a minimum of one megohm resistance between the operator and ground. To be effective, the conductive must be worn in contact with the skin.

The following grounding equipment is recommended to prevent electrostatic damage:

- Antistatic tape
- Antistatic smocks, aprons, and sleeve protectors
- Conductive bins and other assembly or soldering aids
- Nonconductive foam
- Conductive tabletop workstations with ground cords of one megohm resistance
- Static-dissipative tables or floor mats with hard ties to the ground
- Field service kits
- Static awareness labels
- Material-handling packages
- Nonconductive plastic bags, tubes, or boxes
- Metal tote boxes
- Electrostatic voltage levels and protective materials

The following table lists the shielding protection provided by antistatic bags and floor mats.

Material	Use	Voltage protection level
Antistatic plastics	Bags	1,500 V
Carbon-loaded plastic	Floor mats	7,500 V
Metallized laminate	Floor mats	5,000 V


Component replacement procedures

This chapter provides removal and replacement procedures.

There are as many as 103 screws that must be removed, replaced, or loosened when servicing the computer. Make special note of each screw and screw lock size and location during removal and replacement.

Service tag

When ordering parts or requesting information, provide the computer serial number and model description provided on the service tag. [When ordering parts or requesting information, provide the computer serial number and model description provided on the service tag.]

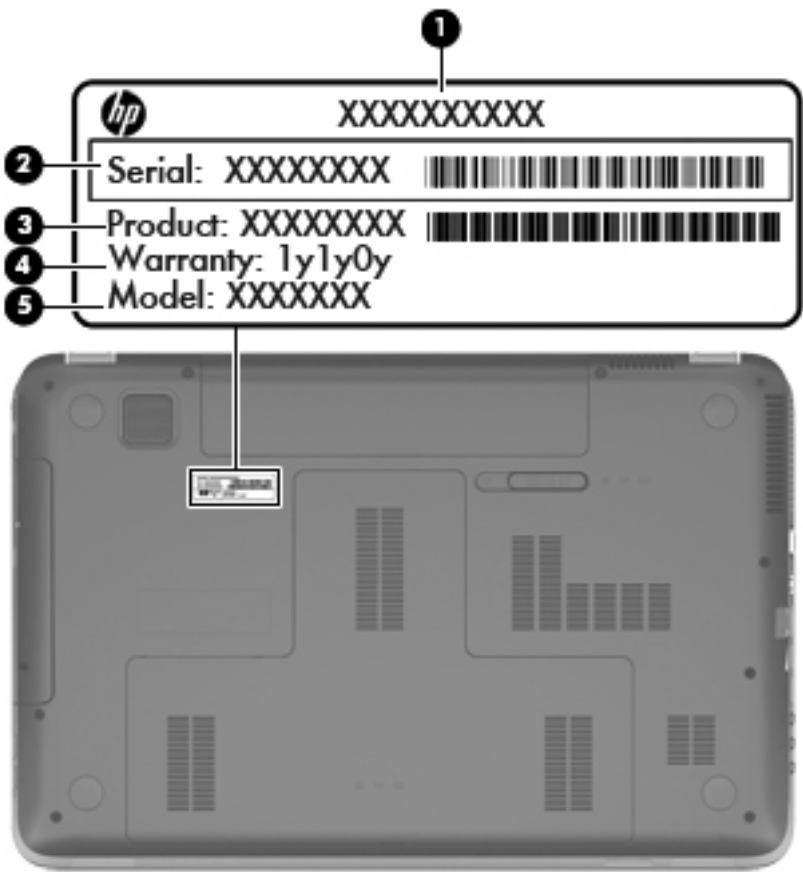


Item	Description	Function
(1)	Product name	This is the product name affixed to the front of the computer.
(2)	Serial number (s/n)	This is an alphanumeric identifier that is unique to each product.
(3)	Part number/Product number (p/n)	This number provides specific information about the product's hardware components. The part number helps a service technician to determine what components and parts are needed.

Item	Description	Function
(4)	Warranty period	This number describes the duration of the warranty period for the computer.
(5)	Model description	This is the alphanumeric identifier needed to locate documents, drivers, and support for the computer.

Computer feet

The computer feet are adhesive-backed rubber pads. There are 4 rubber feet that attach to the base enclosure in the locations illustrated below.

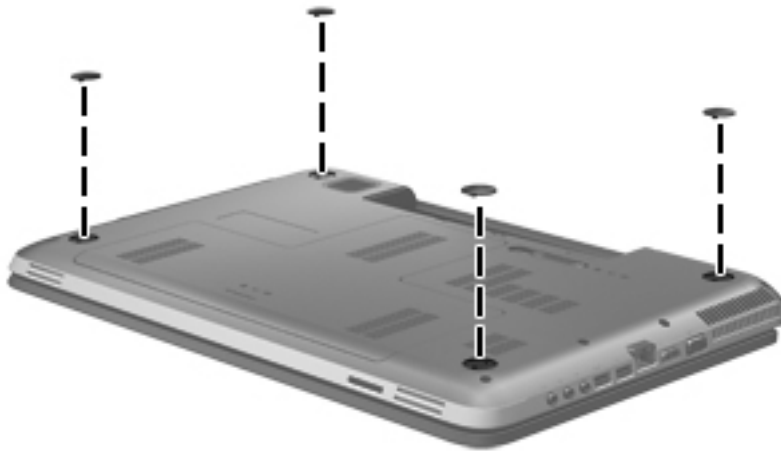

Battery


Description	Spare part number
9-cell, 100-WHr, 3.00-AHr, Li	636631-001
6-cell, 62-WHr, 2.80-AHr, Li	593562-001
6-cell, 55-WHr, 2.55-AHr, Li	593554-001

Before disassembling the computer, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.

Remove the battery:

1. Slide the release latch **(1)** to release the battery.
2. Pivot the front edge of the battery **(2)** up and back.
3. Remove the battery **(3)** from the computer.

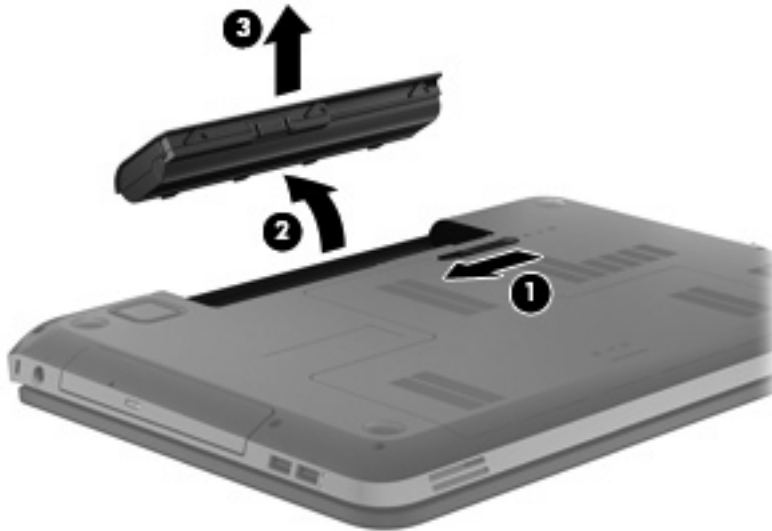

To insert the battery:

1. Align the tabs on the rear edge of the battery with the notches on the rear edge of the battery bay.
2. Pivot the front edge of the battery down into the battery bay until it is seated. (The battery release latch will automatically lock into place.)

Optical drive



NOTE: The optical drive spare part kit includes a bezel and bracket.

Description	Spare part number
For use only with computer models equipped with an AMD processor:	
Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641850-001
DVD±RW Double-Layer LightScribe SuperMulti Drive	641851-001
For use only with computer models equipped with an Intel processor:	
Blu-ray Disc ROM with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641302-001
Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe	641303-001
DVD±RW Double-Layer LightScribe SuperMulti Drive	641301-001
Optical Drive Hardware Kit (includes bracket, optical drive cable, bezels (2), and screws	641549-001

Before removing the optical drive, follow these steps:


1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)).

Remove the optical drive:

1. Slide the release latch **(1)** to release the service cover from the computer.
2. Lift the rear edge of the service cover **(2)** up and forward until it rests at an angle.




3. Remove the service cover. The service cover is available in the Plastics Kit, spare part number 641305-001.
4. Remove the Phillips PM2.5×5.0 screw that secures the optical drive to the computer.

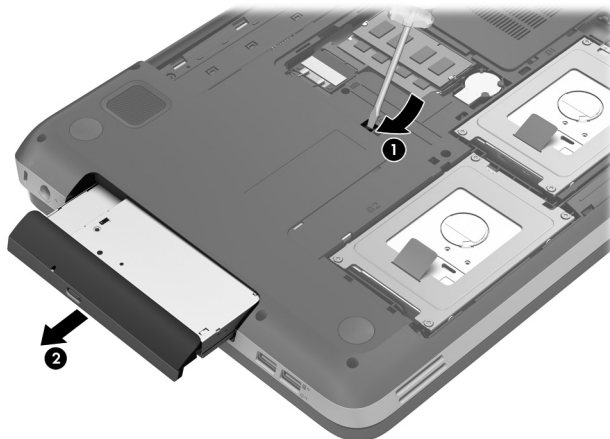

5. Push on the hard drive bracket **(1)** to release the optical drive.

6. Remove the optical drive **(2)** from the computer.

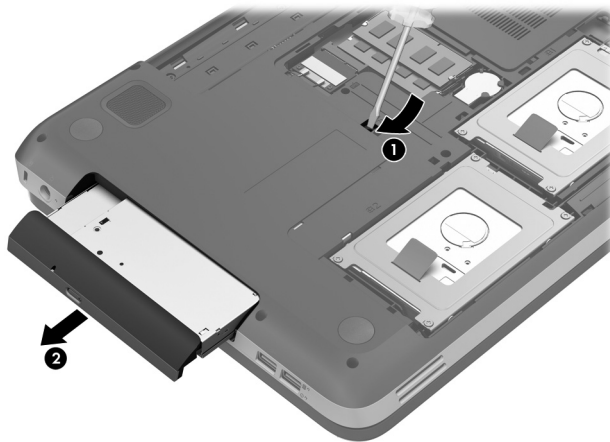



7. If it is necessary to replace the optical drive bracket, position the optical drive with the rear panel toward you.
8. Remove the two Phillips PM2.0x4.0 screws **(1)** that secure the bracket to the optical drive.
9. Remove the optical drive bracket **(2)**. The optical drive bracket is included in the Optical Drive Hardware Kit, spare part number 641549-001.



Reverse this procedure to reassemble and install the optical drive.

Hard drive

 **NOTE:** The hard drive spare part kit does not include the bracket, connector cable, Mylar shield, or screws. The bracket, connector cable, Mylar shield, and screws are included in the Hard Drive Hardware Kit, spare part number 641306-001.


 **NOTE:** The computer can be equipped with up to two hard drives. The primary hard drive is installed in the right hard drive bay. The secondary hard drive is installed in the left hard drive bay.

Description	Spare part number
1-TB, 5400-rpm	638974-001
750-GB, 7200-rpm	633252-001
750-GB, 5400-rpm	634250-001
640-GB, 7200-rpm	621046-001
640-GB, 5400-rpm	603785-001
500-GB, 7200-rpm for use only with computer models equipped with an AMD processor	634919-001
500-GB, 7200-rpm for use only with computer models equipped with an Intel processor	608218-001
320-GB, 7200-rpm	634862-001 and 641672-001
320-GB, 5400-rpm	622643-001 and 645193-001
250-GB, 7200-rpm	634861-001 and 635225-001
Hard Drive Hardware Kit (includes bracket, connector cable, Mylar shield, and screws)	641306-001
160-GB solid-state drive (does not include bracket, connector cable, Mylar shield, or screws)	639405-001


Before removing a hard drive, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)).
5. Remove the service cover (see [Optical drive on page 46](#)).


Remove the hard drive:

 **NOTE:** Steps 1 through 3 apply to the primary hard drive. See steps 4 through 7 for secondary hard drive removal information.

1. Disconnect the hard drive cable **(1)** from the system board.
2. Remove the four Phillips PM2.5×5.0 screws **(2)** that secure the hard drive to the computer.
3. Remove the hard drive **(3)**.

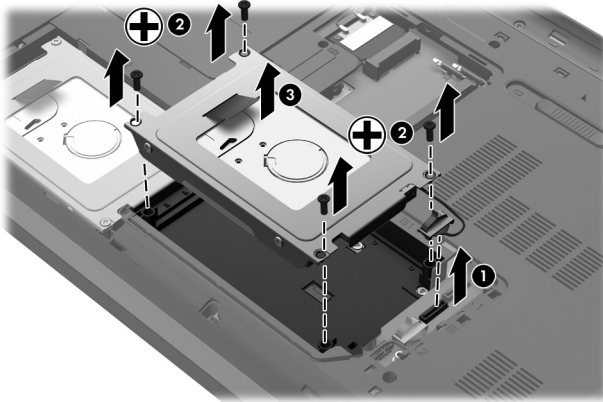



4. Disconnect the hard drive cable **(1)** from the system board.
5. Release the hard drive cable **(2)** from the routing channel built into the base enclosure.
6. Remove the four Phillips PM2.5×5.0 screws **(3)** that secure the hard drive to the computer.
7. Remove the hard drive **(4)**.

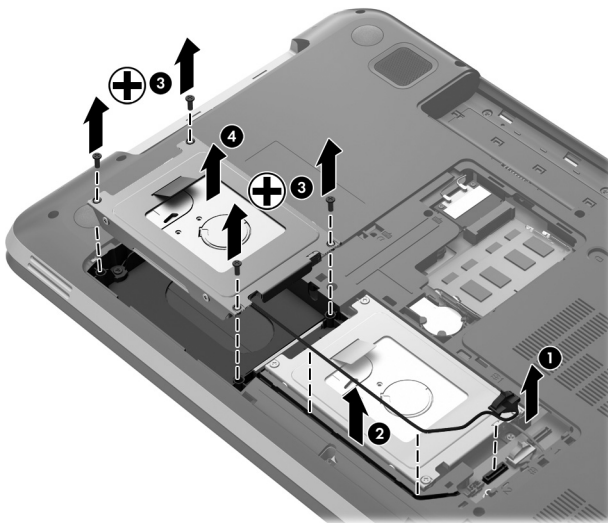

8. If it is necessary to replace the hard drive bracket or hard drive connector cable:
 - a. Remove the four Phillips PM3.0×4.0 screws **(1)** that secure the hard drive bracket to the hard drive.
 - b. Remove the hard drive bracket **(2)** from the hard drive.

- c. Disconnect the hard drive connector cable **(3)** from the hard drive.

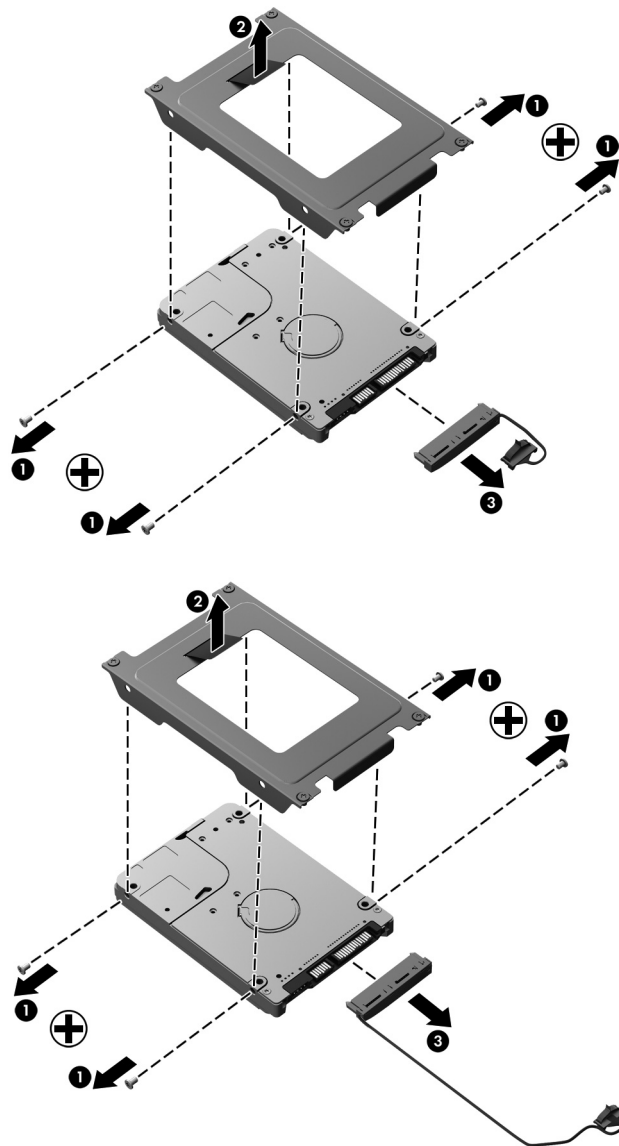

 **NOTE:** The hard drive connector cable used on the secondary hard drive has a longer cable.

Reverse this procedure to reassemble and install the mass storage device.

RTC battery


Description	Spare part number
RTC battery (includes cable and double-sided tape)	640902-001

Before removing the RTC battery, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)).
5. Remove the service cover (see [Optical drive on page 46](#)).


Remove the RTC battery:

1. Disconnect the RTC battery cable **(1)** from the system board.
2. Release the clips **(2)** built into the base enclosure that secure the RTC battery.
3. Remove the RTC battery **(3)**. (The RTC battery is attached to the base enclosure with double-sided tape.)

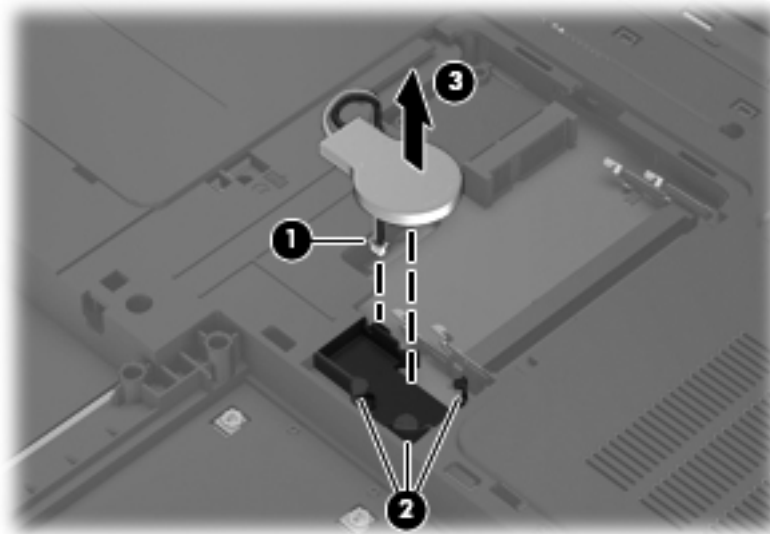

Reverse this procedure to install the RTC battery.

Memory module

 **NOTE:** The computer can be equipped with up to two memory modules. The primary memory module is installed in the memory module socket closest to the system board. The expansion memory module is installed in the memory module socket farthest from the system board.


Description	Spare part number
4 GB (DDR3, 10600, 1333-MHz)	621569-001
2 GB (DDR3, 10600, 1333-MHz)	621565-001
1 GB (DDR3, 10600, 1333-MHz)	639736-001

Before removing a memory module, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)).
5. Remove the service cover (see [Optical drive on page 46](#)).

Remove the memory module:

1. Spread the retaining tabs **(1)** on each side of the memory module slot to release the memory module. (The memory module tilts up.)
2. Remove the memory module **(2)** by pulling it away from the slot at an angle.

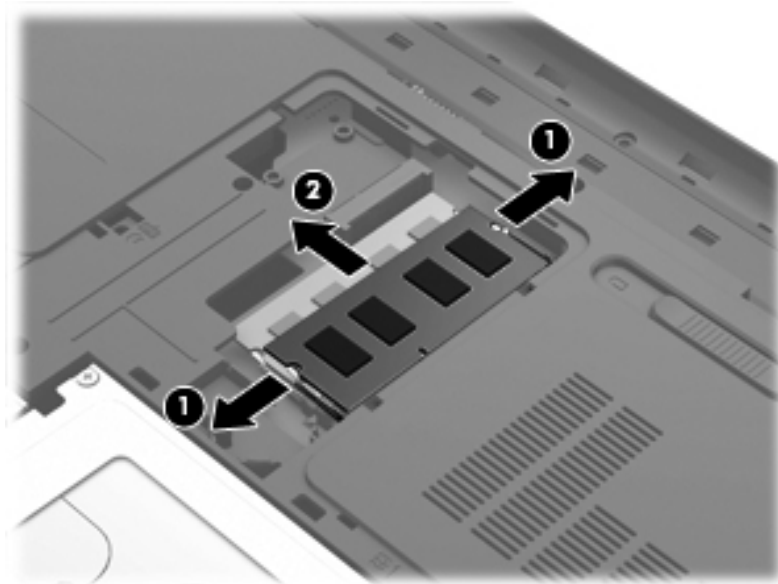

Reverse this procedure to install a memory module.

WLAN module

Description	Spare part number
For use with all computer models:	
Broadcom 4313 802.11B/G/N 1×1 WiFi Adapter	593836-001
Broadcom 4313 802.11B/G/N 1×1 WiFi and 2070 Bluetooth 2.1+EDR Combo adapter (BT3.0HS ready)	600370-001
Ralink RT3090BC4 802.11B/G/N 1×1 WiFi and Bluetooth 2.1+EDR Combo adapter (BT3.0HS ready)	630705-001
Ralink 5390GN 802.11B/G/N 1×1 WiFi Adapter	630703-001
For use only with computer models equipped with an AMD processor:	
Atheros 9285G 802.11B/G/N 1×1 WiFi Adapter	518436-001
Realtek 8188GN 802.11b/g/n 1x1 WiFi Adapter	640926-001
Atheros AR9002WB-1NGB 802.11B/G/N 1×1 WiFi and Bluetooth 2.1EDR+ Combo Adapter (BT3.0+HS ready)	593127-001
Realtek 8188BC8 802.11a/b/g/n 2x2 WiFi and Bluetooth 3.0+HS Combo Adapter	602993-001
For use only with computer models equipped with an Intel processor:	
Intel Centrino Advanced-N 6230	631956-001
Intel Centrino Wireless-N 1000 WLAN module	572520-001
Intel Centrino Wireless-N + WiMAX 6150	633817-001


⚠ CAUTION: To prevent an unresponsive system, replace the wireless module only with a wireless module authorized for use in the computer by the governmental agency that regulates wireless devices in your country or region. If you replace the module and then receive a warning message, remove the module to restore device functionality, and then contact technical support.


Before removing the WLAN module, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)).
5. Remove the service cover (see [Optical drive on page 46](#)).


Remove the WLAN module:

1. Disconnect the WLAN antenna cables from the terminals on the WLAN module.


 **NOTE:** The #1 WLAN antenna cable is connected to the WLAN module Main terminal. The #2 WLAN antenna cable is connected to the WLAN module Aux terminal.

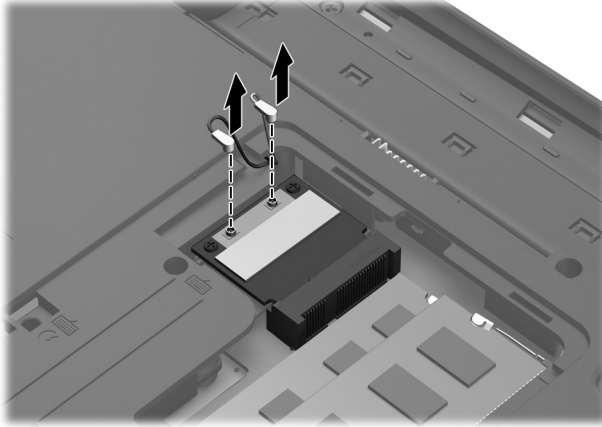


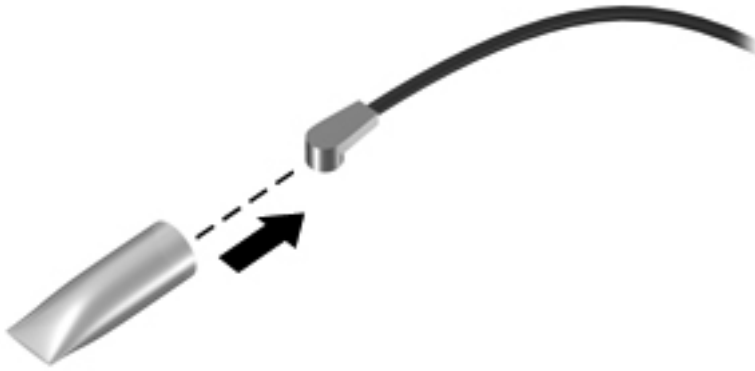
2. Remove the two Phillips PM2.0x4.0 screws that secure the WLAN module to the system board. (The WLAN module tilts up.)

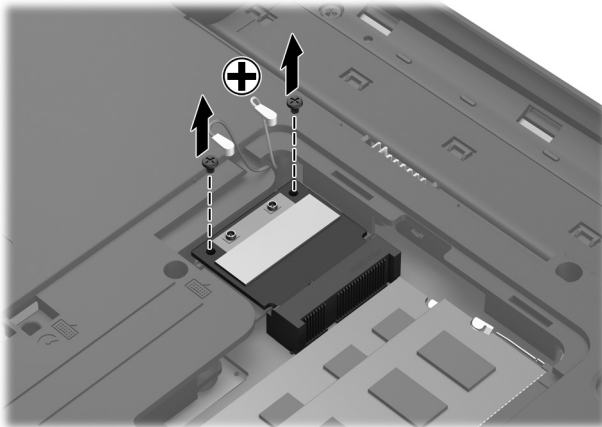

3. Remove the WLAN module by pulling the module away from the slot at an angle.

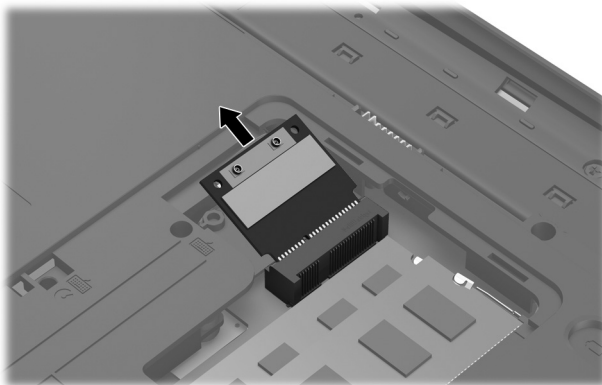


 **NOTE:** If the WLAN antennas are not connected to the terminals on the WLAN module, the protective sleeves must be installed on the antenna connectors, as shown in the following illustration.



Reverse this procedure to install the WLAN module.

Keyboard

 **NOTE:** The keyboard spare part kit includes a keyboard cable.


Description	Spare part number	Description	Spare part number
For use with all computer models:		For use in Italy	639396-061
For use in Belgium	639396-A41	For use in the Netherlands	639396-B31
For use in Canada	639396-121	For use in Portugal	639396-131
For use in the Czech Republic	639396-221	For use in Russia	639396-251
For use in Denmark, Finland, and Norway	639396-DH1	For use in Slovenia	639396-BA1
For use in France	639396-051	For use in Spain	639396-071
For use in Germany	639396-041	For use in Switzerland	639396-BG1
For use in Greece	639396-DJ1	For use in the United Kingdom and Singapore	639396-031
For use in Hungary	639396-211	For use in the United States	639396-001
For use only with computer models equipped with an Intel processor:		For use in South Korea	639396-AD1
For use in Israel	639396-BB1	For use in Taiwan	639396-AB1
For use in Japan	639396-291	For use in Thailand	639396-281
For use in Saudi Arabia	639396-171	For use in Turkey	639396-141

Before removing the keyboard, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)).
5. Remove the optical drive (see [Optical drive on page 46](#)).


Remove the keyboard:

1. Remove the two Phillips PM2.5×5.0 screws that secure the keyboard to the computer.

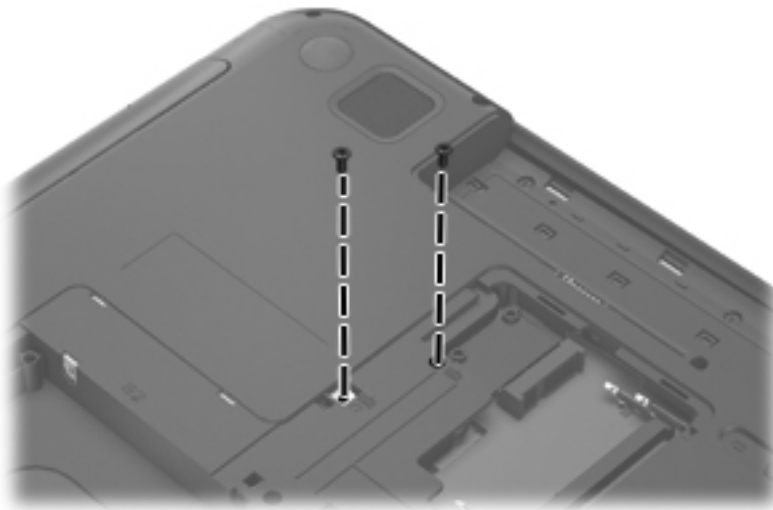

2. Rest the computer on its right side.
3. Open the computer.


4. Insert a screw driver or similar thin tool into the keyboard screw hole, and then press on the back of the keyboard until the keyboard disengages from the computer.

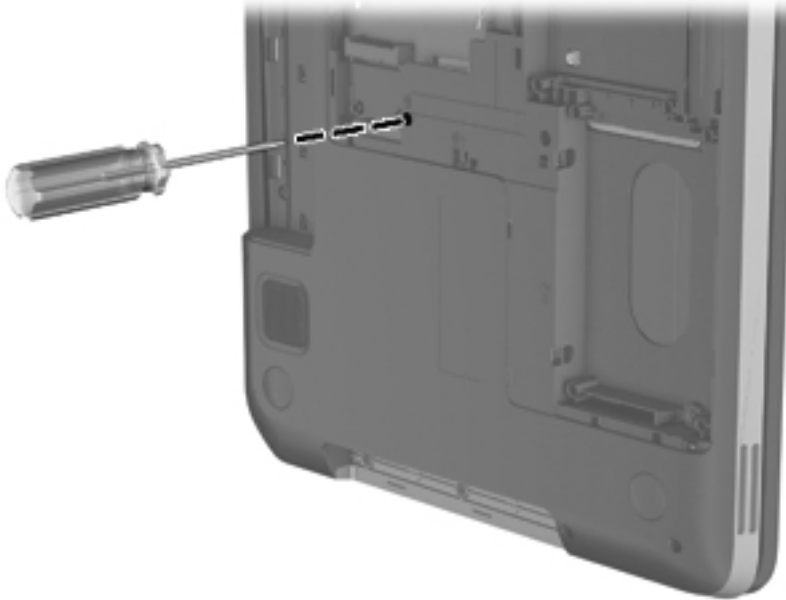

5. Turn the computer right-side up with the front toward you.
6. Lift the rear edge of the keyboard (1), and then slide the keyboard (2) back until the keyboard cable connector is accessible.



7. Release the zero insertion force (ZIF) connector **(1)** to which the keyboard cable is attached, and then disconnect the keyboard cable **(2)** from the system board.

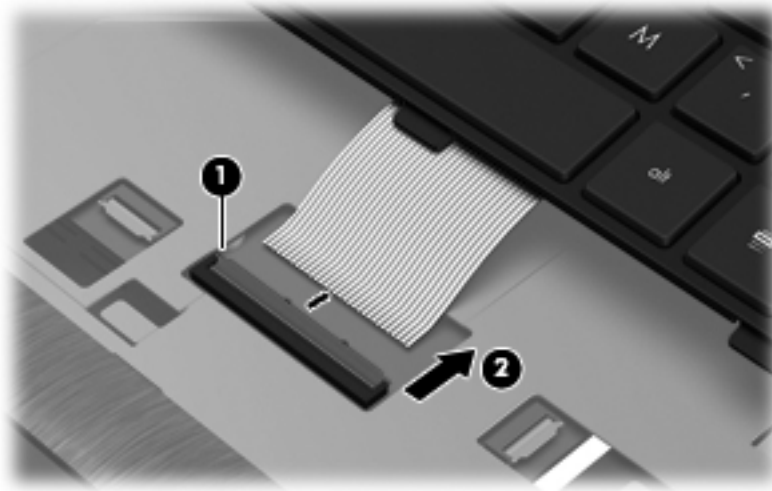

8. Remove the keyboard.

Reverse this procedure to install the keyboard.

Top cover

Description	Spare part number
Top cover (includes TouchPad and TouchPad cable and TouchPad button board and TouchPad button board cable)	639388-001

Before removing the top cover, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))


When replacing the top cover, be sure that the following components are removed from the defective top cover and installed on the replacement top cover:

- Fingerprint reader board and cable (see [Fingerprint reader board on page 64](#))
- Power button board and cable (see [Power button board on page 66](#))
- Display lid switch board and cable (see [Display lid switch board on page 68](#))

Remove the top cover:


1. Close the computer.
2. Turn the computer upside down, with the front toward you.

3. Remove the eight Phillips PM2.5×5.0 screws that secure the top cover to the computer.

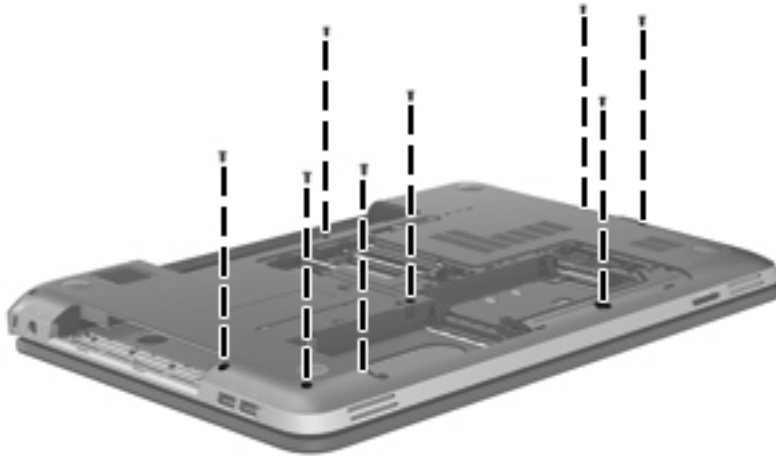

4. Remove the following screws:


- (1) One Phillips PM2.5×7.0 screw in the rear left corner of the base enclosure
- (2) Three Phillips PM2.5×3.0 screws in the optical drive bay
- (3) Two Phillips PM2.5×9.0 screws on the right side of the base enclosure

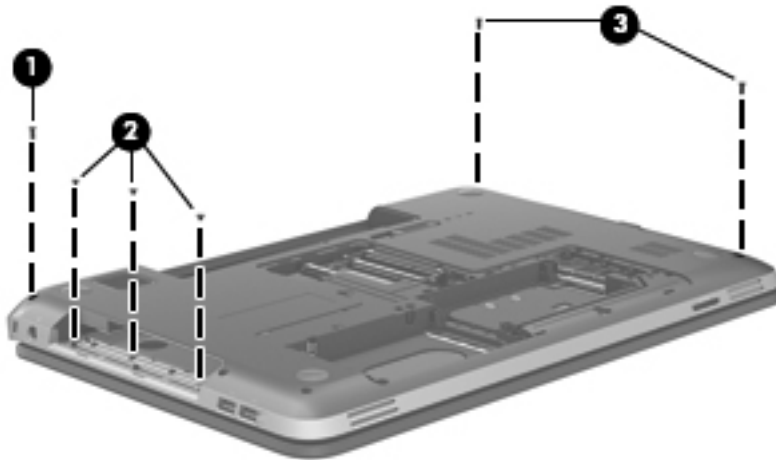


5. Turn the computer right-side up, with the front toward you.
6. Open the computer.


7. Release the ZIF connectors to which the following cables are attached, and then disconnect the cables from the system board:

- (1) Power button board cable
- (2) TouchPad button board cable
- (3) Fingerprint reader board cable
- (4) USB board cable

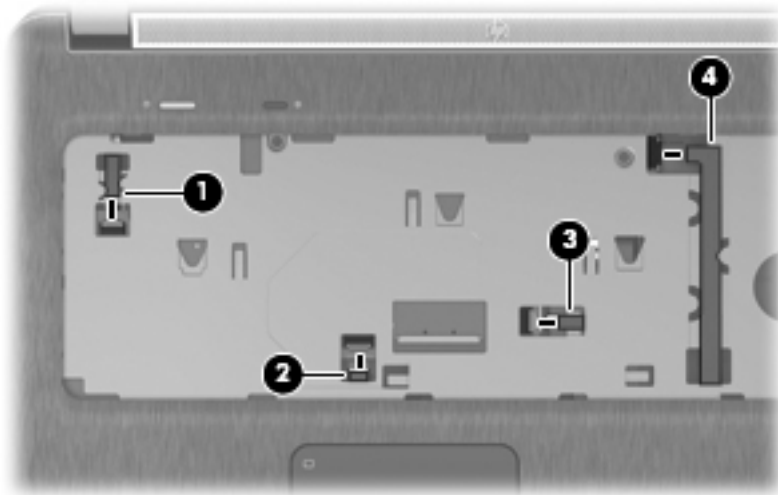


8. Remove the two Phillips PM2.5×5.0 screws that secure the top cover to the computer.

 **NOTE:** As you prepare to release the top cover, make sure the USB board (2) cable feeds freely through the opening (3) in the top cover.

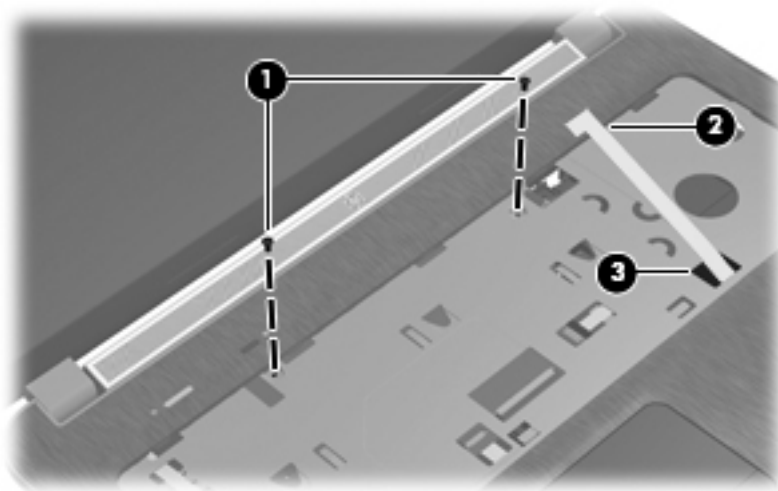

9. Lift the rear edge of the top cover (1) until the left and right sides disengage from the base enclosure.

10. Remove the top cover **(2)**.

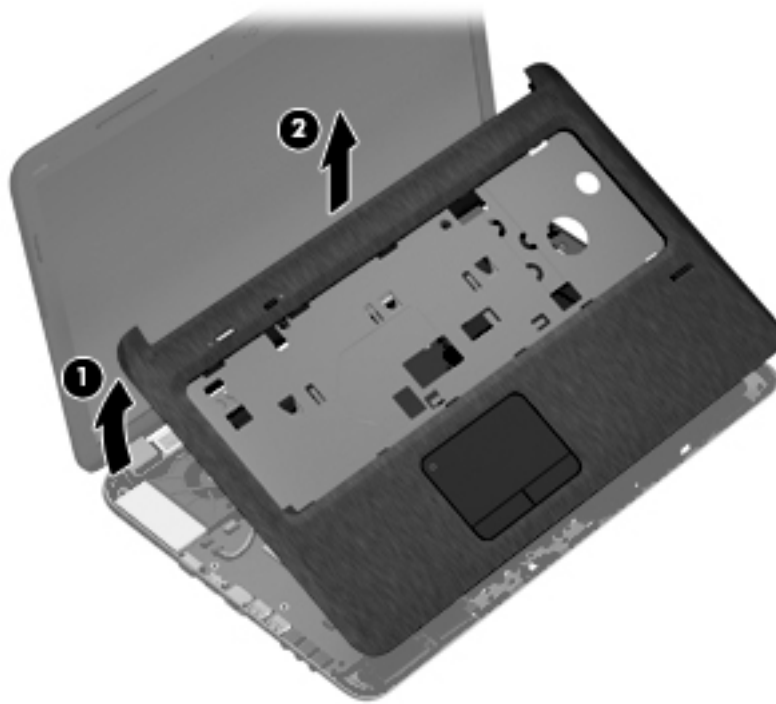

Reverse this procedure to install the top cover.

Fingerprint reader board



NOTE: The fingerprint reader board does not include the fingerprint reader board cable. The fingerprint reader board cable is included in the Cable Kit, spare part number 639402-001.

Description	Spare part number
Fingerprint reader board (includes bracket)	640427-001


Before removing the fingerprint reader board, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))

Remove the fingerprint reader board, bracket, and cable:

1. Turn the top cover upside down, with the front toward you.
2. Release the fingerprint reader board cable **(1)** from the surface of the top cover. Remove the two Phillips PM2.0×2.0 screws **(2)** that secure the fingerprint reader board and bracket to the top cover.

3. Remove the fingerprint reader board bracket **(3)**, board **(4)**, and cable.

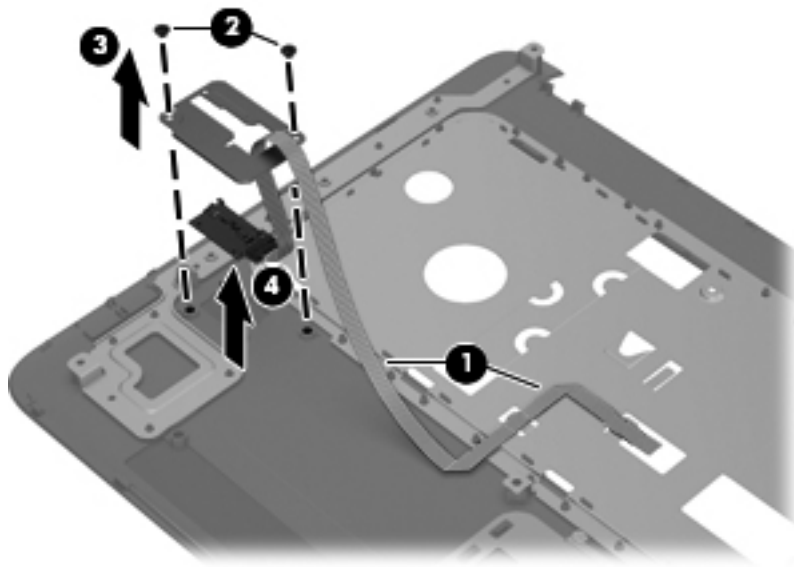

Reverse this procedure to install the fingerprint reader board, bracket, and cable.

Power button board



NOTE: The power button board does not include the power button board cable. The power button board cable is included in the Cable Kit, spare part number 639402-001.

Description	Spare part number
Power button board	640898-001


Before removing the power button board, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))

Remove the power button board:

1. Turn the top cover upside down, with the front toward you.
2. Release the power button board cable from the tab **(1)** on the top cover.
3. Disconnect the display lid switch board cable **(2)** from the power button board.
4. Remove the two Phillips PM2.0×4.0 screws **(3)** that secure the power button board to the top cover.

5. Remove the power button board and cable (4).

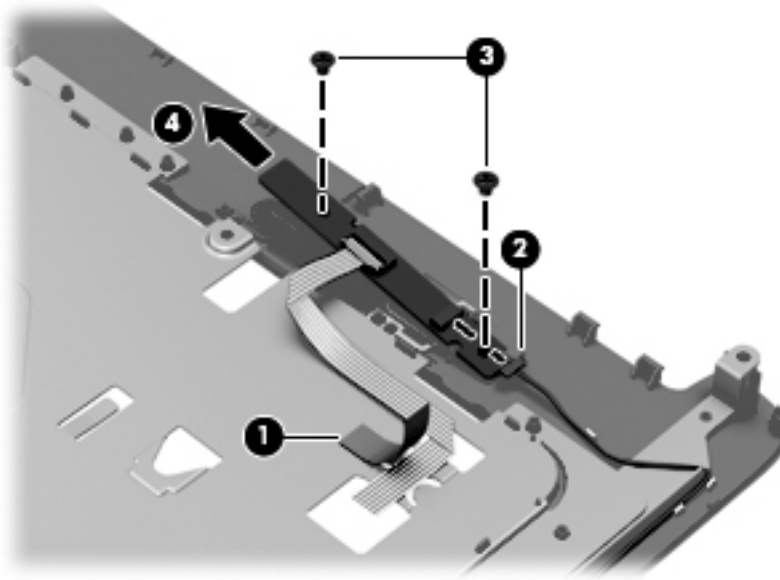

Reverse this procedure to install the power button board.

Display lid switch board

Description	Spare part number
Display lid switch board (includes cable)	647270-001


Before removing the display lid switch board, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))

Remove the display lid switch board:

1. Turn the top cover upside down, with the front toward you.
2. Disconnect the display lid switch cable **(1)** from the power button board.
3. Release the display lid switch board cable from the clips **(2)** built into the top cover.

4. Release the display lid switch board from the clips **(3)** built into the top cover.

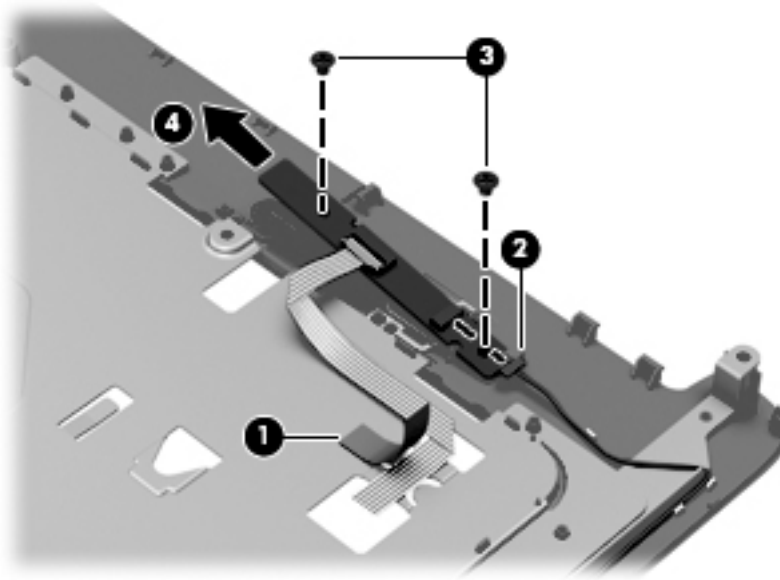

5. Remove the display lid switch board and cable.

Reverse this procedure to install the display lid switch board and cable.

SD Card reader board



NOTE: The SD Card reader board does not include the SD Card reader board cable. The SD Card reader board cable is included in the Cable Kit, spare part number 639402-001.

Description	Spare part number
SD Card reader board	640899-001


Before removing the SD Card reader board, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))

Remove the SD Card reader board and cable:

1. Release the ZIF connector to which the SD Card reader board cable is connected, and then disconnect the SD Card reader board cable **(1)** from the system board.
2. Remove the two Phillips PM2.5×5.0 screws **(2)** that secure the SD Card reader board to the base enclosure.

3. Remove the SD Card reader board **(3)** and cable.

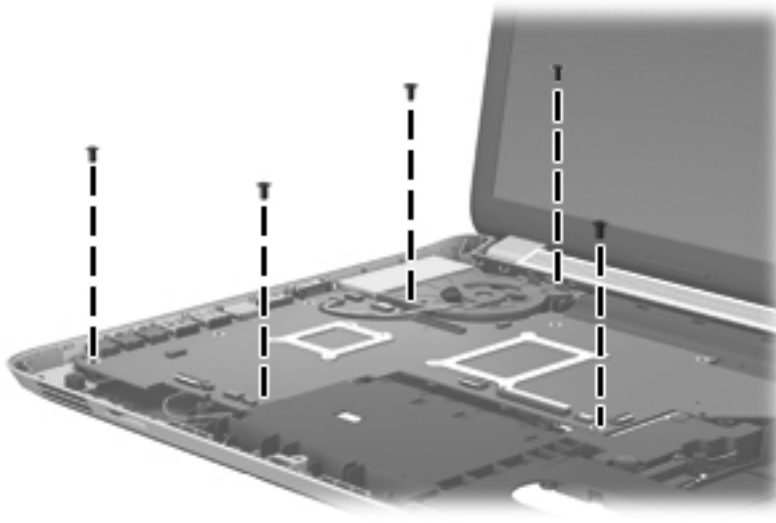

Reverse this procedure to install the SD Card reader board and cable.

Bluetooth module



NOTE: This section applies only to computer models equipped with an Intel processor.



NOTE: The Bluetooth module does not include the Bluetooth module cable. The Bluetooth module cable is available using spare part number 647271-001.

Description	Spare part number
Bluetooth module	537921-001


Before removing the Bluetooth module and cable, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))


Remove the Bluetooth module and cable:

1. Disconnect the Bluetooth module cable **(1)** from the system board.
2. Release the Bluetooth module cable **(2)** from the clips built into the speaker and base enclosure.

3. Release the Bluetooth module **(3)** from the clip built into the base enclosure.

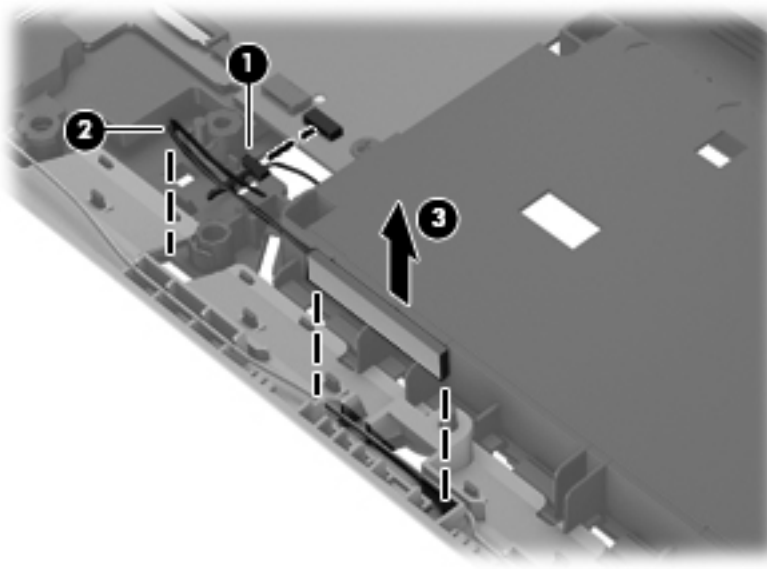

4. Remove the Bluetooth module and cable.
5. If it is necessary to replace the Bluetooth module cable, disconnect the cable from the Bluetooth module.

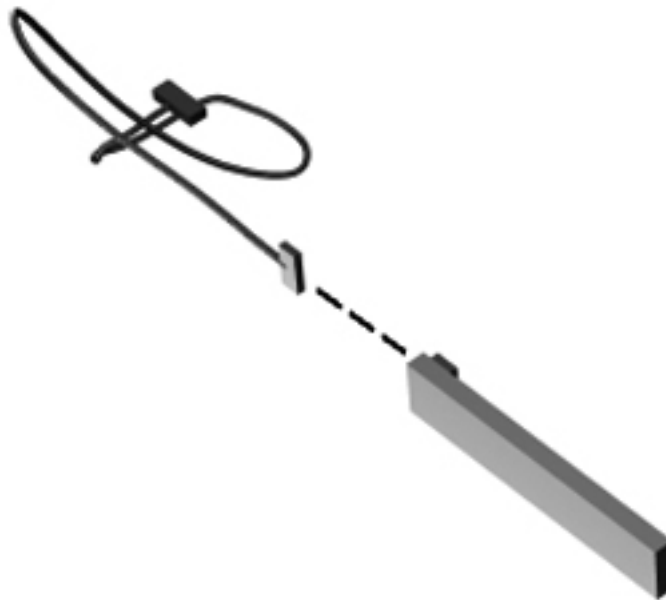

Reverse this procedure to install the Bluetooth module and cable.

USB board



NOTE: The USB board does not include the USB board cable. The USB board cable is included in the Cable Kit, spare part number 639402-001.

Description	Spare part number
USB board	646434-001


Before removing the USB board, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))

Remove the USB board:

1. Detach the USB board cable **(1)** from the base enclosure. (The USB board cable is attached to the base enclosure with double-sided tape.)
2. Remove the two Phillips PM2.5×5.0 screws **(2)** that secure the USB board to the base enclosure.

3. Remove the USB board **(3)** and cable.

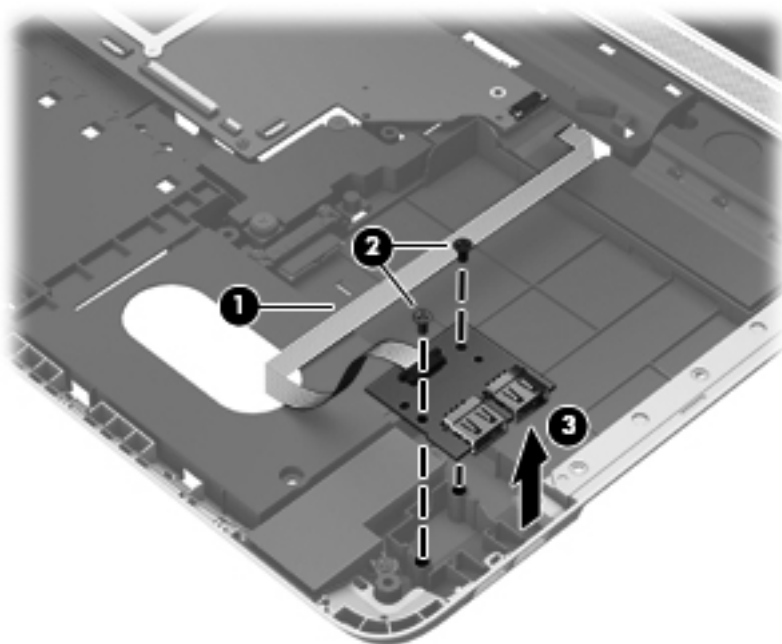

Reverse this procedure to install the USB board and cable.

Front speakers

Description	Spare part number
Front speakers (includes front left and right speakers and cables)	639394-001


Before removing the front speakers, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))
 - USB board (see [USB board on page 74](#))


Remove the front speakers and cables:

1. Disconnect the front speaker cable **(1)** from the system board.
2. Release the front speaker cable from the clips **(2)** and routing channel built into the base enclosure.

3. Remove the two Phillips PM2.5×5.0 screws **(3)** that secure the front right speaker to the base enclosure.

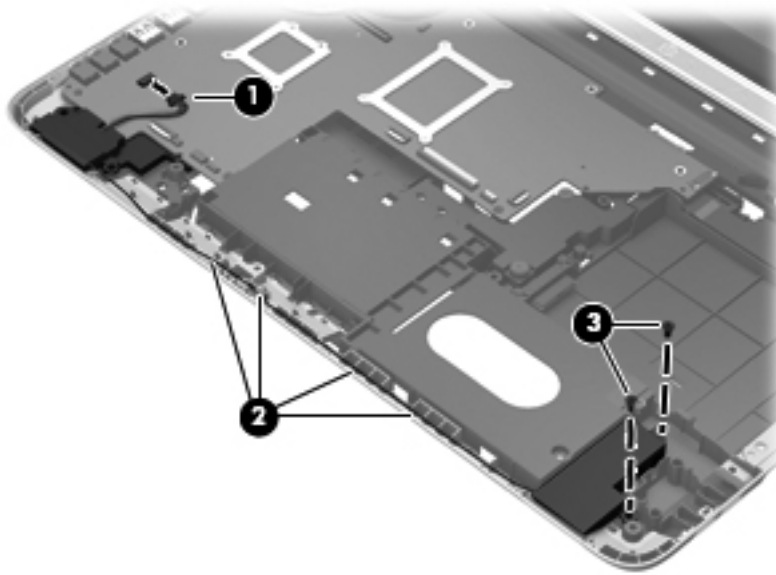


4. Rotate the front left speaker **(1)** clockwise to release it from under the system board.
5. Remove the front left speaker **(2)**.
6. Remove the front right speaker **(3)**.

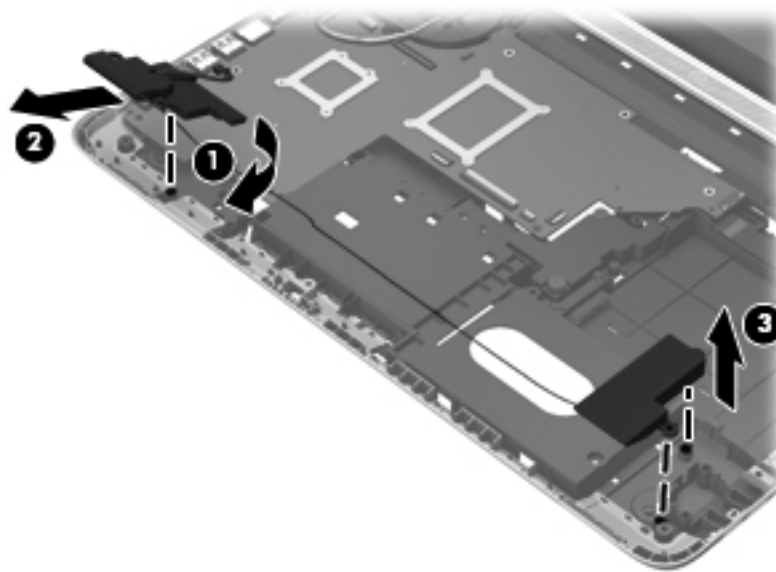

Reverse this procedure to install the front speakers and cables.

Power connector cable


 **NOTE:** The power connector cable is included in the Cable Kit, spare part number 639402-001.

Before removing the power connector cable, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))

Remove the power connector cable:

1. Release the power connector cable from the clips **(1)** built into the base enclosure.
2. Disconnect the power connector cable **(2)** from the system board.
3. Remove the two Phillips PM2.0×4.0 screws **(3)** that secure the power connector to the base enclosure.
4. Remove the power connector **(4)** from the base enclosure.

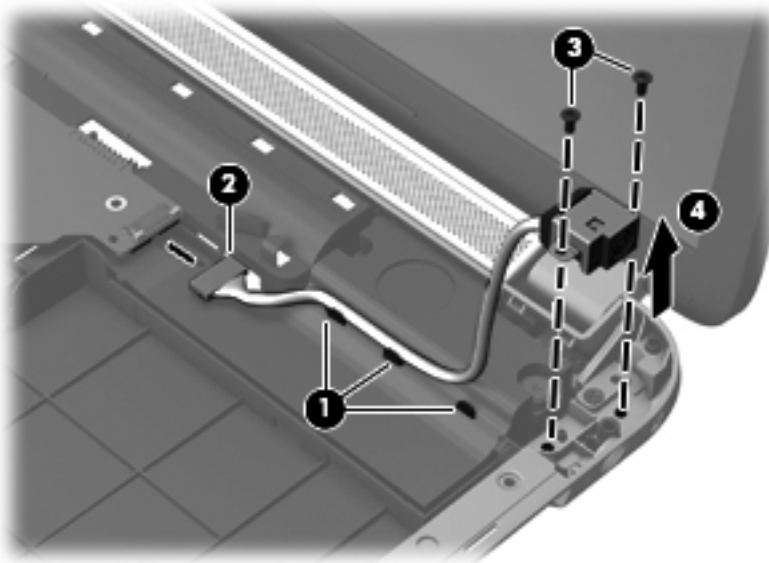

Reverse this procedure to install the power connector cable.

System board



NOTE: The system board spare part kit includes replacement thermal material.

Description	Spare part number
For use only with computer models equipped with an AMD processor:	
System board for use only with computer models equipped with the 6750 chipset and a graphics subsystem with discrete memory (includes 1024-MB of discrete graphics subsystem memory)	645386-001
System board for use only with computer models equipped with the 6650 chipset and a graphics subsystem with discrete memory (includes 1024-MB of discrete graphics subsystem memory)	641576-001
System board for use only with computer models equipped with the 6490 chipset and a graphics subsystem with discrete memory (includes 512-MB of discrete graphics subsystem memory)	645385-001
System board for use only with computer models equipped with the 6470 chipset and a graphics subsystem with discrete memory (includes 512-MB of discrete graphics subsystem memory)	641575-001
System board for use only with computer models equipped with the HM65 chipset and a graphics subsystem with UMA memory (includes replacement thermal material)	641577-001
System board for use only with computer models equipped with a graphics subsystem with UMA memory (includes replacement thermal material)	645384-001
For use only with computer models equipped with an Intel processor:	
For use only with computer models equipped with the 6770 chipset and an Intel Quad Core processor (includes 1024-MB of discrete graphics subsystem memory)	639391-001
For use only with computer models equipped with the 6770 chipset and an Intel Dual Core processor (includes 1024-MB of discrete graphics subsystem memory)	639392-001
For use only with computer models equipped with the 6490 chipset and an Intel Quad Core processor (includes 1024-MB of discrete graphics subsystem memory)	639389-001
For use only with computer models equipped with the 6490 chipset and an Intel Dual Core processor (includes 1024-MB of discrete graphics subsystem memory)	639390-001
Thermal Material Kit (includes replacement thermal pads and paste):	
For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	640457-001
For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	640456-001
For use only with computer models equipped with an Intel processor	641493-001

Before removing the system board, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.


3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - WLAN module (see [WLAN module on page 54](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))

When replacing the system board, be sure that the following components are removed from the defective system board and installed on the replacement system board:

- Memory module (see [Memory module on page 53](#))
- RTC battery (see [RTC battery on page 52](#))
- Fan and heat sink (see [Fan/heat sink assembly on page 82](#))
- Processor (see [Processor on page 86](#))

Remove the system board:


1. Close the computer.
2. Turn the computer upside down, with the front toward you.
3. Disconnect the rear speaker cable **(1)** and the optical drive cable **(2)** from the system board.

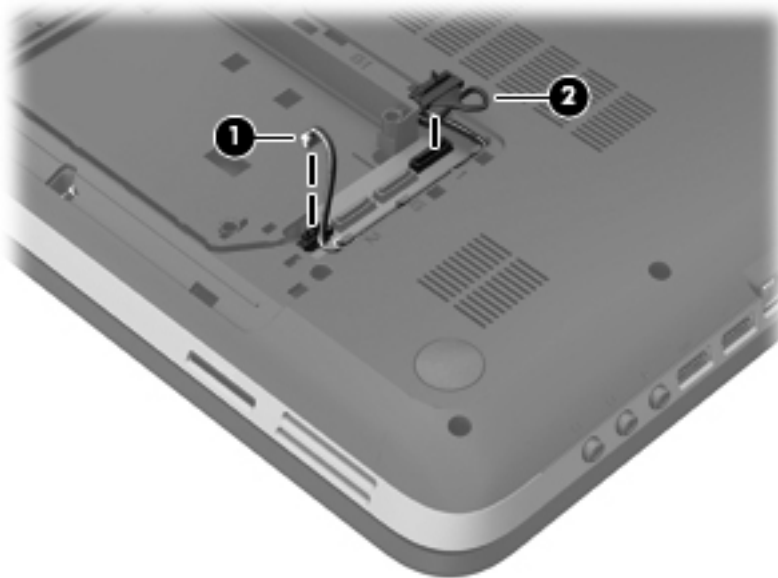


4. Turn the computer right side up, with the front toward you.
5. Open the computer.

6. Disconnect the following cables from the system board:

- (1) Display panel cable
- (2) Webcam/microphone cable
- (3) Subwoofer cable
- (4) Power connector cable

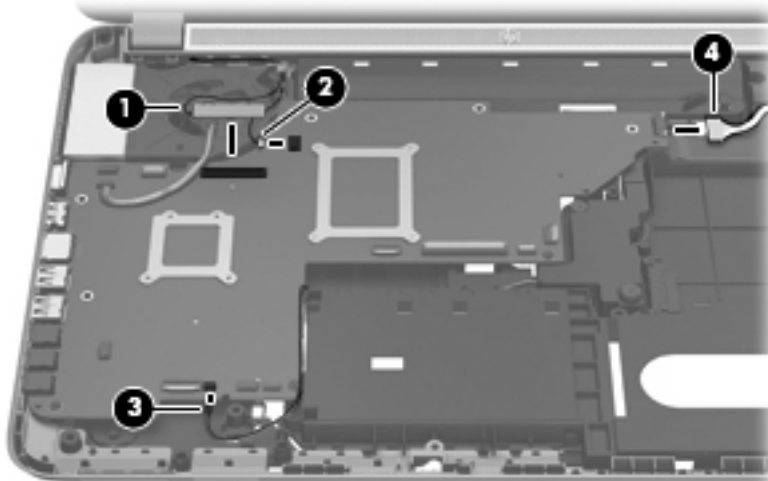


7. Remove the five Phillips PM2.5×5.0 screws that secure the system board to the base enclosure.

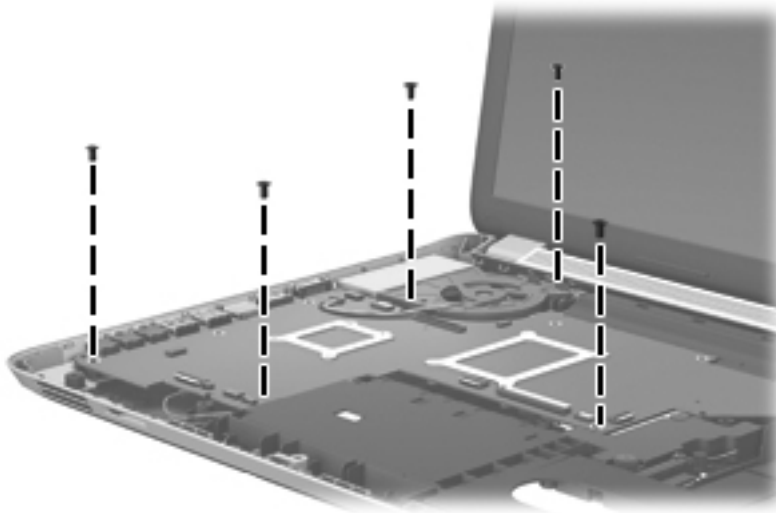


8. Flex the left side (1) of the base enclosure outward to allow the audio connectors (2) to clear the openings in the base enclosure.
9. Lift the front edge of the system board (3) until it rests at an angle.

10. Remove the system board (4) by sliding it up and forward at an angle.

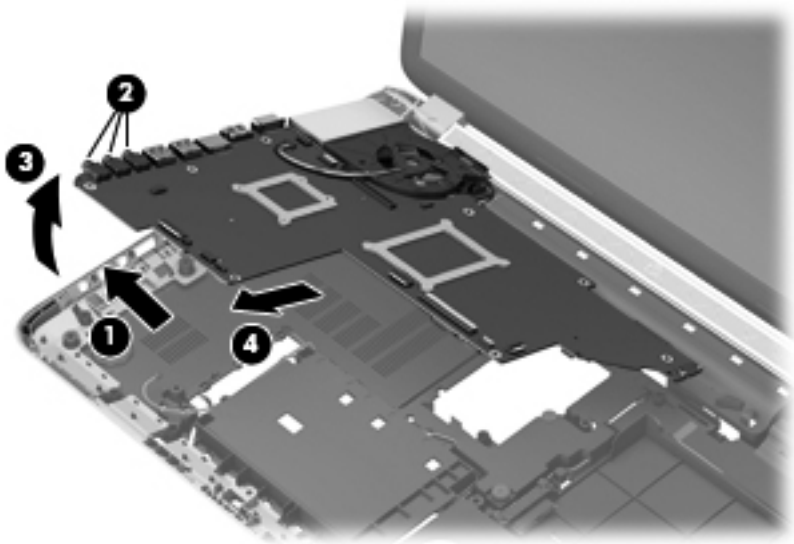


Reverse this procedure to install the system board.

Fan/heat sink assembly

 **NOTE:** The fan/heat sink assembly spare part kit includes replacement thermal material.

Description	Spare part number
For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	641578-001
For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	639404-001
For use only with computer models equipped with an Intel processor	640903-001
Thermal Material Kit (includes replacement thermal pads and paste):	
For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	640457-001
For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	640456-001
For use only with computer models equipped with an Intel processor	641493-001


 **NOTE:** To properly ventilate the computer, allow at least 7.6 cm (3 in) of clearance on the left side of the computer. The computer uses an electric fan for ventilation. The fan is controlled by a temperature sensor and is designed to turn on automatically when high temperature conditions exist. These conditions are affected by high external temperatures, system power consumption, power management/battery conservation configurations, battery fast charging, and software requirements. Exhaust air is displaced through the ventilation grill located on the left side of the computer.

Before removing the fan/heat sink assembly, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - WLAN module (see [WLAN module on page 54](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))
 - System board (see [System board on page 79](#))

Remove the fan/heat sink assembly:

1. Disconnect the fan cable from the system board.

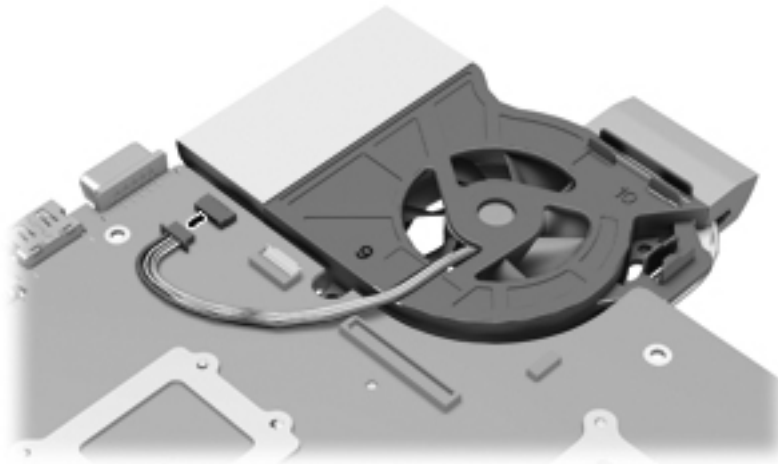

2. Turn the system board upside down, with the front toward you.




NOTE: Steps 3 and 4 apply to computer models equipped with an AMD processor. See steps 5 and 6 for fan/heat sink assembly removal information for computer models equipped with an Intel processor.


3. Following the 1 through 9 sequence indicated on the heat sink, loosen the nine captive screws **(1)** that secure the fan/heat sink assembly to the system board.




NOTE: Due to the adhesive quality of the thermal material located between the heat sink and system board components, it may be necessary to move the fan/heat sink assembly from side to side to detach it.


4. Remove the fan/heat sink assembly **(2)**.

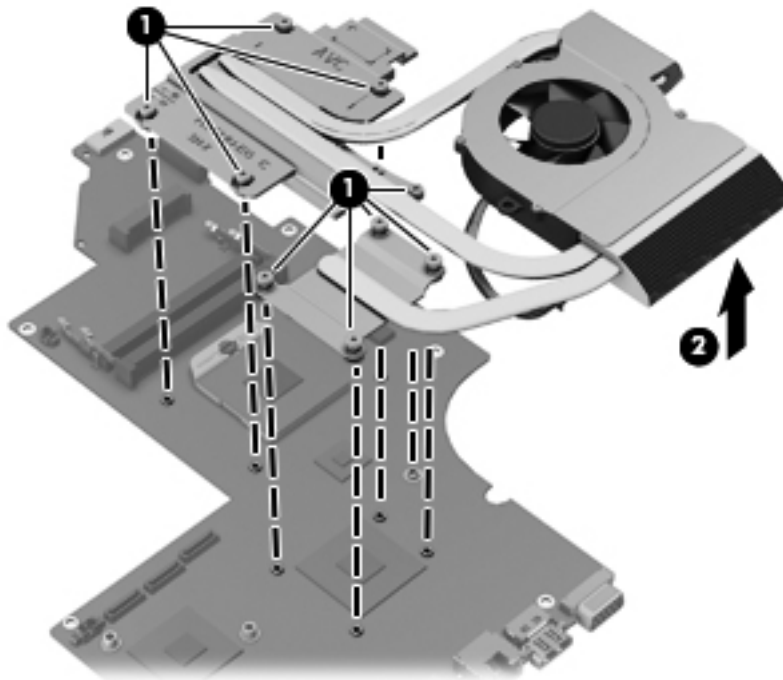


 **NOTE:** The thermal material must be thoroughly cleaned from the surfaces of the heat sink and the system board components each time the fan/heat sink assembly is removed. Replacement thermal material is included with the fan/heat sink assembly, processor, and system board spare part kits.

- Thermal paste is used on the processor **(1)** and the heat sink section **(2)** that services it
- A thermal pad is used on the Northbridge chip **(3)** and the heat sink section **(4)** that services it
- A thermal pad is used on the graphics subsystem chip **(5)** and the heat sink section **(6)** that services it (only on computer models equipped with a graphics subsystem with discrete memory)

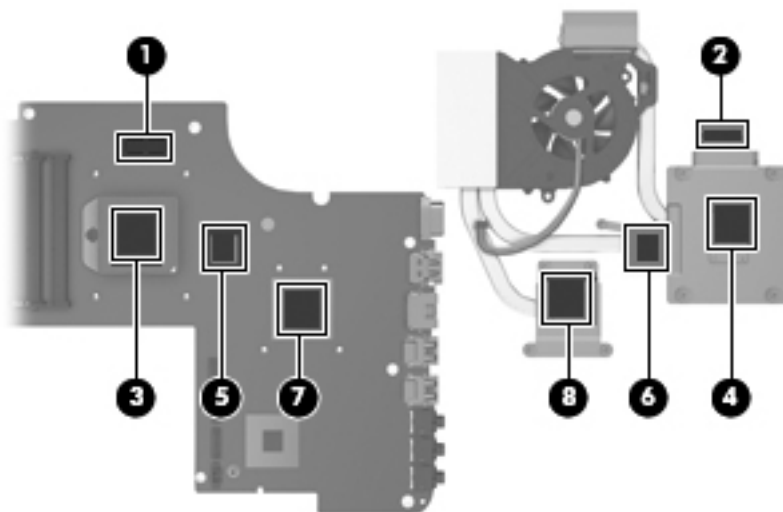



 **NOTE:** Steps 5 and 6 apply to computer models equipped with an Intel processor. See steps 3 and 4 for fan and heat sink removal information for computer models equipped with an AMD processor.

5. Following the 1 through 8 sequence indicated on the heat sink, loosen the eight screws **(1)** that secure the fan/heat sink assembly to the system board.


 **NOTE:** Due to the adhesive quality of the thermal material located between the heat sink and system board components, it may be necessary to move the fan/heat sink assembly from side to side to detach it.

6. Remove the fan/heat sink assembly **(2)**.

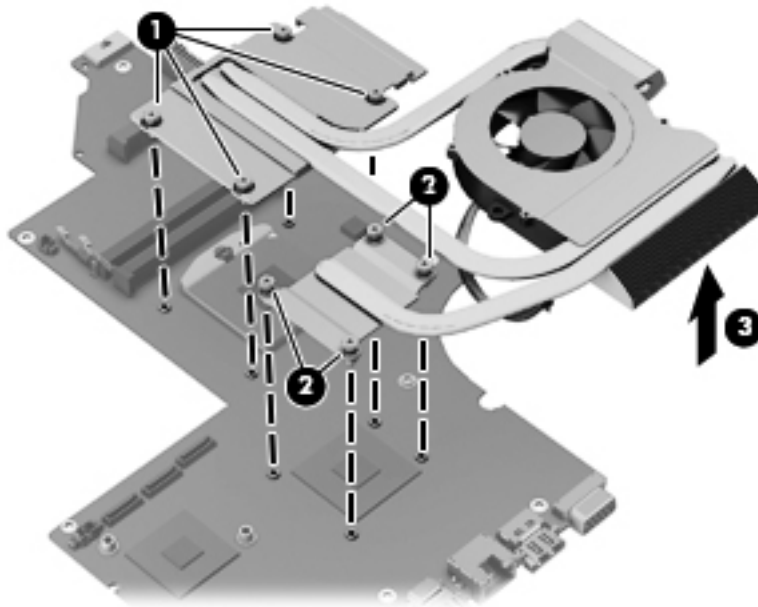


 **NOTE:** The thermal material must be thoroughly cleaned from the surfaces of the heat sink and the system board components each time the fan/heat sink assembly is removed. Replacement thermal material is included with the fan/heat sink assembly, processor, and system board spare part kits.

- A thermal pad is used on the capacitors **(1)** and the heat sink section **(2)** that services them
- Thermal paste is used on the processor **(3)** and the heat sink section **(4)** that services it
- A thermal pad is used on the graphics subsystem chip **(5)** and the heat sink section **(6)** that services it (only on computer models equipped with a graphics subsystem with discrete memory)

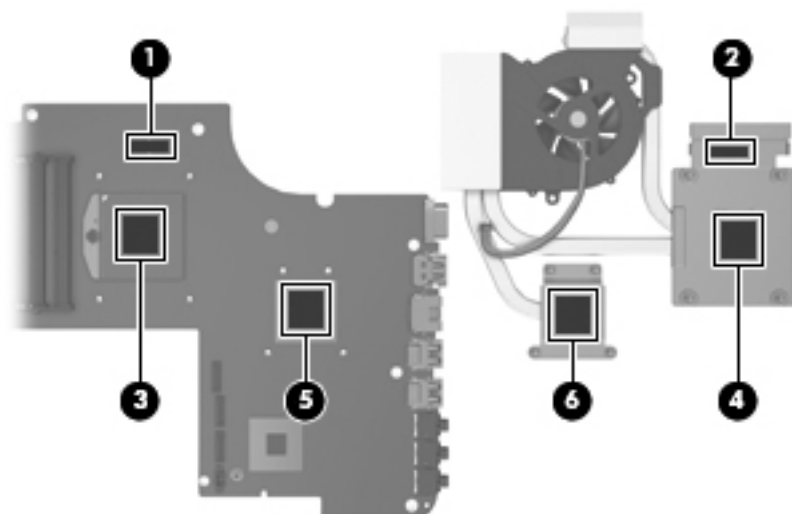

Reverse this procedure to install the fan/heat sink assembly.

Processor

 **NOTE:** The processor spare part kit includes replacement thermal material.

Description	Spare part number
AMD Athlon II N370 2.50-GHz processor (1.0-MB L2 cache, 1066-MHz FSB, 3.2-GT/second, Dual Core, 35W)	634686-001
AMD Athlon II P340 2.20-GHz processor (1.0-MB L2 cache, 1066-MHz FSB, 3.2-GT/second, Dual Core, 25W)	616343-001
AMD Athlon II P360 2.30-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 25W)	636635-001
AMD Phenom II N850 2.20-GHz processor (1.5-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Triple Core, 35W)	616345-001
AMD Phenom II P960 1.80-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Quad Core, 25W)	634689-001
AMD Phenom II P860 2.00-GHz processor (1.5-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Triple Core, 25W)	634688-001
AMD Phenom II P650 2.60-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Dual Core, 25W)	634687-001
AMD Phenom II N660 3.00-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Dual Core 35W)	635494-001
AMD Phenom II N870 2.30-GHz processor (1.5-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Triple Core, 35W)	635495-001
AMD Phenom II N970 2.20-GHz processor (2.0-MB L2 cache, 1333-MHz FSB, 3.6-GT/second, Quad Core, 35W)	635496-001
AMD Turion II N570 2.70-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 35W)	634690-001

Description	Spare part number
AMD Turion II N560 2.50-GHz processor (2.0-MB L2 cache, 1066-MHz FSB, 3.6-GT/second, Dual Core, 35W)	634691-001
Intel Quad Core i7-2820QM 2.30-GHz (turbo up to 3.10-GHz) processor (1600-MHz FSB, 8-MB L3 cache, 45W)	634694-001
Intel Quad Core i7-2720QM 2.20-GHz (turbo up to 3.00-GHz) processor (1600-MHz FSB, 6-MB L3 cache, 45W)	631254-001
Intel Quad Core i7-2630QM 2.00-GHz (turbo up to 2.90-GHz) processor (1600-MHz FSB, 6-MB L3 cache, 45W)	635501-001
Intel Dual Core i7-2620M 2.70-GHz (turbo up to 3.40-GHz) processor (1333-MHz FSB, 4-MB L3 cache, 35W)	631252-00
Intel Dual Core i5-2540M 2.60-GHz (turbo up to 3.30-GHz) processor (1333-MHz FSB, 3-MB L3 cache, 35W)	631255-001
Intel Dual Core i5-2520M 2.50-GHz (turbo up to 3.20-GHz) processor (1333-MHz FSB, 3-MB L3 cache, 35W)	631253-001
Intel Dual Core i5-2410M 2.30-GHz (turbo up to 2.90-GHz) processor (3-MB L3 cache, 35W)	638039-00
Intel Dual Core i3-2310M 2.10-GHz processor (3-MB L3 cache, 35W)	638037-001
Thermal Material Kit (includes replacement thermal pads and paste):	
For use only with computer models equipped with an AMD processor and a graphics subsystem with discrete memory	640457-001
For use only with computer models equipped with an AMD processor and a graphics subsystem with UMA memory	640456-001
For use only with computer models equipped with an Intel processor	641493-001

Before removing the processor, follow these steps:


1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - WLAN module (see [WLAN module on page 54](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))



- System board (see [System board on page 79](#))
- Fan/heat sink assembly (see [Fan/heat sink assembly on page 82](#))

Remove the processor:

1. Use a flat-bladed screw driver **(1)** to turn the processor locking screw one-half turn counterclockwise **(2)**, until you hear a click.


2. Lift the processor **(3)** straight up, and remove it.

 **NOTE:** The gold triangle **(4)** on the processor must be aligned with the triangle icon embossed on the processor socket when you install the processor.

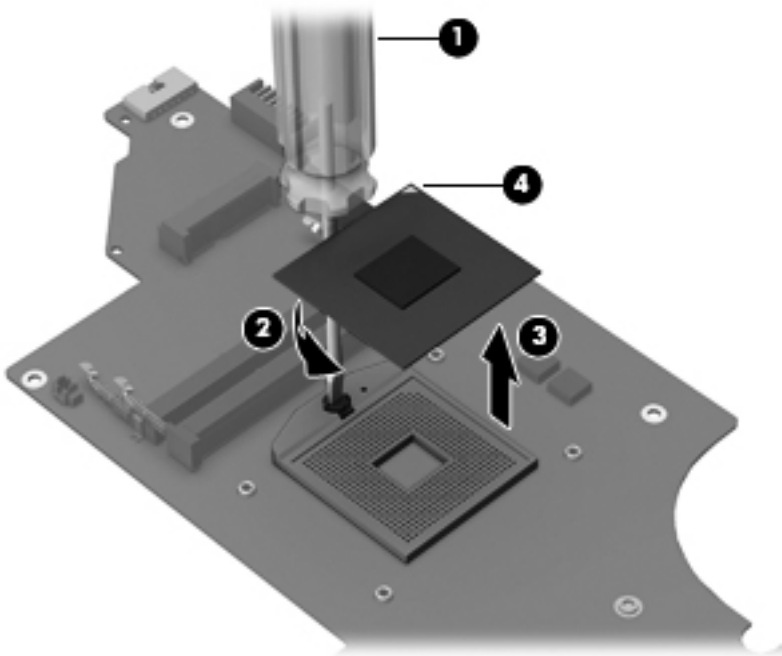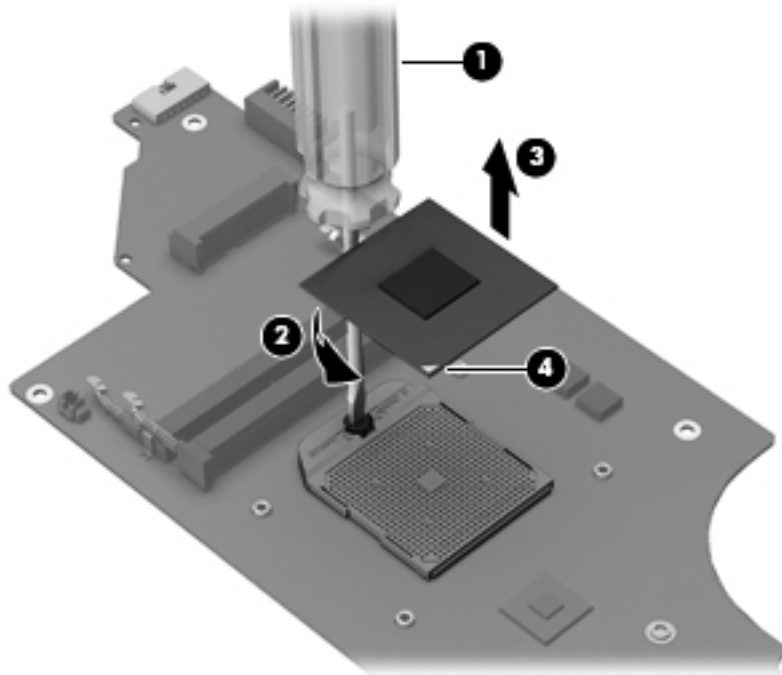

Reverse this procedure to install the processor.

Optical drive cable


 **NOTE:** The optical drive cable is included in the Optical Drive Hardware Kit, spare part number 641549-001. The optical drive cable includes the optical drive connector.

Before removing the optical drive cable, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))
 - System board (see [System board on page 79](#))

Remove the optical drive cable:

1. Release the optical drive cable **(1)** from the clips and routing channel built into the base enclosure.
2. Remove the two Phillips PM2.0×7.0 screws **(2)** that secure optical drive connector to the base enclosure.
3. Remove the optical drive cable **(2)** from the base enclosure.

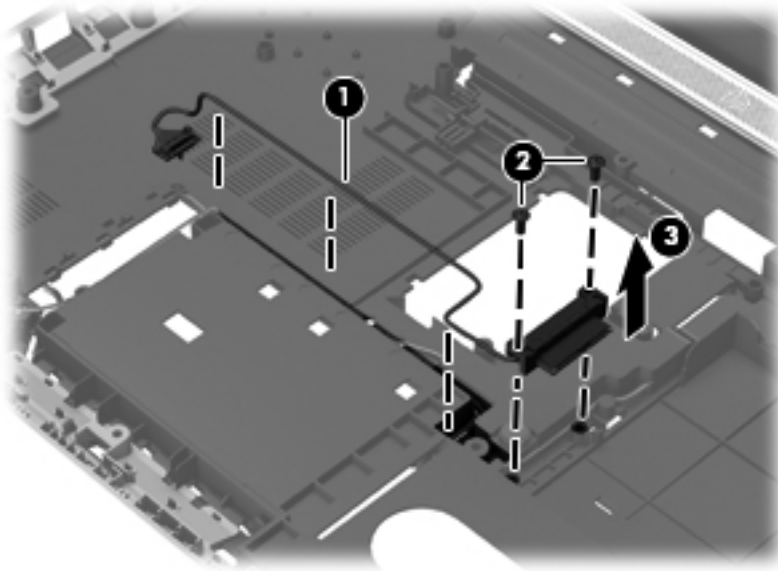

Reverse this procedure to install the optical drive cable.

Rear speakers

Description	Spare part number
Rear speakers (include rear left and right speakers, grill, and cable)	641304-001


Before removing the rear speakers, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - WLAN module (see [WLAN module on page 54](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))
 - System board (see [System board on page 79](#))


Remove the rear speakers and cables:

1. Close the computer.
2. Turn the computer upside down, with the front toward you.

3. Remove the two Phillips PM2.5×5.0 screws **(1)** and the three Phillips PM2.5×3.0 screws **(2)** that secure the rear speakers to the computer.

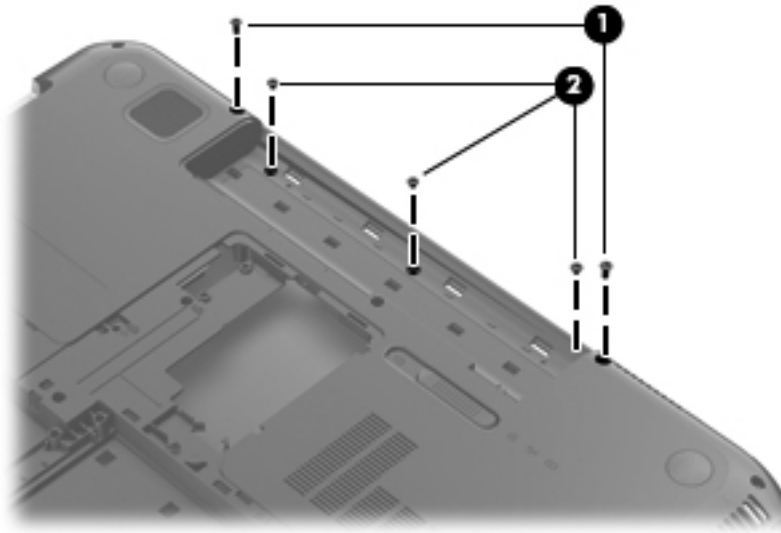

4. Turn the computer right side up, with the front toward you.
5. Open the computer.
6. Release the rear speaker cable from the clips **(1)** and the routing channel built into the base enclosure. Remove the rear speaker **(2)**.

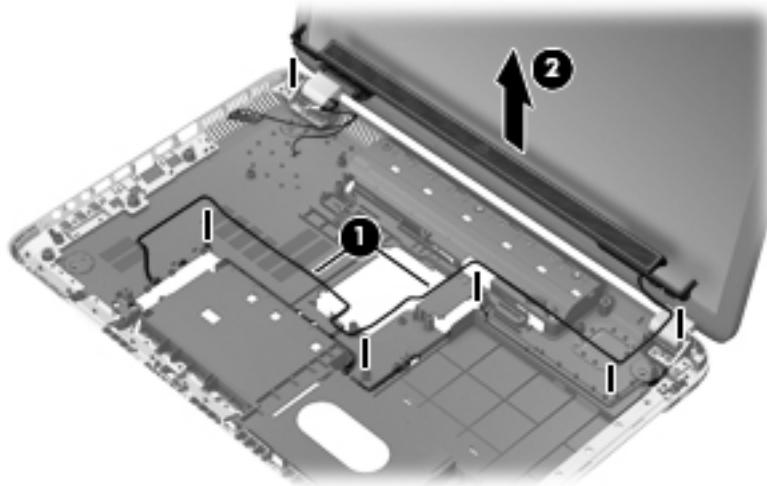

Reverse this procedure to install the rear speakers and cables.

Subwoofer

Description	Spare part number
Subwoofer (includes isolators and cable)	639393-001


Before removing the subwoofer, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - WLAN module (see [WLAN module on page 54](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))
 - System board (see [System board on page 79](#))
 - Rear speakers (see [Rear speakers on page 91](#))

Remove the rear subwoofer and cables:

1. Release the subwoofer cable **(1)** from the clips and routing channel built into the base enclosure.
2. Remove the two Phillips PM2.0×4.0 screws **(2)** and the two Phillips PM2.0×11.0 screws **(3)** that secure the subwoofer to the computer.

3. Remove the subwoofer **(4)** and cables.

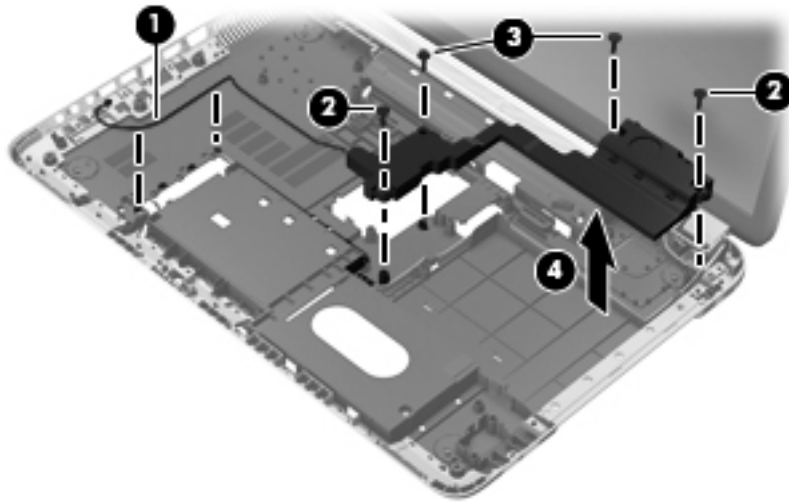

Reverse this procedure to install the subwoofer and cables.

Display assembly

Description	Spare part number
17.3-in, BrightView, high definition+ (HD+), light-emitting diode (LED), low-voltage differential signaling (LVDS) display assembly (includes webcam, two microphones, and wireless antenna transceivers and cables)	639397-001

Before removing the display assembly, follow these steps:

1. Shut down the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.
2. Disconnect all external devices connected to the computer.
3. Disconnect the power from the computer by first unplugging the power cord from the AC outlet and then unplugging the AC adapter from the computer.
4. Remove the battery (see [Battery on page 45](#)), and then remove the following components:
 - Optical drive (see [Optical drive on page 46](#))
 - Hard drive (see [Hard drive on page 49](#))
 - WLAN module (see [WLAN module on page 54](#))
 - Keyboard (see [Keyboard on page 56](#))
 - Top cover (see [Top cover on page 60](#))
 - System board (see [System board on page 79](#))
 - Rear speakers (see [Rear speakers on page 91](#))

Remove the display assembly:


1. Release the wireless antenna cables from the clips **(1)** and the opening in the base enclosure.

CAUTION: Support the display assembly when removing the following screws. Failure to support the display assembly can result in damage to the display assembly and other computer components.


2. Remove the six Phillips PM2.5×5.0 screws **(2)** and **(3)** that secure the display assembly to the computer.

NOTE: The middle screw **(3)** on the left hinge secures the display panel cable ground loop to the hinge.


3. Remove the display assembly **(4)**.

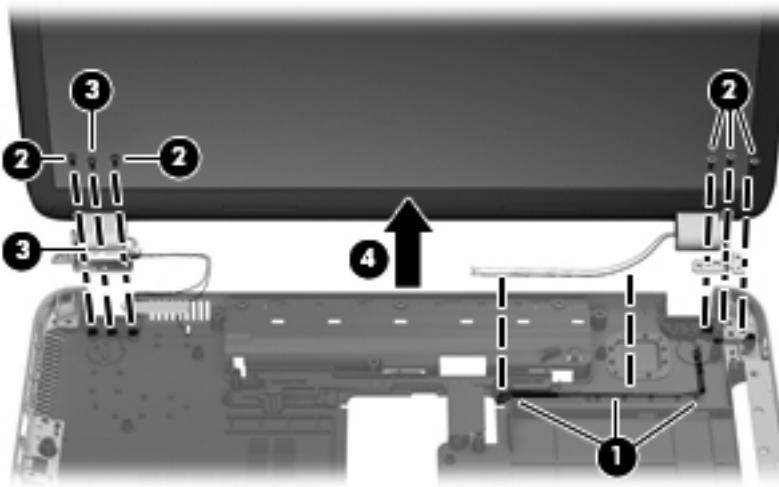

4. If it is necessary to replace the display bezel or any of the display assembly subcomponents:
- a. Remove the Mylar screw covers **(1)** and the two Phillips PM2.5×5.0 screws **(2)** that secure the display bezel to the display assembly.

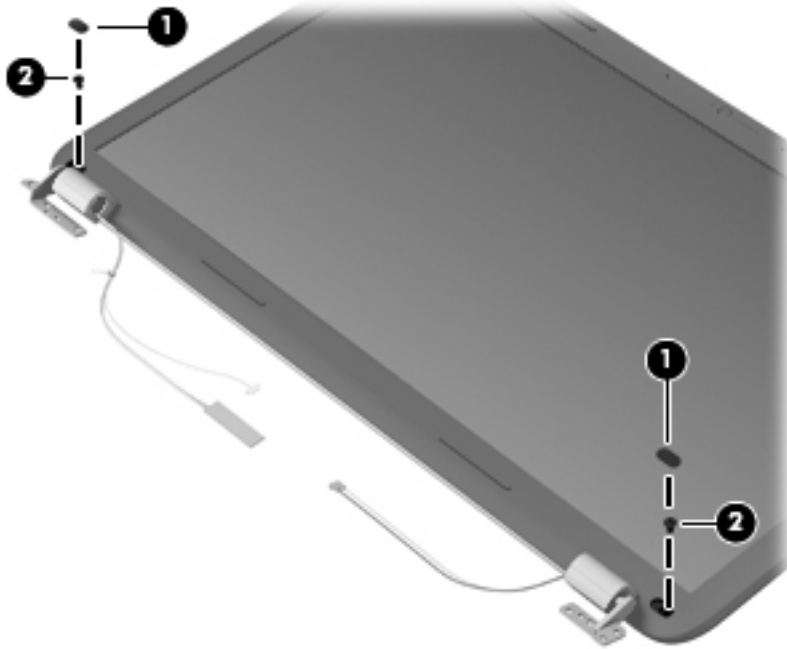


- b. Flex the inside edges of the top edge **(1)**, the left and right sides **(2)**, and the bottom edge **(3)** of the display bezel until the bezel disengages from the display enclosure.
- c. Remove the display bezel **(4)**. The display bezel is available using spare part number 639398-001.

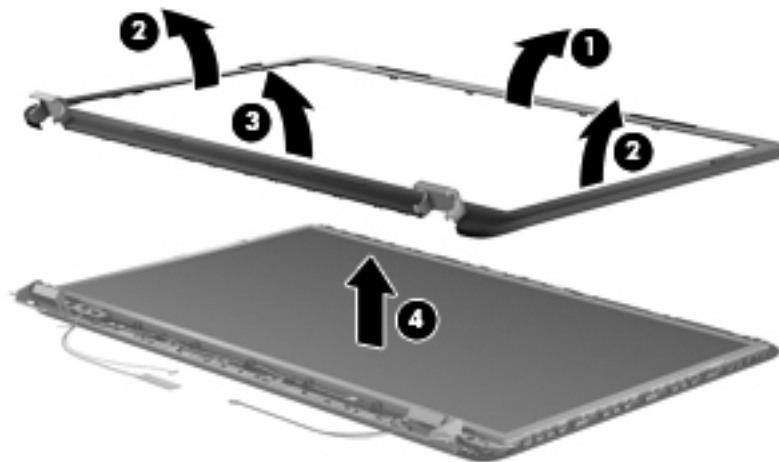


5. If it is necessary to replace the display panel:


- a.** Remove the ten Phillips PM2.5×5.0 screws that secure the display panel to the display enclosure.

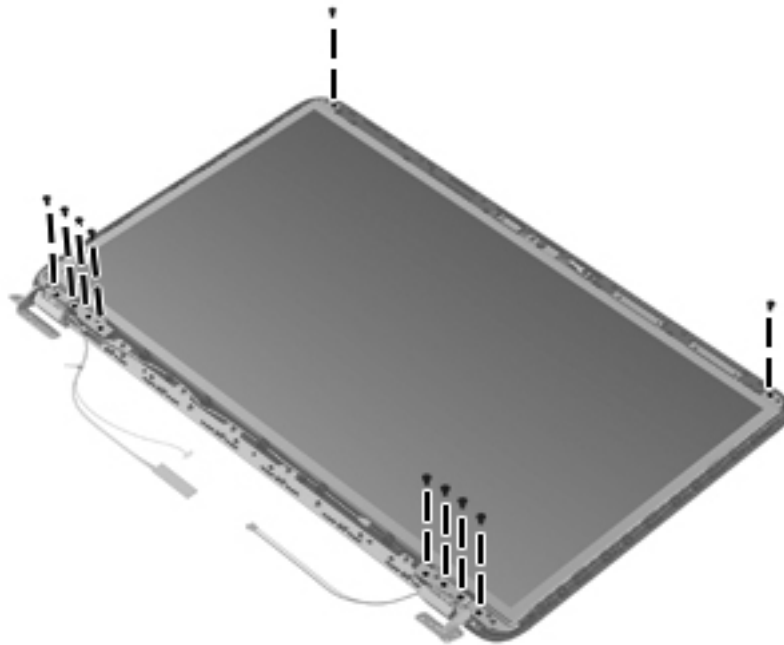

- b.** Lift the top edge of the display panel, and then swing it up and forward until it rests upside down in front of the display enclosure.

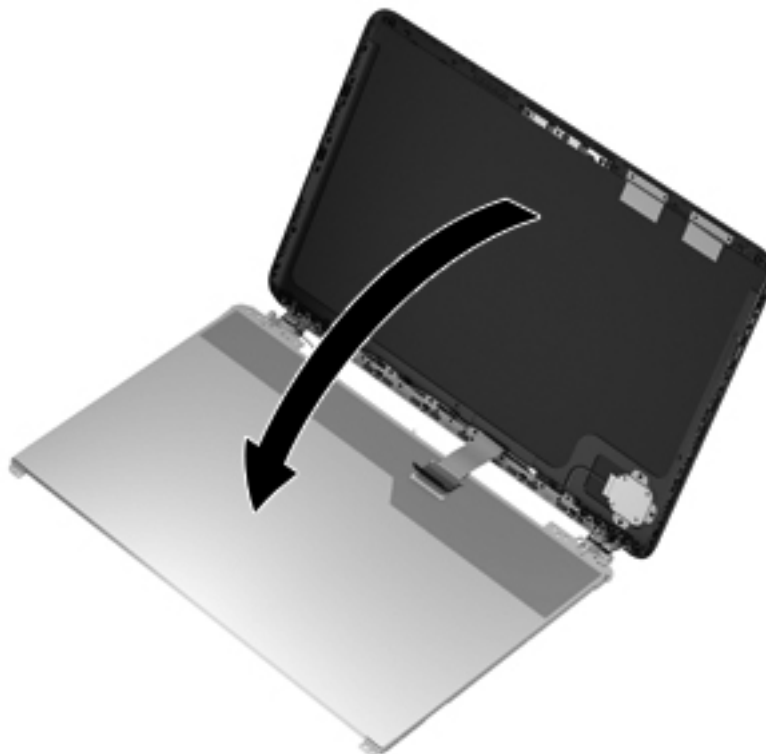


- c. Release the adhesive strip **(1)** that secures the display panel cable to the display panel, and then disconnect the display panel cable **(2)** from the display panel.

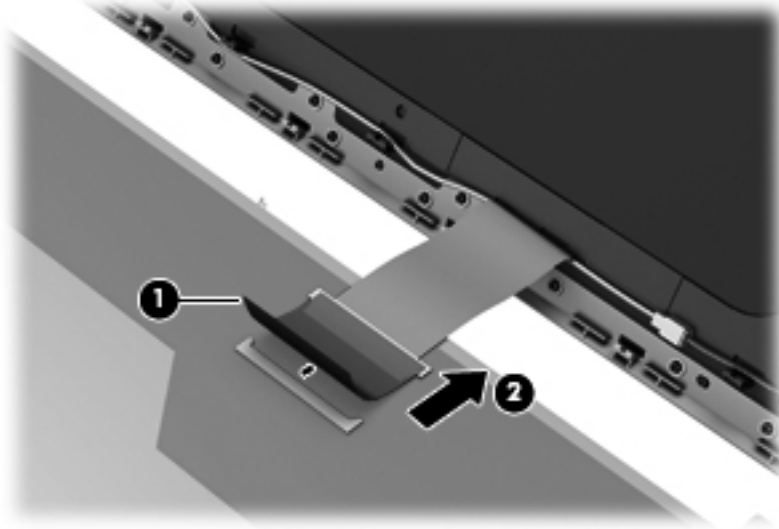

- d. Remove the display panel. The display panel is available using spare part number 641629-001.


6. If it is necessary to replace the webcam/microphone module:

- a. Detach and release the webcam/microphone module **(1)** as far as the webcam/microphone module cable allows. (The webcam/microphone module is attached to the display enclosure with double-sided tape.)
- b. Disconnect the webcam/microphone module **(2)** from the webcam/microphone module.
- c. Remove the webcam/microphone module **(3)**. The webcam/microphone module is available using spare part number 639387-001.

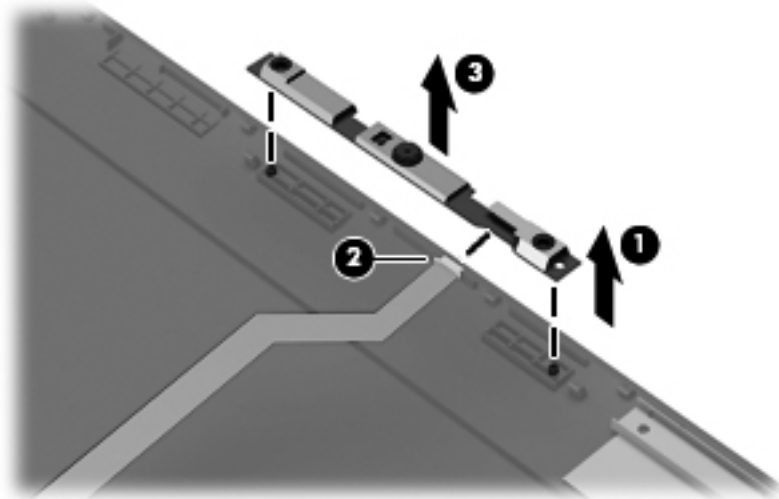

7. If it is necessary to replace the display hinges:


- a.** Remove the eight Phillips PM2.0×3.0 screws **(1)** that secure the display hinges to the display panel.
- b.** Remove the display hinges **(2)**. The display hinges include the display hinges and brackets and are available using spare part number 639403-001.

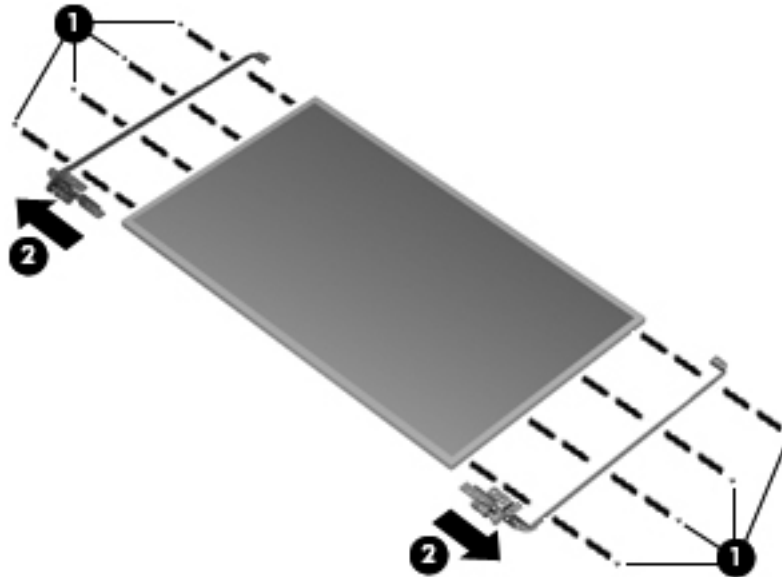

8. If it is necessary to replace the display panel cable:


- a.** Disconnect the display logo light cable **(1)** from the display panel cable.
- b.** Release the display panel cable **(2)** from the clips **(3)** built into the display enclosure.

- c. Remove the display panel cable **(4)**. The display panel cable includes the webcam/microphone module cable and is available in the Display Cable Kit, spare part number 640900-001.

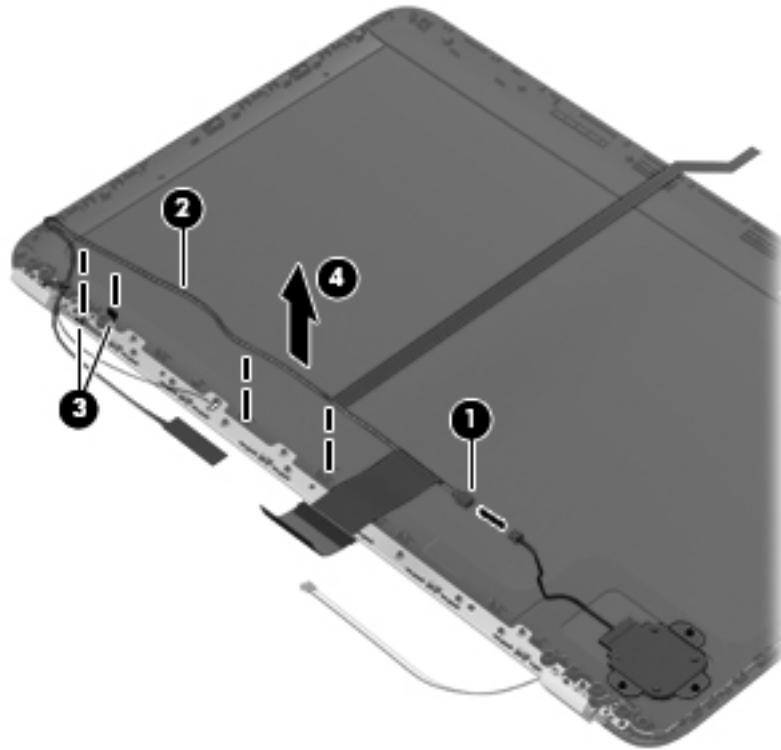

- 9. If it is necessary to replace the wireless antenna cables and transceivers:
 - a. Release the wireless antenna transceivers **(1)** from the display enclosure. (The wireless antenna transceivers are attached to the display enclosure with double-sided tape.)
 - b. Release the wireless antenna cables from the clips **(2)** built into the display enclosure.

- c. Remove the wireless antenna cables and transceivers **(3)**. The wireless antenna cables and transceivers are available in the Antenna Kit, spare part number 639401-001.

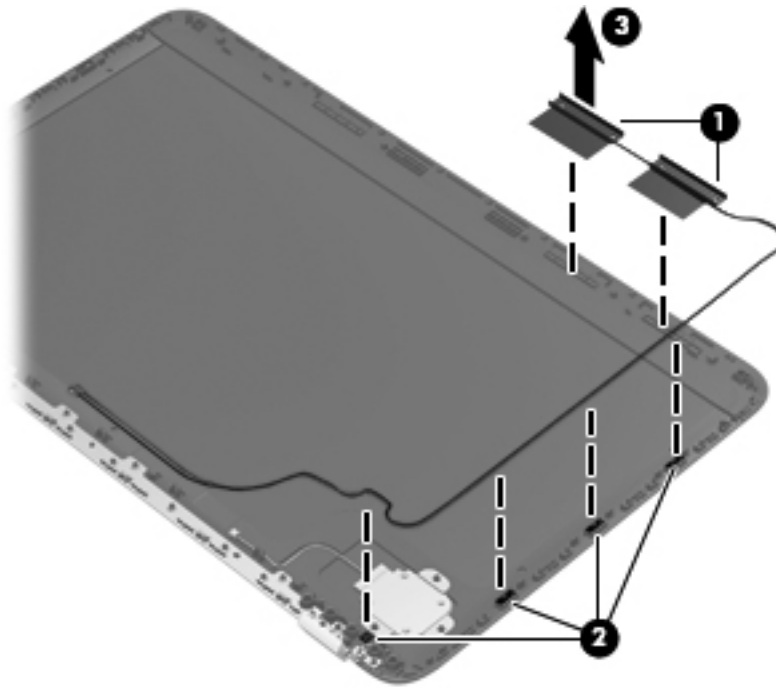


Reverse this procedure to reassemble and install the display assembly.


5 Setup Utility (BIOS) and System Diagnostics

Using Setup Utility

Setup Utility, or Basic Input/Output System (BIOS), controls communication between all the input and output devices on the system (such as disk drives, display, keyboard, mouse, and printer). Setup Utility includes settings for the types of peripherals installed, the startup sequence of the computer, and the amount of system and extended memory.

 **NOTE:** Use extreme care when making changes in Setup Utility. Errors can prevent the computer from operating properly.

Starting Setup Utility

 **NOTE:** An external keyboard or mouse connected to a USB port can be used with Setup Utility only if USB legacy support is enabled.

To start Setup Utility, follow these steps:

1. Turn on or restart the computer, and then press **esc** while the “Press the ESC key for Startup Menu” message is displayed at the bottom of the screen.
2. Press **f10** to enter Setup Utility.

Changing the language of Setup Utility

1. Start Setup Utility.
2. Use the arrow keys to select **System Configuration > Language**, and then press **enter**.
3. Use the arrow keys to select a language, and then press **enter**.
4. When a confirmation prompt with your language selected is displayed, press **enter**.
5. To save your change and exit Setup Utility, use the arrow keys to select **Exit > Exit Saving Changes**, and then press **enter**.

Your change takes effect immediately.

Navigating and selecting in Setup Utility

To navigate and select in Setup Utility, follow these steps:

1. Turn on or restart the computer, and then press **esc** while the “Press the ESC key for Startup Menu” message is displayed at the bottom of the screen.
 - To select a menu or a menu item, use the tab key and the keyboard arrow keys and then press **enter**, or use a pointing device to click the item.
 - To scroll up and down, click the up arrow or the down arrow in the upper-right corner of the screen, or use the up arrow key or the down arrow key.
 - To close open dialog boxes and return to the main Setup Utility screen, press **esc**, and then follow the on-screen instructions.



NOTE: You can use either a pointing device (TouchPad, pointing stick, or USB mouse) or the keyboard to navigate and make selections in Setup Utility.

2. Press **f10** to enter Setup Utility.

To exit Setup Utility menus, choose one of the following methods:

- To exit Setup Utility menus without saving your changes, click the **Exit** icon in the lower-left corner of the screen, and then follow the on-screen instructions.

– or –

Use the tab key and the arrow keys to select **File > Ignore Changes and Exit**, and then press **enter**.

- To save your changes and exit Setup Utility menus, click the **Save** icon in the lower-left corner of the screen, and then follow the on-screen instructions.

– or –


Use the tab key and the arrow keys to select **File > Save Changes and Exit**, and then press **enter**.

Your changes go into effect when the computer restarts.

Displaying system information

1. Start Setup Utility.
2. Select the **Main** menu. System information such as the system time and date, and identification information about the computer is displayed.
3. To exit Setup Utility without changing any settings, use the arrow keys to select **Exit > Exit Discarding Changes**, and then press **enter**.

Restoring factory settings in Setup Utility

 **NOTE:** Restoring defaults will not change the hard drive mode.


To return all settings in Setup Utility to the values that were set at the factory, follow these steps:

1. Turn on or restart the computer, and then press **esc** while the “Press the ESC key for Startup Menu” message is displayed at the bottom of the screen.
2. Press **f10** to enter Setup Utility.
3. Use a pointing device or the arrow keys to select **File > Restore Defaults**.
4. Follow the on-screen instructions.
5. To save your changes and exit, click the **Save** icon in the lower-left corner of the screen, and then follow the on-screen instructions.

– or –

Use the arrow keys to select **File > Save Changes and Exit**, and then press **enter**.

Your changes go into effect when the computer restarts.

 **NOTE:** Your password settings and security settings are not changed when you restore the factory settings.

Exiting Setup Utility

- To exit Setup Utility and save your changes from the current session:
If the Setup Utility menus are not visible, press **esc** to return to the menu display. Then use the arrow keys to select **Exit > Exit Saving Changes**, and then press **enter**.
- To exit Setup Utility without saving your changes from the current session:
If the Setup Utility menus are not visible, press **esc** to return to the menu display. Then use the arrow keys to select **Exit > Exit Discarding Changes**, and then press **enter**.

Updating the BIOS

Updated versions of the BIOS may be available on the HP Web site.

Most BIOS updates on the HP Web site are packaged in compressed files called *SoftPaqs*.

Some download packages contain a file named *Readme.txt*, which contains information regarding installing and troubleshooting the file.

Determining the BIOS version

To determine whether available BIOS updates contain later BIOS versions than those currently installed on the computer, you need to know the version of the system BIOS currently installed.


BIOS version information (also known as ROM date and System BIOS) can be displayed by pressing **fn + esc** (if you are already in Windows) or by using Setup Utility.

1. Start Setup Utility.
2. Use a pointing device or the arrow keys to select **File > System Information**.
3. To exit Setup Utility without saving your changes, click the **Exit** icon in the lower-left corner of the screen, and then follow the on-screen instructions.

– or –

Use the tab key and the arrow keys to select **File > Ignore Changes and Exit**, and then press **enter**.

Downloading a BIOS update

 **CAUTION:** To reduce the risk of damage to the computer or an unsuccessful installation, download and install a BIOS update only when the computer is connected to reliable external power using the AC adapter. Do not download or install a BIOS update while the computer is running on battery power, docked in an optional docking device, or connected to an optional power source. During the download and installation, follow these instructions:

Do not disconnect power from the computer by unplugging the power cord from the AC outlet.

Do not shut down the computer or initiate Sleep or Hibernation.

Do not insert, remove, connect, or disconnect any device, cable, or cord.

1. **Windows 7**—Select **Start > Help and Support > Maintain**.

Windows XP—Select **Start > Help and Support**, and then select the software and drivers update.

2. Follow the on-screen instructions to identify your computer and access the BIOS update you want to download.
3. At the download area, follow these steps:
 - a. Identify the BIOS update that is later than the BIOS version currently installed on your computer. Make a note of the date, name, or other identifier. You may need this information to locate the update later, after it has been downloaded to your hard drive.
 - b. Follow the on-screen instructions to download your selection to the hard drive. Make a note of the path to the location on your hard drive where the BIOS update is downloaded. You will need to access this path when you are ready to install the update.




NOTE: If you connect your computer to a network, consult the network administrator before installing any software updates, especially system BIOS updates.

BIOS installation procedures vary. Follow any instructions that are displayed on the screen after the download is complete. If no instructions are displayed, follow these steps:

1. **Windows 7**—Open Windows Explorer by selecting **Start > Computer**.
Windows XP—Open Windows Explorer by selecting **Start > My Computer**.
2. Double-click your hard drive designation. The hard drive designation is typically Local Disk (C:).
3. Using the hard drive path you recorded earlier, open the folder on your hard drive that contains the update.
4. Double-click the file that has an .exe extension (for example, *filename.exe*).

The BIOS installation begins.

5. Complete the installation by following the on-screen instructions.

 **NOTE:** After a message on the screen reports a successful installation, you can delete the downloaded file from your hard drive.

Using System Diagnostics


System Diagnostics allows you to run diagnostic tests to determine if the computer hardware is functioning properly. The following diagnostic tests are available in System Diagnostics:

- Start-up test—This test analyzes the main computer components that are required to start the computer.
- Run-in test—This test repeats the start-up test and checks for intermittent problems that the start-up test does not detect.
- Hard disk test—This test analyzes the physical condition of the hard drive, and then checks all data in every sector of the hard drive. If the test detects a damaged sector, it attempts to move the data to a good sector.
- Memory test—This test analyzes the physical condition of the memory modules. If it reports an error, replace the memory modules immediately.
- Battery test—This test analyzes the condition of the battery. If the battery fails the test, contact HP support to report the issue and purchase a replacement battery.

You can also view system information and error logs in the System Diagnostics window.

To start System Diagnostics:

1. Turn on or restart the computer. While the “Press the ESC key for Startup Menu” message is displayed in the lower-left corner of the screen, press **esc**. When the Startup Menu is displayed, press **f2**.
2. Click the diagnostic test you want to run, and then follow the on-screen instructions.

 **NOTE:** If you need to stop a diagnostics test while it is running, press **esc**.

6 Specifications

Device specifications

	Metric	U.S.
Dimensions		
Depth	27.5 cm	10.8 in
Width	41.6 cm	16.4 in
Height (front to rear)	3.2-3.6 cm	1.2-1.4 in
Weight	3.43 kg	7.57 lb
Input power		
Operating voltage	18.5 V dc @ 3.5 A - 65 W or 19 V dc @ 4.74 A - 90 W	
Operating current	3.5 A or 4.74 A	
Temperature		
Operating	5°C to 35°C	41°F to 95°F
Nonoperating	-20°C to 6°C	-4°F to 140°F
Relative humidity (noncondensing)		
Operating	10% to 90%	
Nonoperating	5% to 95%	
Maximum altitude (unpressurized)		
Operating	-15 m to 3,048 m	-50 ft to 10,000 ft
Nonoperating	-15 m to 12,192 m	-50 ft to 40,000 ft
NOTE: Applicable product safety standards specify thermal limits for plastic surfaces. The device operates well within this range of temperatures.		

17.3-inch display specifications

	Metric	U.S.
Dimensions		
Height	21.7 cm	8.54 in
Width	38.4 cm	15.12 in
Diagonal	43.9 cm	17.29 in
Number of colors	Up to 16.8 million	
Contrast ratio	200:1 (typical)	
Brightness	180 nits (typical)	
Pixel resolution		
Pitch	0.197 × 0.197 mm	
Format	1600 × 900	
Configuration	RGB vertical stripe	
Backlight	LED	
Character display	80 × 25	
Total power consumption (varies by display)	2.0 W	
Viewing angle	±65° horizontal, ±50° vertical (typical)	

Hard drive specifications

	1-TB*	750-GB**	640-GB**	500-GB**	320-GB**	250-GB**	160-GB**
Dimensions							
Height	12.7 mm	12.7 mm	9.5 mm	9.5 mm	9.5 mm	9.5 mm	9.5 mm
Length	100.2 mm	100.2 mm	100.2 mm	100.4 mm	100.4 mm	100.4 mm	100.4 mm
Width	69.9 mm	69.9 mm	69.9 mm	69.9 mm	69.9 mm	69.9 mm	69.9 mm
Weight	152 g	152 g	98 g	110 g	110 g	105 g	105 g
Interface type	SATA (3 GB/sec)	SATA (3 GB/sec)	SATA (3 GB/sec)	SATA	SATA	SATA	SATA
Transfer rate							
Synchronous (maximum)	97 MB/sec	97 MB/sec	106 MB/sec	1.1 GB/sec (internal)	1.1 GB/sec (internal)	1.1 GB/sec (internal)	1.1 GB/sec (internal)
Security	ATA security	ATA security	ATA security	ATA security	ATA security	ATA security	ATA security
Seek times (typical read, including setting)							
Single track	2 ms	2 ms	1.5 ms	1.5 ms	1.5 ms	1.5 ms	1.5 ms
Average (read/write)	12/16 ms	12/16 ms	12/13 ms	11/13 ms	11/13 ms	11/13 ms	11/13 ms
Maximum	21 ms	21 ms	24 ms	22 ms	22 ms	22 ms	22 ms
Logical blocks	1,953,525,168	1,465,149,168	1,250,263,728	976,773,168	628,142,448	488,397,168	312,581,808
Disk rotational speed	5400 rpm	7200 and 5400 rpm	7200 and 5400 rpm	7200 and 5400 rpm	7200 and 5400 rpm	7200 and 5400 rpm	7200 and 5400 rpm
Operating temperature	0°C to 60°C (32°F to 140°F)						
* 1 TB = 1 trillion bytes when referring to hard drive storage capacity. Actual accessible capacity is less.							
**1 GB = 1 billion bytes when referring to hard drive storage capacity. Actual accessible capacity is less.							
NOTE: Certain restrictions and exclusions apply. Contact technical support for details.							

7 Backup and recovery

Your computer includes tools provided by the operating system and HP to help you safeguard your information and restore it if ever needed.


This chapter provides information on the following topics:


- Creating a set of recovery discs or a recovery flash drive (Recovery Manager software feature)
- Performing a system restore (from the partition, recovery discs, or a recovery flash drive)
- Backing up your information
- Recovering a program or driver

Restore

In the event of hard drive failure, to restore your system to its factory image you will need a set of recovery discs or a recovery flash drive that you can create using HP Recovery Manager. HP recommends that you use this software to create either a set of recovery discs or a recovery flash drive immediately after software setup.


If for some other reason you need to restore your system, this can be achieved using the HP Recovery partition (select models only), without the need for recovery discs or a recovery flash drive. To check for the presence of a recovery partition, click **Start**, right-click **Computer**, click **Manage**, and then click **Disk Management**. If the recovery partition is present, a Recovery drive is listed in the window.


 **CAUTION:** HP Recovery Manager (partition, or discs/flash drive) restores only software that was preinstalled at the factory. Software not provided with this computer must be reinstalled manually.

 **NOTE:** Recovery discs have been included if your computer does not have a recovery partition.

Creating restore media


HP recommends that you create either a set of recovery discs or a recovery flash drive to be sure that you can restore your computer to its original factory state if the hard drive fails, or if for any reason you cannot restore using the recovery partition tools. Create these discs or the flash drive after setting up the computer for the first time.

 **NOTE:** HP Recovery Manager allows the creation of only one set of recovery discs or one recovery flash drive. Handle these discs or flash drive carefully and keep them in a safe place.


 **NOTE:** If your computer does not include an integrated optical drive, you can use an optional external optical drive (purchased separately) to create recovery discs, or you can purchase recovery discs for your computer from the HP Web site. If you use an external optical drive, it must be connected directly to a USB port on the computer, not to a USB port on an external device, such as a USB hub.

Guidelines:

- Purchase high-quality DVD-R, DVD+R, DVD-R DL, or DVD+R DL discs.

 **NOTE:** Read-write discs, such as CD-RW, DVD±RW, double-layer DVD±RW, and BD-RE (rewritable Blu-ray) discs, are not compatible with the Recovery Manager software.

- The computer must be connected to AC power during this process.
- Only one set of recovery discs or one recovery flash drive can be created per computer.

 **NOTE:** If you are creating recovery discs, number each disc before inserting into the optical drive.

- If necessary, you can exit the program before you have finished creating the recovery discs or recovery flash drive. The next time you open Recovery Manager, you will be prompted to continue the backup creation process.

To create a set of recovery discs or a recovery flash drive:

1. Select **Start > All Programs > Recovery Manager > Recovery Media Creation**.
2. Follow the on-screen instructions.

Performing a system restore

Recovery Manager software allows you to repair or restore the computer to its original factory state. Recovery Manager works from recovery discs, a recovery flash drive, or from a dedicated recovery partition (select models only) on the hard drive.



NOTE: A system restore needs to be performed if the computer hard drive has failed or if all attempts to correct any functional computer issues fail.

A system restore should be used as a final attempt to correct computer issues.

Note the following when performing a system restore:

- You can restore only the system that you have previously backed up. HP recommends that you use HP Recovery Manager to create either a set of recovery discs or a recovery flash drive as soon as you set up the computer.
- Windows has its own built-in repair features, such as System Restore. If you have not already tried these features, try them before using Recovery Manager.
- Recovery Manager restores only software that was preinstalled at the factory. Software not provided with this computer must be downloaded from the manufacturer's Web site or reinstalled from the disc provided by the manufacturer.

Restoring using the dedicated recovery partition (select models only)

When using the dedicated recovery partition, there is an option to back up pictures, music and other audio, videos and movies, recorded TV shows, documents, spreadsheets and presentations, e-mails, Internet favorites and settings during this process.

To restore the computer from the recovery partition, follow these steps:

1. Access Recovery Manager in either of the following ways:
 - Select **Start > All Programs > Recovery Manager > Recovery Manager**.
 - or –
 - Turn on or restart the computer, and then press **esc** while the “Press the ESC key for Startup Menu” message is displayed at the bottom of the screen. Then, press **f11** while the “F11 (System Recovery)” message is displayed on the screen.
2. Click **System Recovery** in the **Recovery Manager** window.
3. Follow the on-screen instructions.

Restoring using the restore media

1. If possible, back up all personal files.
2. Insert the first recovery disc into the optical drive on your computer or an optional external optical drive, and then restart the computer.

– or –

Insert the recovery flash drive into a USB port on your computer, and then restart the computer.



NOTE: If the computer does not automatically restart in the Recovery Manager, the computer boot order needs to be changed.

3. Press **f9** at system bootup.
4. Select the optical drive or the flash drive.
5. Follow the on-screen instructions.

Changing the computer boot order

To change the boot order for recovery discs:

1. Restart the computer.
2. Press **esc** while the computer is restarting, and then press **f9** for boot options.
3. Select **Internal CD/DVD ROM Drive** from the boot options window.

To change the boot order for recovery flash drive:

1. Insert the flash drive into a USB port.
2. Restart the computer.
3. Press **esc** while the computer is restarting, and then press **f9** for boot options.
4. Select the flash drive from the boot options window.

Backing up and recovering your information

It is very important to back up your files and keep any new software in a safe place. As you add new software and data files, continue to create backups on a regular basis.

How completely you are able to recover your system depends on how recent your backup is.



NOTE: A recovery from your most recent backup needs to be performed if the computer has a virus attack or if any major system components fail. In order to correct computer issues, a recovery should first be attempted before a system restore is attempted. You can back up your information to an optional external hard drive, a network drive, or discs.

Back up your system at the following times:

- At regularly scheduled times



TIP: Set reminders to back up your information periodically.

- Before the computer is repaired or restored
- Before you add or modify hardware or software

Guidelines:

- Create system restore points using the Windows System Restore feature, and periodically copy them to an optical disc or an external hard drive. For more information on using system restore points, refer to **Using Windows system restore points**.
- Store personal files in the Documents library and back up this folder periodically.
- Save customized settings in a window, toolbar, or menu bar by taking a screen shot of your settings. The screen shot can be a time-saver if you have to re-enter your preferences.

To create a screen shot:

1. Display the screen you want to save.
2. Copy the screen image:

To copy only the active window, press **alt+fn+prt sc**.

To copy the entire screen, press **fn+prt sc**.

3. Open a word-processing document, and then select **Edit > Paste**. The screen image is added to the document.
4. Save and print the document.

Using Windows Backup and Restore

Guidelines:

- Be sure that the computer is connected to AC power before you start the backup process.
- Allow enough time to complete the backup process. Depending on file sizes, it may take over an hour.

To create a backup:

1. Select **Start > Control Panel > System and Security > Backup and Restore**.
2. Follow the on-screen instructions to schedule and create a backup.



NOTE: Windows includes the User Account Control feature to improve the security of the computer. You may be prompted for your permission or password for tasks such as installing software, running utilities, or changing Windows settings. Refer to Help and Support for more information.

Using Windows system restore points

A system restore point allows you to save and name a snapshot of your hard drive at a specific point in time. You can then recover back to that point if you want to reverse subsequent changes.



NOTE: Recovering to an earlier restore point does not affect data files saved or e-mails created since the last restore point.

You also can create additional restore points to provide increased protection for your files and settings.

When to create restore points

- Before you add or modify software or hardware
- Periodically, whenever the computer is functioning optimally



NOTE: If you revert to a restore point and then change your mind, you can reverse the restoration.

Create a system restore point

1. Select **Start > Control Panel > System and Security > System**.
2. In the left pane, click **System Protection**.
3. Click the **System Protection** tab.
4. Follow the on-screen instructions.

Restore to a previous date and time

To revert to a restore point (created at a previous date and time), when the computer was functioning optimally, follow these steps:

1. Select **Start > Control Panel > System and Security > System**.
2. In the left pane, click **System Protection**.
3. Click the **System Protection** tab.
4. Click **System Restore**.
5. Follow the on-screen instructions.

8 Power cord set requirements

The wide-range input feature of the computer permits it to operate from any line voltage from 100 to 120 volts AC, or from 220 to 240 volts AC

The 3-conductor power cord set included with the computer meets the requirements for use in the country or region where the equipment is purchased.

Power cord sets for use in other countries and regions must meet the requirements of the country or region where the computer is used.

Requirements for all countries

The following requirements are applicable to all countries and regions:

- The length of the power cord set must be at least **1.5 m** (5.0 ft) and no more than **2.0 m** (6.5 ft).
- All power cord sets must be approved by an acceptable accredited agency responsible for evaluation in the country or region where the power cord set will be used.
- The power cord sets must have a minimum current capacity of 10 amps and a nominal voltage rating of 125 or 250 V AC, as required by the power system of each country or region.
- The appliance coupler must meet the mechanical configuration of an EN 60 320/IEC 320 Standard Sheet C13 connector for mating with the appliance inlet on the back of the computer.

Requirements for specific countries and regions

Country/region	Accredited agency	Applicable note number
Australia	EANSW	1
Austria	OVE	1
Belgium	CEBC	1
Canada	CSA	2
Denmark	DEMKO	1
Finland	FIMKO	1
France	UTE	1
Germany	VDE	1
Italy	IMQ	1
Japan	METI	3
The Netherlands	KEMA	1
Norway	NEMKO	1
The People's Republic of China	COC	5
South Korea	EK	4
Sweden	SEMKO	1
Switzerland	SEV	1
Taiwan	BSMI	4
The United Kingdom	BSI	1
The United States	UL	2

1. The flexible cord must be Type HO5VV-F, 3-conductor, 1.0-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.
2. The flexible cord must be Type SPT-3 or equivalent, No. 18 AWG, 3-conductor. The wall plug must be a two-pole grounding type with a NEMA 5-15P (15 A, 125 V) or NEMA 6-15P (15 A, 250 V) configuration.
3. The appliance coupler, flexible cord, and wall plug must bear a "T" mark and registration number in accordance with the Japanese Dentori Law. The flexible cord must be Type VCT or VCTF, 3-conductor, 1.00-mm² conductor size. The wall plug must be a two-pole grounding type with a Japanese Industrial Standard C8303 (7 A, 125 V) configuration.
4. The flexible cord must be Type RVV, 3-conductor, 0.75-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.
5. The flexible cord must be Type VCTF, 3-conductor, 0.75-mm² conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.

9 Recycling

Battery

When a battery has reached the end of its useful life, do not dispose of the battery in general household waste. Follow the local laws and regulations in your area for computer battery disposal.


Display

⚠ WARNING! The backlight contains mercury. Caution must be exercised when removing and handling the backlight to avoid damaging this component and causing exposure to the mercury.

⚠ CAUTION: The procedures in this chapter can result in damage to display components. The only components intended for recycling purposes are the liquid crystal display (LCD) panel and the backlight. When you remove these components, handle them carefully.

📝 NOTE: Materials Disposal. This HP product contains mercury in the backlight in the display assembly that might require special handling at end-of-life. Disposal of mercury may be regulated because of environmental considerations. For disposal or recycling information, contact your local authorities, or see the Electronic Industries Alliance (EIA) Web site at <http://www.eiai.org>.


This section provides disassembly instructions for the display assembly. The display assembly must be disassembled to gain access to the backlight **(1)** and the liquid crystal display (LCD) panel **(2)**.

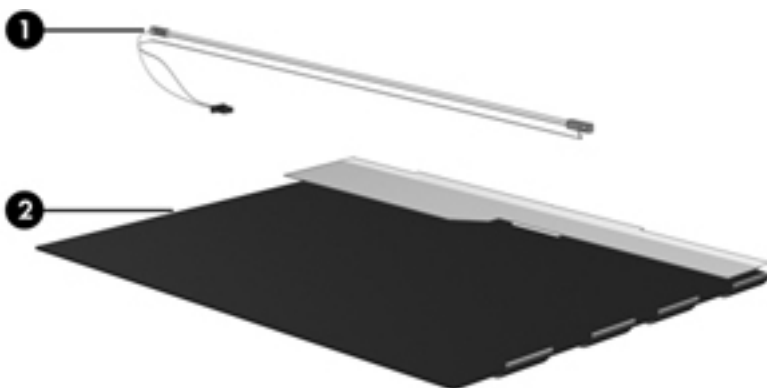


📝 NOTE: The procedures provided in this chapter are general disassembly instructions. Specific details, such as screw sizes, quantities, and locations, and component shapes and sizes, can vary from one computer model to another.

Perform the following steps:


1. Remove all screw covers **(1)** and screws **(2)** that secure the display bezel to the display assembly.

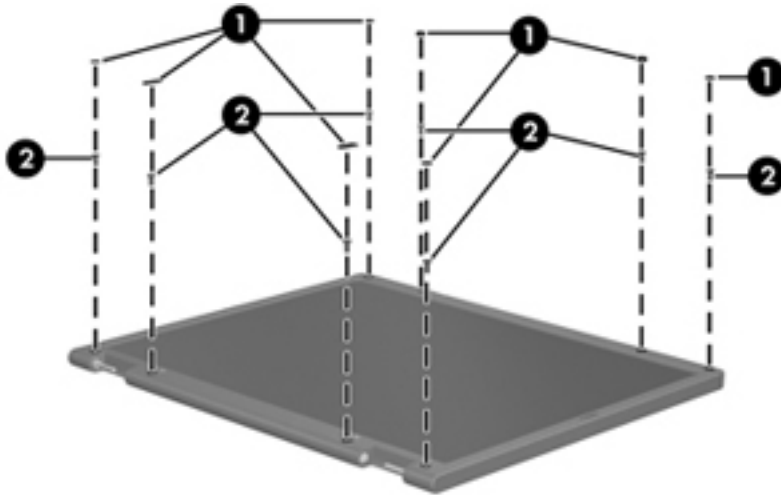


2. Lift up and out on the left and right inside edges **(1)** and the top and bottom inside edges **(2)** of the display bezel until the bezel disengages from the display assembly.
3. Remove the display bezel **(3)**.

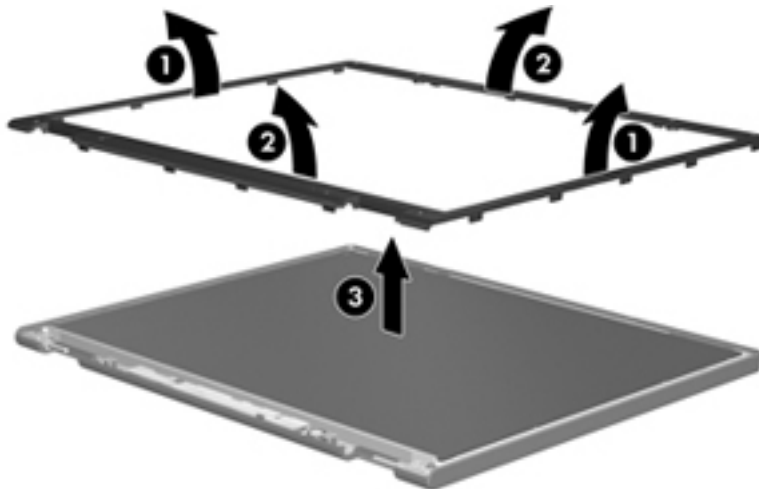


4. Disconnect all display panel cables **(1)** from the display inverter and remove the inverter 2.

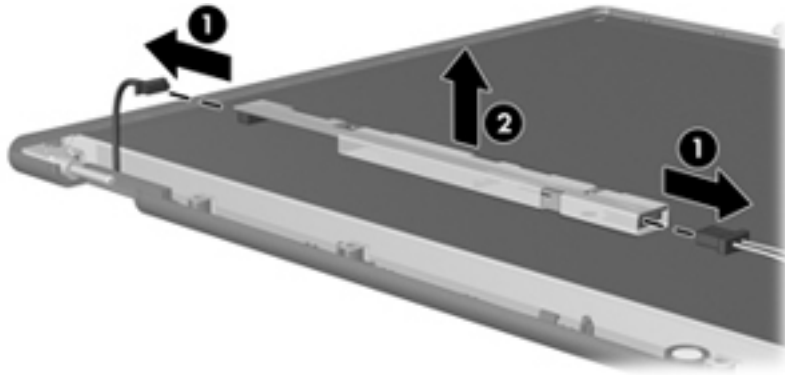

5. Remove all screws **(1)** that secure the display panel assembly to the display enclosure.
6. Remove the display panel assembly **(2)** from the display enclosure.

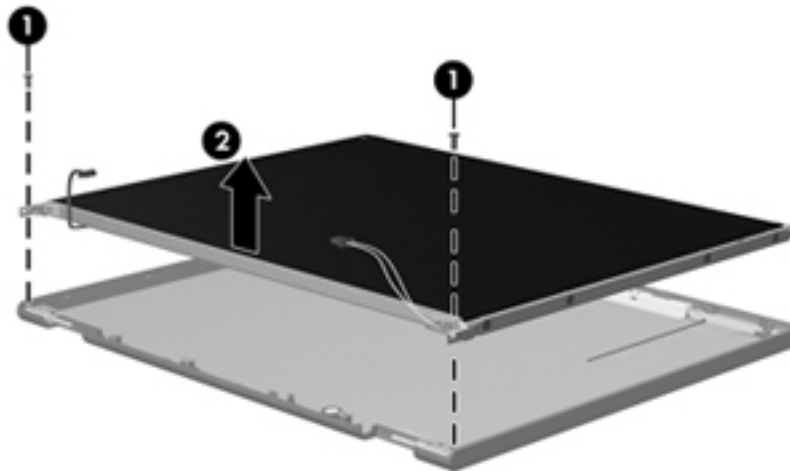


7. Turn the display panel assembly upside down.
8. Remove all screws that secure the display panel frame to the display panel.

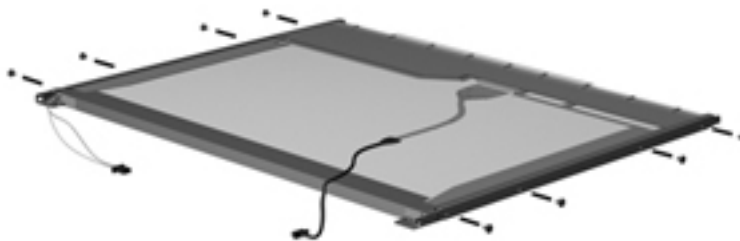


9. Use a sharp-edged tool to cut the tape **(1)** that secures the sides of the display panel to the display panel frame.

- 10.** Remove the display panel frame **(2)** from the display panel.

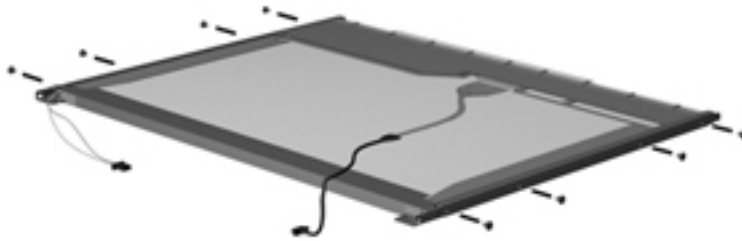

- 11.** Remove the screws **(1)** that secure the backlight cover to the display panel.


- 12.** Lift the top edge of the backlight cover **(2)** and swing it outward.

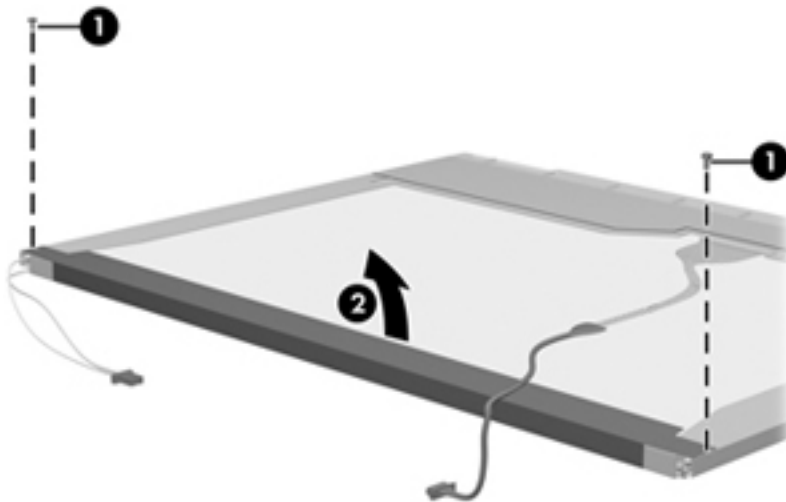

- 13.** Remove the backlight cover.


- 14.** Turn the display panel right-side up.

- 15.** Remove the backlight cables **(1)** from the clip **(2)** in the display panel.

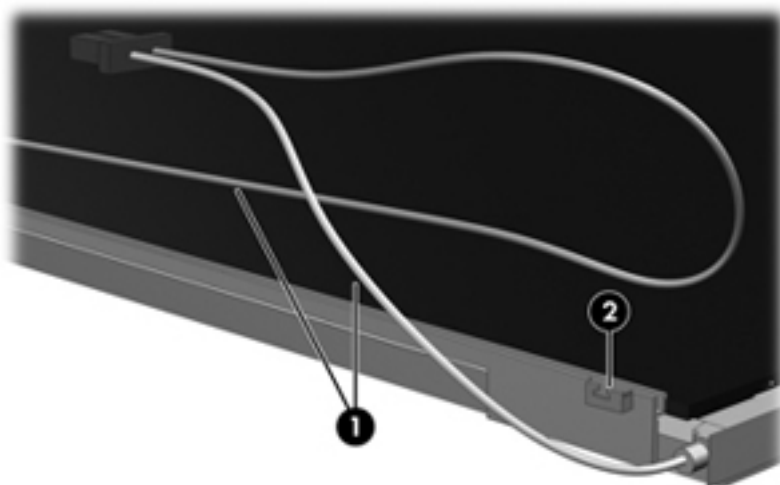


- 16.** Turn the display panel upside down.

- 17.** Remove the backlight frame from the display panel.

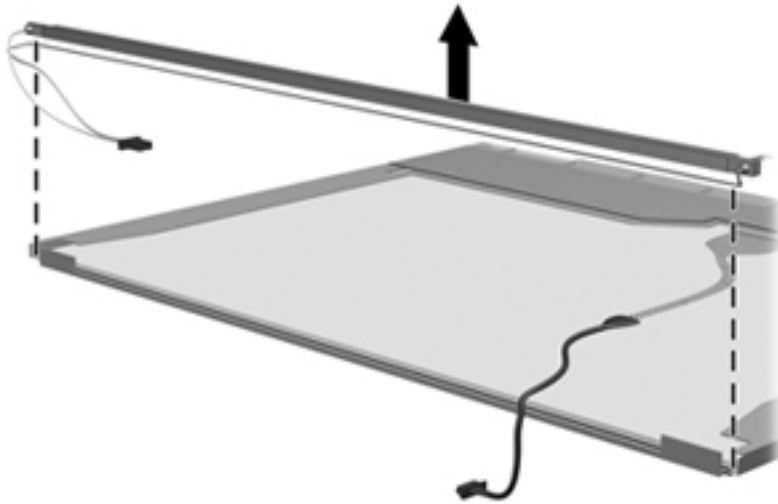


⚠ WARNING! The backlight contains mercury. Exercise caution when removing and handling the backlight to avoid damaging this component and causing exposure to the mercury.

- 18.** Remove the backlight from the backlight frame.

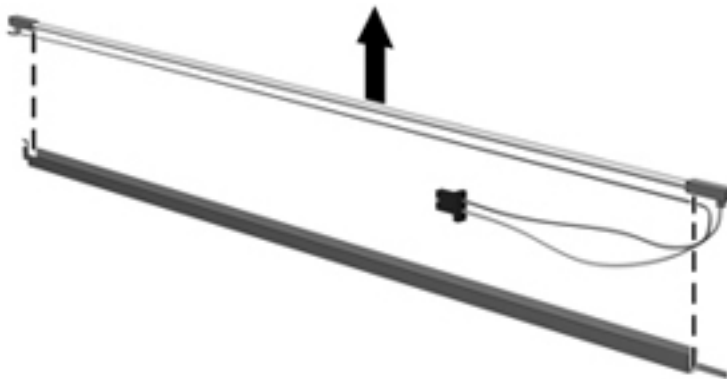


- 19.** Disconnect the display cable **(1)** from the LCD panel.
- 20.** Remove the screws **(2)** that secure the LCD panel to the display rear panel.
- 21.** Release the LCD panel **(3)** from the display rear panel.

22. Release the tape **(4)** that secures the LCD panel to the display rear panel.

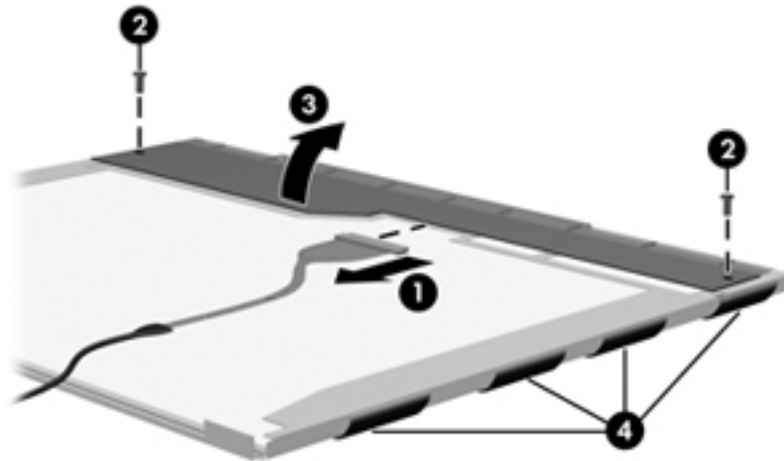

23. Remove the LCD panel.

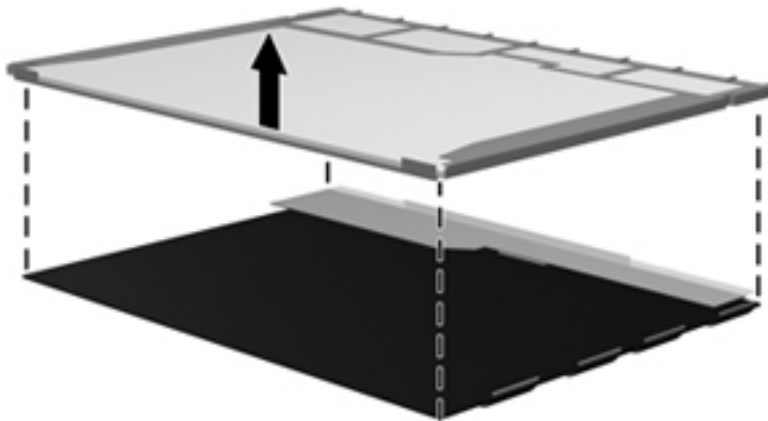

24. Recycle the LCD panel and backlight.

Index

A

- AC adapter light 18
- AC adapter, spare part numbers 31, 33
- Action keys 12
- antenna
 - locations 15
 - removal 100
 - spare part number 29, 37, 101
- Antenna Kit, spare part number 29, 37, 101
- audio, product description 5
- audio-in jack 17
- audio-out jack 17

B

- b key 12
- base enclosure, spare part number 26, 37
- battery
 - removal 45
 - spare part numbers 27, 33, 35, 45
- battery bay 19
- battery release latch 19
- Blu-ray Disc R/RW with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe
 - precautions 40
 - removal 46
 - spare part numbers 27, 31, 37, 38, 46
- Blu-ray Disc ROM with SuperMulti DVD±R/RW Double-Layer Drive with LightScribe
 - precautions 40

- removal 46

- spare part numbers 27, 31, 37, 46

- Bluetooth module

- removal 72

- spare part number 24, 33, 72

- Bluetooth module cable

- removal 73

- spare part number 24, 38, 72

- bottom components 19

- button components 10

- buttons

- optical drive eject 18

- power 10

- TouchPad 14

- Web browser 11

C

- Cable Kit, spare part number 24, 37
- cables, service considerations 39
- caps lock light 13
- chipset, product description 2
- components
 - bottom 19
 - buttons 10
 - display 15
 - front 16
 - keys 11
 - left-side 17
 - lights 13
 - right-side 18
 - TouchPad 14
- computer feet, locations 45
- computer major components 22
- connectors, service considerations 39

D

- device specifications 107
- Digital Media Slot 16
- display assembly
 - removal 94
 - spare part number 23, 37, 94
 - subcomponents 29
- display bezel
 - removal 96
 - spare part number 29, 37, 96
- Display Cable Kit, spare part number 29, 37, 100
- display components 15
- display enclosure, spare part number 29, 37
- Display Hinge Kit, spare part number 29, 37, 99
- display lid switch board
 - removal 68
 - spare part number 24, 38, 68
- display panel
 - product description 3
 - removal 97
 - spare part number 29, 38, 98
- display panel cable
 - removal 99
 - spare part number 29, 37, 100
- Display Rubber Kit, spare part number 29, 37
- Display Screw Kit, spare part number 29, 38
- display specifications 108
- drive light 18
- drives, preventing damage 40
- DVD±RW Double-Layer LightScribe SuperMulti Drive
 - precautions 40

- removal 46
- spare part numbers 27, 31, 37, 46

E

- electrostatic discharge 40
- equipment guidelines 43
- esc key 11
- Ethernet, product description 5
- external media cards, product description 6
- external monitor port 17

F

- fan/heat sink assembly
 - removal 82
 - spare part numbers 26, 37, 82
- feet, locations 45
- fingerprint reader board
 - removal 64
 - spare part number 24, 37, 64
- fingerprint reader light 13
- fingerprint reader, location 11
- fn key 11
- front components 16
- front speakers
 - removal 76
 - spare part number 24, 36, 76

G

- graphics, product description 3
- grounding guidelines 40
- guidelines
 - equipment 43
 - grounding 40
 - packaging 42
 - transporting 42
 - workstation 42

H

- hard drive
 - precautions 40
 - product description 4
 - removal 49
 - spare part numbers 26, 30, 33, 34, 35, 38, 49
 - specifications 109
- hard drive bay 19
- Hard Drive Hardware Kit, spare part number 27, 30, 38, 49

- HDMI port 17
- headphone jack 17
- hinge
 - removal 99
 - spare part number 29, 37, 99

J

- jacks
 - audio-in 17
 - audio-out 17
 - headphone 17
 - microphone 17
 - network 17
 - RJ-45 17

K

- key components 11
- keyboard
 - product description 7
 - removal 56
 - spare part numbers 23, 36, 56
- keys
 - Action 12
 - b 12
 - esc 11
 - fn 11
 - num lk 12
 - numeric keypad 12
 - Windows applications 12
 - Windows logo 11

L

- left-side components 17
- light components 13
- lights
 - AC adapter 18
 - caps lock 13
 - drive 18
 - fingerprint reader 13
 - mute 13
 - optical drive 18
 - power 13, 18
 - TouchPad off 13, 14
 - TouchPad on 13, 14
 - webcam 15
 - wireless 13

M

- mass storage device
 - precautions 40

- removal 46
- spare part numbers 26, 27, 30, 46
- memory module
 - product description 3
 - removal 53
 - spare part numbers 27, 34, 37, 53
- microphone
 - locations 15
 - product description 5
- microphone jack 17
- model name 1
- monitor port 17
- mute light 13

N

- network jack 17
- num lk key 12
- numeric keypad 12

O

- operating system, product description 8
- optical drive
 - location 18
 - precautions 40
 - product description 4
 - removal 46
 - spare part numbers 27, 31, 37, 46
- optical drive bezel, illustrated 31
- optical drive bracket
 - illustrated 31
 - removal 48
- optical drive cable
 - illustrated 31
 - removal 90
- optical drive eject button 18
- Optical Drive Hardware Kit, spare part number 27, 31, 38, 46
- optical drive light 18

P

- packaging guidelines 42
- plastic parts, service considerations 39
- Plastics Kit, spare part number 37
- pointing device, product description 7

- ports
 - external monitor 17
 - HDMI 17
 - monitor port 17
 - product description 6
 - SuperSpeed USB 17
 - USB 17, 18
- power button 10
- power button board
 - removal 66
 - spare part number 24, 37, 66
- power connector 18
- power connector cable, removal 78
- power cord
 - requirements for all countries 117
 - requirements for specific countries and regions 118
 - set requirements 117
 - spare part numbers 31, 32, 33
- power light 13, 18
- power requirements, product description 7
- processor
 - product description 1
 - removal 86
 - spare part numbers 25, 33, 34, 35, 86
- product description
 - audio 5
 - chipset 2
 - display panel 3
 - Ethernet 5
 - external media cards 6
 - graphics 3
 - hard drives 4
 - keyboard 7
 - memory module 3
 - microphone 5
 - operating system 8
 - optical drive 4
 - pointing device 7
 - ports 6
 - power requirements 7
 - processors 1
 - product name 1
 - security 7
 - serviceability 8
 - video 5
 - wireless 5
- product name 1
- R**
 - rear speakers
 - removal 91
 - spare part number 26, 37, 91
 - recycling
 - battery 119
 - display 119
 - remote control, spare part number 32
 - removal/replacement
 - preliminaries 39
 - procedures 44
 - right-side components 18
 - RJ-45 jack 17
 - RTC battery
 - removal 52
 - spare part number 27, 37, 52
- S**
 - Screw Kit, spare part number 32, 36
 - SD Card reader board
 - removal 70
 - spare part number 24, 37, 70
 - security cable slot 18
 - security, product description 7
 - service considerations
 - cables 39
 - connectors 39
 - plastic parts 39
 - service cover
 - removal 47
 - spare part number 28
 - service tag 21, 44
 - serviceability, product description 8
 - Setup Utility (BIOS) 102
 - solid-state drive
 - precautions 40
 - spare part number 27, 31, 37, 49
 - speakers
 - locations 16
 - removal 76, 91
 - spare part numbers 24, 26, 36, 37, 76, 91
- specifications
 - device 107
 - display 108
 - hard drive 109
- subwoofer
 - location 19
 - removal 93
 - spare part number 26, 35, 93
- SuperSpeed USB port 17
- system board
 - removal 79
 - spare part numbers 24, 35, 38, 79
- System Diagnostics 102
- T**
 - Thermal Material Kit, spare part numbers 25, 26, 37, 38, 79, 82, 87
 - tools required 39
 - top cover
 - removal 60
 - spare part number 23, 35, 60
 - TouchPad button 14
 - TouchPad components 14
 - TouchPad icon 14
 - TouchPad off light 13, 14
 - TouchPad on light 13, 14
 - TouchPad zone 14
 - transporting guidelines 42
- U**
 - USB board
 - removal 74
 - spare part number 24, 38
 - USB DVB-T dipole antenna, spare part number 32, 33
 - USB DVB-T TV tuner, spare part number 32, 33
 - USB port 17, 18
- V**
 - vents 17, 19
 - video, product description 5
- W**
 - Web browser button 11
 - webcam 15
 - webcam light 15

- webcam/microphone module
 - removal 98
 - spare part number 29, 35, 98
- Windows applications key 12
- Windows logo key 11
- wireless antenna
 - locations 15
 - removal 100
 - spare part number 29, 37, 101
- wireless light 13
- wireless, product description 5
- WLAN module
 - removal 54
 - spare part numbers 28, 33, 34, 37, 54
- workstation guidelines 42